OIL ANALYSIS REPORT

Sample Rating Trend

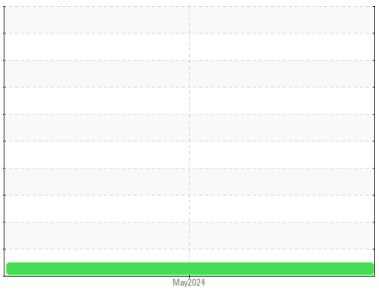

NORMAL

Area

[146479]

Machine Id

LINK-BELT TCC-800 U1L2-7108

Component

Hydraulic System

Fluid

ISO 3448-1975 (--- GAL)

DIAGNOSIS

Recommendation

Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

There is no indication of any contamination in the oil. The amount and size of particulates present in the system are acceptable.

Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

SAMPLE INFORMATION		method	limit/base	current	history1	history2
Sample Number		Client Info		**LBC0000103**	---	---
Sample Date		Client Info		**28 May 2024**	---	---
Machine Age	hrs	Client Info		**297**	---	---
Oil Age	hrs	Client Info		**0**	---	---
Oil Changed		Client Info		**Not Changd**	---	---
Sample Status				**NORMAL**	---	---

CONTAMINATION		method	limit/base	current	history1	history2
Water		WC Method	>0.1	**NEG**	---	---

WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>20	**0**	---	---
Chromium	ppm	ASTM D5185m	>10	**0**	---	---
Nickel	ppm	ASTM D5185m	>10	**0**	---	---
Titanium	ppm	ASTM D5185m		**0**	---	---
Silver	ppm	ASTM D5185m		**0**	---	---
Aluminum	ppm	ASTM D5185m	>10	**0**	---	---
Lead	ppm	ASTM D5185m	>10	**<1**	---	---
Copper	ppm	ASTM D5185m	>75	**<1**	---	---
Tin	ppm	ASTM D5185m	>10	**0**	---	---
Vanadium	ppm	ASTM D5185m		**0**	---	---
Cadmium	ppm	ASTM D5185m		**0**	---	---

ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m		**0**	---	---
Barium	ppm	ASTM D5185m		**0**	---	---
Molybdenum	ppm	ASTM D5185m		**0**	---	---
Manganese	ppm	ASTM D5185m		**0**	---	---
Magnesium	ppm	ASTM D5185m		**1**	---	---
Calcium	ppm	ASTM D5185m		**143**	---	---
Phosphorus	ppm	ASTM D5185m		**489**	---	---
Zinc	ppm	ASTM D5185m		**636**	---	---
Sulfur	ppm	ASTM D5185m		**1771**	---	---

CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>20	**2**	---	---
Sodium	ppm	ASTM D5185m		**1**	---	---
Potassium	ppm	ASTM D5185m	>20	**<1**	---	---

FLUID CLEANLINESS		method	limit/base	current	history1	history2
Particles >4µm		ASTM D7647	>5000	**2188**	---	---
Particles >6µm		ASTM D7647	>1300	**473**	---	---
Particles >14µm		ASTM D7647	>160	**43**	---	---
Particles >21µm		ASTM D7647	>40	**11**	---	---
Particles >38µm		ASTM D7647	>10	**2**	---	---
Particles >71µm		ASTM D7647	>3	**0**	---	---
Oil Cleanliness		ISO 4406 (c)	>19/17/14	**18/16/13**	---	---

FLUID DEGRADATION		method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D8045		**0.30**	---	---

OIL ANALYSIS REPORT

Particle Trend

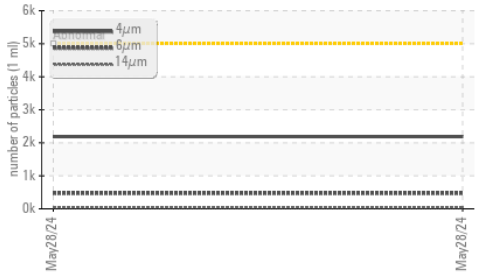

Acid Number

Viscosity @ 40°C

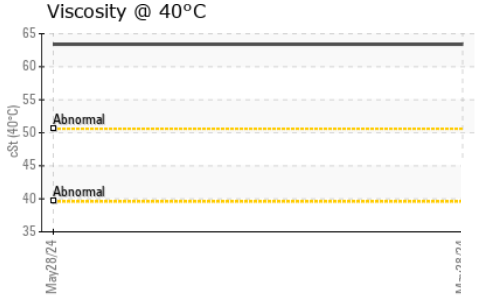

Particle Trend

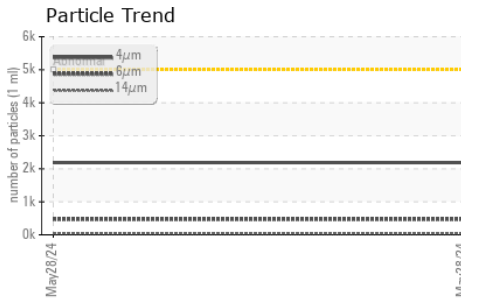

VISUAL		method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	**NONE**	---	---
Yellow Metal	scalar	*Visual	NONE	**NONE**	---	---
Precipitate	scalar	*Visual	NONE	**NONE**	---	---
Silt	scalar	*Visual	NONE	**NONE**	---	---
Debris	scalar	*Visual	NONE	**NONE**	---	---
Sand/Dirt	scalar	*Visual	NONE	**NONE**	---	---
Appearance	scalar	*Visual	NORML	**NORML**	---	---
Odor	scalar	*Visual	NORML	**NORML**	---	---
Emulsified Water	scalar	*Visual	>0.1	**NEG**	---	---
Free Water	scalar	*Visual		**NEG**	---	---

FLUID PROPERTIES		method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D445		**63.4**	---	---

SAMPLE IMAGES	method	limit/base	current	history1	history2
Color				*no image*	*no image*
Bottom				*no image*	*no image*

GRAPHS

Ferrous Alloys

Non-ferrous Metals

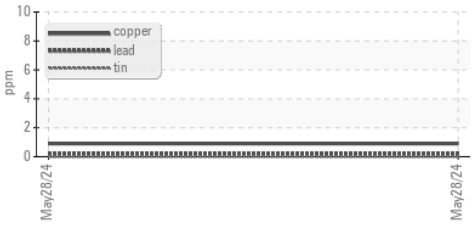

Viscosity @ 40°C

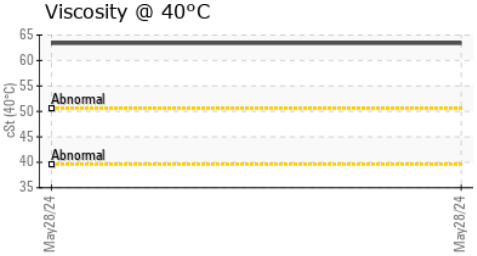

Particle Count

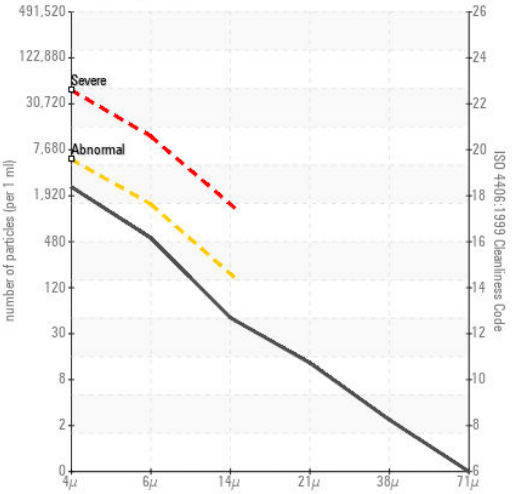

Acid Number

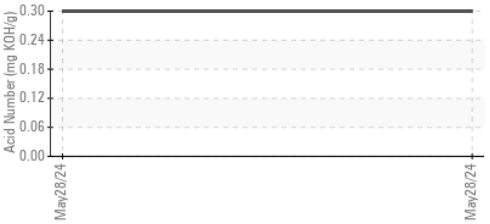

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : LBC0000103
Lab Number : 06196602
Unique Number : 11058725
Test Package : CONST

Received : 31 May 2024
Tested : 03 Jun 2024
Diagnosed : 03 Jun 2024 - Don Baldridge

Columbus Equipment Co. - P103900
2329 Performance Way
Columbus, OH
US 43207
Contact: JASON LANG
jasonl@columbusequipment.com
T:
F:

Certificate L2367

To discuss this sample report, contact Customer Service at 1-800-237-1369.
** - Denotes test methods that are outside of the ISO 17025 scope of accreditation.*
Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)