

OIL ANALYSIS REPORT

Sample Rating Trend





VOLVO L90H 625992 Component Hydraulic System

VOLVO SUPER HYDRAULIC OIL 46 (25 GAL)

IAGNOSIS	SAMPLE INFORM	NATION	method	limit/base	current	history1	history
ecommendation	Sample Number		Client Info		ML0000065		
corrective action is recommended at this time.	Sample Date		Client Info		28 May 2024		
ample at the next service interval to monitor.	Machine Age	hrs	Client Info		4027		
ar	Oil Age	hrs	Client Info		4027		
component wear rates are normal.	Oil Changed		Client Info		Changed		
contamination	Sample Status				ATTENTION		
re is a moderate amount of particulates present ne oil.	CONTAMINATIO	N	method	limit/base	current	history1	history
id Condition	Water		WC Method	>0.1	NEG		
The AN level is acceptable for this fluid. The ondition of the oil is suitable for further service.	WEAR METALS		method	limit/base	current	history1	history
	Iron	ppm	ASTM D5185m	>50	5		
	Chromium	ppm	ASTM D5185m	>20	<1		
	Nickel	ppm	ASTM D5185m	>10	0		
	Titanium	ppm	ASTM D5185m		0		
	Silver	ppm	ASTM D5185m		0		
	Aluminum	ppm	ASTM D5185m	>20	0		
	Lead	ppm	ASTM D5185m	>20	<1		
	Copper	ppm	ASTM D5185m	>150	2		
	Tin	ppm	ASTM D5185m	>20	0		
	Vanadium	ppm	ASTM D5185m		0		
	Cadmium	ppm	ASTM D5185m		0		
	ADDITIVES		method	limit/base	current	history1	histor
	Boron	ppm	ASTM D5185m	14	0		
	Barium	ppm	ASTM D5185m	0.0	0		
	Molybdenum	ppm	ASTM D5185m	0.0	0		
	Manganese	ppm	ASTM D5185m	0.0	0		
	Magnesium	ppm	ASTM D5185m	2.6	3		
	Calcium	ppm	ASTM D5185m	49	66		
	Phosphorus	ppm	ASTM D5185m	354	335		
	Zinc	ppm	ASTM D5185m	419	439		
	Sulfur	ppm	ASTM D5185m	3719	2200		
	CONTAMINANTS	3	method	limit/base	current	history1	histor
	Silicon	ppm	ASTM D5185m	>20	3		
	Sodium	ppm	ASTM D5185m		2		
	Potassium	ppm	ASTM D5185m	>20	<1		
	FLUID CLEANLIN	IESS	method	limit/base	current	history1	histor
	Particles >4µm		ASTM D7647		3249		
			ASTM D7647	>2500	1040		
	Particles >6µm			00	89		
	Particles >6µm Particles >14µm		ASTM D7647	>80			
			ASTM D7647 ASTM D7647		23		
	Particles >14µm			>20			
	Particles >14µm Particles >21µm		ASTM D7647	>20 >4	23		
	Particles >14µm Particles >21µm Particles >38µm		ASTM D7647 ASTM D7647	>20 >4 >3	23 2		
	Particles >14µm Particles >21µm Particles >38µm Particles >71µm		ASTM D7647 ASTM D7647 ASTM D7647	>20 >4 >3	23 2 0 19/17/14		

Report Id: VOLVO0150 [WUSCAR] 06196614 (Generated: 06/03/2024 11:26:02) Rev: 1

Submitted By: Emylio Pineda Page 1 of 2



sajoji 2k

± 21

11

Ok

31 2k

2

18

Ok

0.50

(B/HO) Ê0.30 E 0.20

Pio 0.1

0.00

52

50

41

() 46 0+0+44

रते ₄₂

40

38

36

OIL ANALYSIS REPORT

NONE

NONE

NONE

NONE

NONE

NONE

NORML

NORML

NEG

NEG

41.4

Particle Count

Acid Number

30 720 7,680

1,920

480

120

30

동 0.40

Ē 0.30

· 문 0.20

0.00

Acid Ni 0.10 no image

no image


no image

no imade

4406

:1999 Cle

14

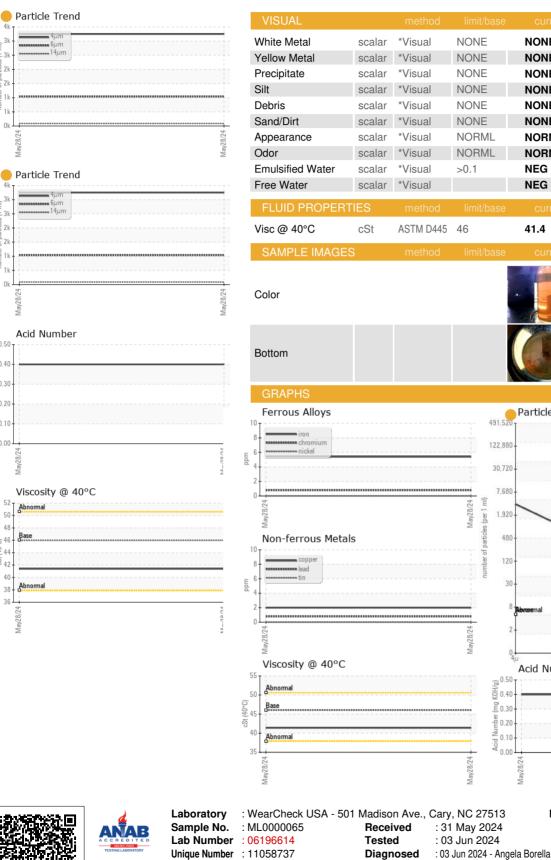

MCCLUNG-LOGAN EQUIPMENT CO - BALTIMORE 4601 WASHINGTON BOULEVARD BALTIMORE, MD US 21227 Contact: Emylio Pineda epineda@mcclung-logan.com T:

214

28

Report Id: VOLVO0150 [WUSCAR] 06196614 (Generated: 06/03/2024 11:26:02) Rev: 1

Certificate 12367

Test Package : CONST

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

Submitted By: Emylio Pineda

F: (410)242-7835

Page 2 of 2