




# OIL ANALYSIS REPORT

Sample Rating Trend

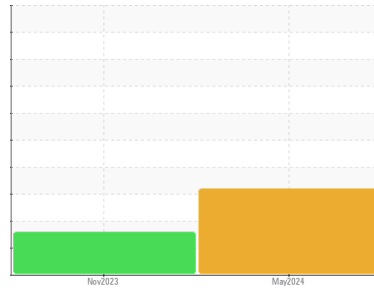

DIRT



Machine Id  
**FRENCH PRESSES PUMP STATION GROUP 1 & 2**  
 Component  
**Hydraulic System**  
 Fluid  
**SAFETY-KLEEN PERFORMANCE PLUS AW EX 46 (3000 GAL)**

## DIAGNOSIS

### ▲ Recommendation

We recommend you service the filters on this component. Resample at the next service interval to monitor.

### Wear

All component wear rates are normal.

### ▲ Contamination

There is a high amount of particulates present in the oil. Elemental level of silicon (Si) above normal.

### Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is acceptable for the time in service.

## SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		<b>WC0885371</b>	WC0792615	---
Sample Date	Client Info		<b>14 May 2024</b>	15 Nov 2023	---
Machine Age	yrs	Client Info	<b>0</b>	20	---
Oil Age	yrs	Client Info	<b>0</b>	0	---
Oil Changed	Client Info		<b>N/A</b>	N/A	---
Sample Status			<b>ABNORMAL</b>	ABNORMAL	---

## CONTAMINATION

	method	limit/base	current	history1	history2
Water	WC Method	>0.05	<b>NEG</b>	NEG	---

## WEAR METALS

	method	limit/base	current	history1	history2	
Iron	ppm	ASTM D5185m	>20	<b>8</b>	9	---
Chromium	ppm	ASTM D5185m	>20	<b>0</b>	<1	---
Nickel	ppm	ASTM D5185m	>20	<b>0</b>	<1	---
Titanium	ppm	ASTM D5185m		<b>0</b>	<1	---
Silver	ppm	ASTM D5185m		<b>0</b>	0	---
Aluminum	ppm	ASTM D5185m	>20	<b>0</b>	2	---
Lead	ppm	ASTM D5185m	>20	<b>&lt;1</b>	1	---
Copper	ppm	ASTM D5185m	>20	<b>11</b>	12	---
Tin	ppm	ASTM D5185m	>20	<b>0</b>	<1	---
Vanadium	ppm	ASTM D5185m		<b>&lt;1</b>	0	---
Cadmium	ppm	ASTM D5185m		<b>0</b>	<1	---

## ADDITIVES

	method	limit/base	current	history1	history2	
Boron	ppm	ASTM D5185m		<b>0</b>	0	---
Barium	ppm	ASTM D5185m		<b>0</b>	4	---
Molybdenum	ppm	ASTM D5185m		<b>0</b>	<1	---
Manganese	ppm	ASTM D5185m		<b>0</b>	<1	---
Magnesium	ppm	ASTM D5185m		<b>&lt;1</b>	2	---
Calcium	ppm	ASTM D5185m		<b>36</b>	31	---
Phosphorus	ppm	ASTM D5185m		<b>320</b>	333	---
Zinc	ppm	ASTM D5185m		<b>345</b>	337	---
Sulfur	ppm	ASTM D5185m		<b>2405</b>	2326	---

## CONTAMINANTS

	method	limit/base	current	history1	history2	
Silicon	ppm	ASTM D5185m	>15	<b>▲ 21</b>	▲ 22	---
Sodium	ppm	ASTM D5185m		<b>4</b>	3	---
Potassium	ppm	ASTM D5185m	>20	<b>2</b>	3	---

## FLUID CLEANLINESS


	method	limit/base	current	history1	history2
Particles >4µm	ASTM D7647		<b>12732</b>	1830	---
Particles >6µm	ASTM D7647	>1300	<b>▲ 3829</b>	159	---
Particles >14µm	ASTM D7647	>160	<b>▲ 274</b>	17	---
Particles >21µm	ASTM D7647	>40	<b>▲ 61</b>	5	---
Particles >38µm	ASTM D7647	>10	<b>3</b>	1	---
Particles >71µm	ASTM D7647	>3	<b>0</b>	0	---
Oil Cleanliness	ISO 4406 (c)	>--/17/14	<b>▲ 21/19/15</b>	18/14/11	---

## FLUID DEGRADATION


	method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D8045	<b>0.35</b>	0.28	---

# OIL ANALYSIS REPORT

## ▲ Particle Trend

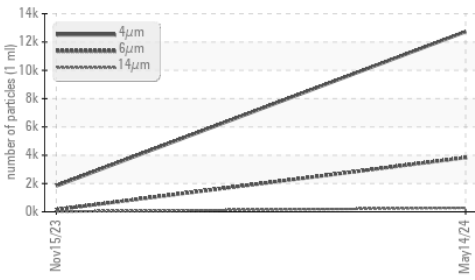


## ▲ Silicon (ppm)

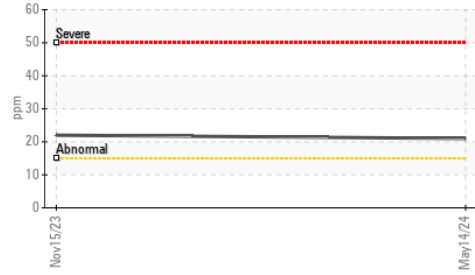


## ▲ Silicon (ppm)



## Acid Number

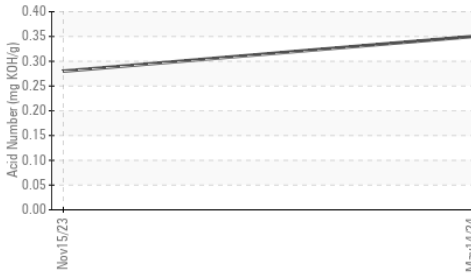


## Viscosity @ 40°C

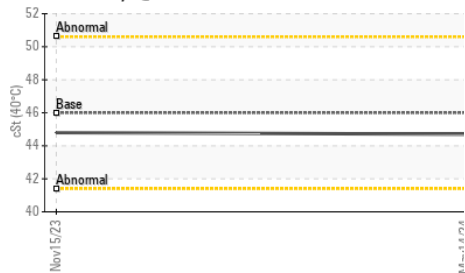

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	---
Yellow Metal	scalar	*Visual	NONE	NONE	---
Precipitate	scalar	*Visual	NONE	NONE	---
Silt	scalar	*Visual	NONE	NONE	---
Debris	scalar	*Visual	NONE	NONE	---
Sand/Dirt	scalar	*Visual	NONE	NONE	---
Appearance	scalar	*Visual	NORML	NORML	---
Odor	scalar	*Visual	NORML	NORML	---
Emulsified Water	scalar	*Visual	>0.05	NEG	---
Free Water	scalar	*Visual		NEG	---


FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D445	46	44.8	---

SAMPLE IMAGES	method	limit/base	current	history1	history2
---------------	--------	------------	---------	----------	----------

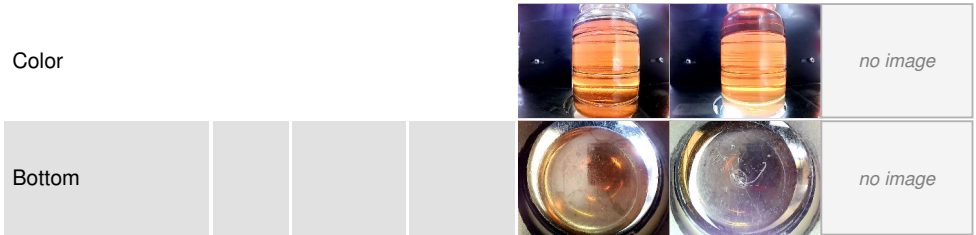


## GRAPHS


### Ferrous Alloys

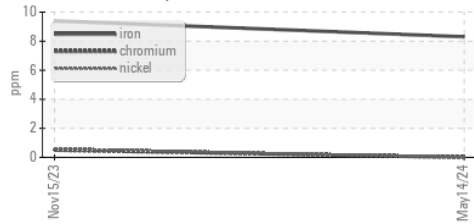


### Non-ferrous Metals

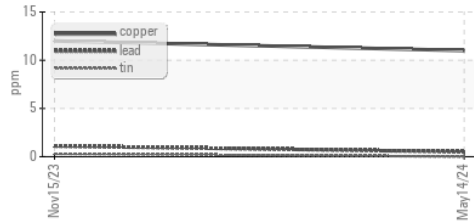


### Viscosity @ 40°C

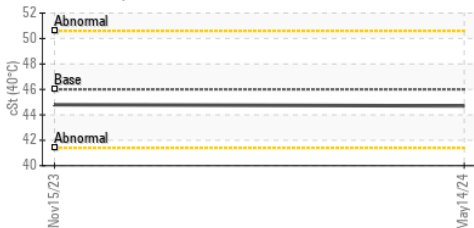

### ▲ Particle Count

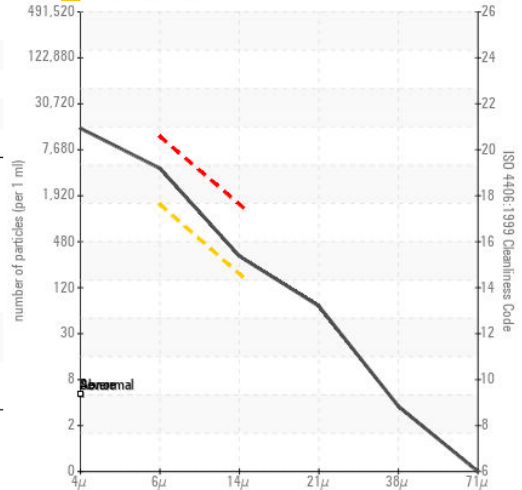

### Acid Number

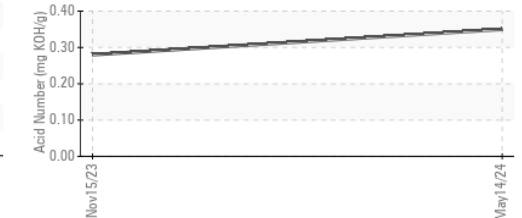

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : WC0885371  
**Lab Number** : 06196625  
**Unique Number** : 11058748  
**Test Package** : IND 2

**Received** : 31 May 2024  
**Tested** : 03 Jun 2024  
**Diagnosed** : 03 Jun 2024 - Don Baldrige

**ROBINSON RUBBER**  
 4600 QUEBEC AVE. NORTH  
 MINNEAPOLIS, MN  
 US 55428  
 Contact: DENNIS YOUNG  
 dyoung@robinsonrubber.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T: (763)535-6737

F: (763)535-0828