


# **OIL ANALYSIS REPORT**

# [POST FILTER] T2-LFG (S/N 10241H19727554Z)

Screw Compressor

ISEL ESTER GAS COMPRESSOR 6029-68 (--- GAL)





### Recommendation

No corrective action is recommended at this time. Resample at the next service interval to monitor.

All component wear rates are normal.

### Contamination

There is no indication of any contamination in the oil. The amount and size of particulates present in the system are acceptable.


### **Fluid Condition**

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

,						
SAMPLE INFORM	MATION	method	limit/base	current	history1	history2
Sample Number		Client Info		TO10003440	TO10003441	
Sample Date		Client Info		31 May 2024	30 May 2024	
Machine Age	hrs	Client Info		0	0	
Oil Age	hrs	Client Info		0	0	
Oil Changed		Client Info		N/A	N/A	
Sample Status				NORMAL	ATTENTION	
WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>60	0	<1	
Chromium	ppm	ASTM D5185m	>4	<1	<1	
Nickel	ppm	ASTM D5185m		0	0	
Titanium	ppm	ASTM D5185m		<1	<1	
Silver	ppm	ASTM D5185m		0	0	
Aluminum	ppm	ASTM D5185m	>5	2	2	
Lead	ppm	ASTM D5185m	>10	<1	<1	
Copper	ppm	ASTM D5185m	>30	<1	<1	
Tin	ppm	ASTM D5185m	>15	<1	<1	
Vanadium	ppm	ASTM D5185m		0	0	
Cadmium	ppm	ASTM D5185m		0	0	
ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m		0	0	
Barium	ppm	ASTM D5185m		<1	<1	
Molybdenum	ppm	ASTM D5185m		<1	<1	
Manganese	ppm	ASTM D5185m		0	0	
Magnesium	ppm	ASTM D5185m		<1	<1	
Calcium	ppm	ASTM D5185m		0	0	
Phosphorus	ppm	ASTM D5185m		422	416	
Zinc	ppm	ASTM D5185m		0	0	
Sulfur	ppm	ASTM D5185m		262	241	
CONTAMINANTS	\$	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>50	19	15	
Sodium	ppm	ASTM D5185m		0	0	
Potassium	ppm	ASTM D5185m	>20	<1	1	
Water	%	ASTM D6304	>0.1	0.012	0.012	
ppm Water	ppm	ASTM D6304	>1000	127	128	
FLUID CLEANLIN	IESS	method	limit/base	current	history1	history2
Particles >4µm		ASTM D7647	>10000	3603	15765	
Particles >6µm		ASTM D7647	>2500	767	4194	
Particles >14µm		ASTM D7647	>320	30	117	
Particles >21µm		ASTM D7647	>80	8	17	
Particles >38µm		ASTM D7647	>20	0	0	
Particles >71µm		ASTM D7647	>4	0	0	
Oil Cleanliness		ISO 4406 (c)	>20/18/15	19/17/12	21/19/14	
FLUID DEGRADA	NOITA	method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D8045		0.80	0.74	



## **OIL ANALYSIS REPORT**

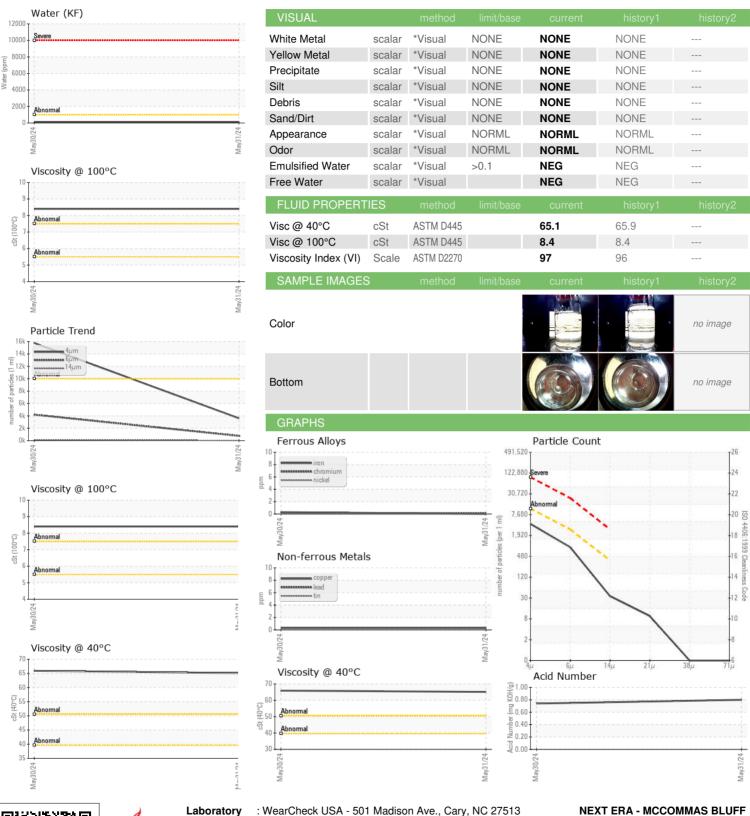





Laboratory Sample No.

Lab Number : 06196754 Unique Number: 11058877

: TO10003440

Received : 31 May 2024 **Tested** : 03 Jun 2024 Diagnosed

: 03 Jun 2024 - Doug Bogart

DALLAS, TX US Contact: Service Manager

Test Package : IND 2 (Additional Tests: KF, KV100, PrtCount, VI) Certificate 12367 To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation. Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012) T:

F: