

OIL ANALYSIS REPORT

Sample Rating Trend

NORMAL



Machine Id

T1-LFG (S/N 10241E02723327)

Screw Compressor

ISEL ESTER GAS COMPRESSOR 6029-68 (

Recommendation

No corrective action is recommended at this time. Resample at the next service interval to monitor.

All component wear rates are normal.

Contamination

There is no indication of any contamination in the oil. The amount and size of particulates present in the system are acceptable.

Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

| (GAL) | | | | May2024 | | |
|------------------|----------|--------------|------------|-------------|----------|----------|
| , | | | | | | |
| SAMPLE INFORM | ATION | method | limit/base | current | history1 | history2 |
| Sample Number | | Client Info | | TO10003186 | | |
| Sample Date | | Client Info | | 30 May 2024 | | |
| Machine Age | hrs | Client Info | | 0 | | |
| Oil Age | hrs | Client Info | | 0 | | |
| Oil Changed | | Client Info | | N/A | | |
| Sample Status | | | | NORMAL | | |
| WEAR METALS | | method | limit/base | current | history1 | history2 |
| ron | ppm | ASTM D5185m | >60 | 0 | | |
| Chromium | ppm | ASTM D5185m | >4 | <1 | | |
| Nickel | ppm | ASTM D5185m | | 0 | | |
| Titanium | ppm | ASTM D5185m | | <1 | | |
| Silver | ppm | ASTM D5185m | | 0 | | |
| Aluminum | ppm | ASTM D5185m | >5 | 2 | | |
| _ead | ppm | ASTM D5185m | >10 | <1 | | |
| Copper | ppm | ASTM D5185m | >30 | <1 | | |
| Tin | ppm | ASTM D5185m | >15 | <1 | | |
| Vanadium | ppm | ASTM D5185m | | 0 | | |
| Cadmium | ppm | ASTM D5185m | | 0 | | |
| ADDITIVES | | method | limit/base | current | history1 | history2 |
| Boron | ppm | ASTM D5185m | | 0 | | |
| Barium | ppm | ASTM D5185m | | <1 | | |
| Molybdenum | ppm | ASTM D5185m | | <1 | | |
| Manganese | ppm | ASTM D5185m | | 0 | | |
| Magnesium | ppm | ASTM D5185m | | <1 | | |
| Calcium | ppm | ASTM D5185m | | 0 | | |
| Phosphorus | ppm | ASTM D5185m | | 384 | | |
| Zinc | ppm | ASTM D5185m | | 0 | | |
| Sulfur | ppm | ASTM D5185m | | 357 | | |
| CONTAMINANTS | | method | limit/base | current | history1 | history2 |
| Silicon | ppm | ASTM D5185m | >50 | 17 | | |
| Sodium | ppm | ASTM D5185m | | 0 | | |
| Potassium | ppm | ASTM D5185m | >20 | <1 | | |
| Water | % | ASTM D6304 | >0.1 | 0.011 | | |
| opm Water | ppm | ASTM D6304 | >1000 | 114 | | |
| FLUID CLEANLINI | ESS | method | limit/base | current | history1 | history2 |
| Particles >4µm | | ASTM D7647 | >10000 | 9830 | | |
| Particles >6µm | | ASTM D7647 | >2500 | 2156 | | |
| Particles >14µm | | ASTM D7647 | >320 | 56 | | |
| Particles >21µm | | ASTM D7647 | >80 | 12 | | |
| Particles >38µm | | ASTM D7647 | >20 | 0 | | |
| Particles >71µm | | ASTM D7647 | >4 | 0 | | |
| Oil Cleanliness | | ISO 4406 (c) | >20/18/15 | 20/18/13 | | |
| FLUID DEGRADA | TION | method | limit/base | current | history1 | history2 |
| Acid Number (AN) | ma K∩U/a | VCTM D004E | | 0.76 | | |


Acid Number (AN)

mg KOH/g ASTM D8045

0.76



OIL ANALYSIS REPORT

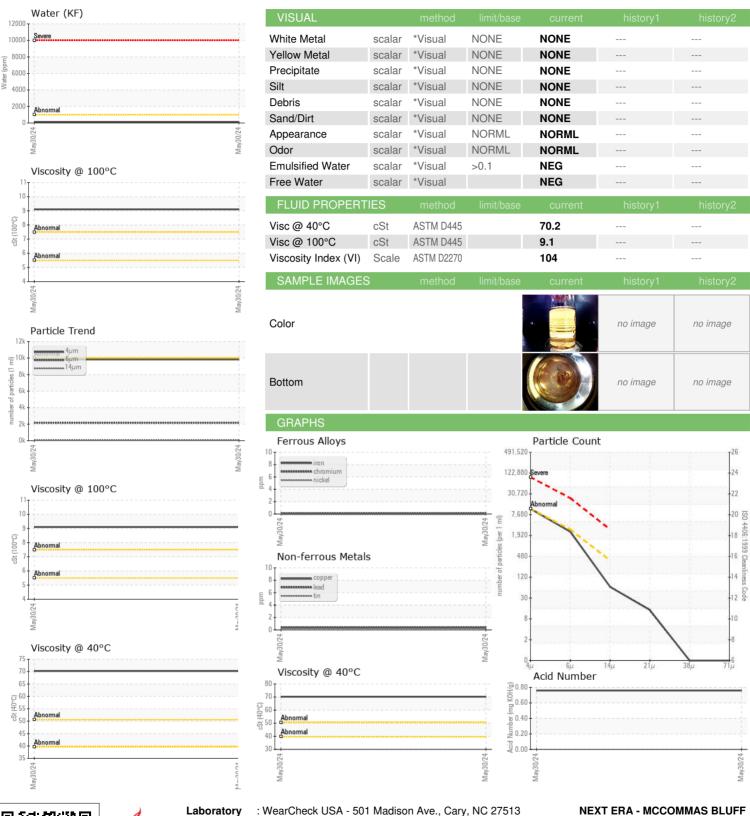



Laboratory Sample No.

: TO10003186 **Lab Number** : 06196755 Unique Number : 11058878

: WearCheck USA - 501 Madison Ave., Cary, NC 27513 Received : 31 May 2024

Tested : 03 Jun 2024 Diagnosed

: 03 Jun 2024 - Doug Bogart

DALLAS, TX US Contact: Service Manager

Test Package : IND 2 (Additional Tests: KF, KV100, PrtCount, VI) Certificate 12367 To discuss this sample report, contact Customer Service at 1-800-237-1369.

 st - Denotes test methods that are outside of the ISO 17025 scope of accreditation. Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

Report Id: NEXDAL [WUSCAR] 06196755 (Generated: 06/04/2024 07:09:28) Rev: 1

Contact/Location: Service Manager - NEXDAL

T:

F: