




# OIL ANALYSIS REPORT

Area  
**LFC-1030-CM-01-CM031 [1971565]**  
 Machine Id  
**MC01MT03-1030 - DMC DICER DRIVE**  
 Component  
**Gearbox**  
 Fluid  
**LE 4220 (--- GAL)**

Sample Rating Trend

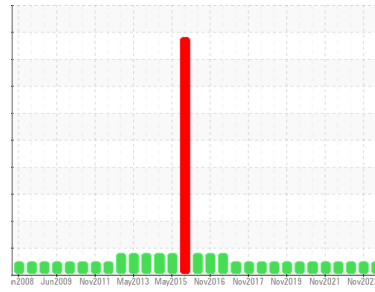

**NORMAL**



## DIAGNOSIS

### Recommendation

Resample at the next service interval to monitor.

### Wear

All component wear rates are normal.

### Contamination

There is no indication of any contamination in the oil.

### Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

## SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		<b>WC0935402</b>	WC0875151	WC0793916
Sample Date	Client Info		<b>28 May 2024</b>	09 Nov 2023	07 May 2023
Machine Age	days	Client Info	<b>90</b>	0	0
Oil Age	days	Client Info	<b>90</b>	0	0
Oil Changed	Client Info		<b>N/A</b>	N/A	N/A
Sample Status			<b>NORMAL</b>	NORMAL	NORMAL

## CONTAMINATION

	method	limit/base	current	history1	history2
Water	WC Method	>0.2	<b>NEG</b>	NEG	NEG

## WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >200	<b>47</b>	32	31
Chromium	ppm	ASTM D5185m >15	<b>0</b>	<1	<1
Nickel	ppm	ASTM D5185m >15	<b>0</b>	0	<1
Titanium	ppm	ASTM D5185m	<b>0</b>	<1	0
Silver	ppm	ASTM D5185m	<b>0</b>	0	0
Aluminum	ppm	ASTM D5185m >25	<b>0</b>	1	3
Lead	ppm	ASTM D5185m >100	<b>0</b>	0	<1
Copper	ppm	ASTM D5185m >200	<b>&lt;1</b>	<1	<1
Tin	ppm	ASTM D5185m >25	<b>0</b>	0	1
Vanadium	ppm	ASTM D5185m	<b>0</b>	0	0
Cadmium	ppm	ASTM D5185m	<b>0</b>	0	0

## ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	<b>&lt;1</b>	5	6
Barium	ppm	ASTM D5185m	<b>0</b>	0	0
Molybdenum	ppm	ASTM D5185m	<b>4</b>	5	5
Manganese	ppm	ASTM D5185m	<b>&lt;1</b>	<1	1
Magnesium	ppm	ASTM D5185m	<b>3</b>	7	8
Calcium	ppm	ASTM D5185m	<b>43</b>	41	47
Phosphorus	ppm	ASTM D5185m	<b>202</b>	209	223
Zinc	ppm	ASTM D5185m	<b>37</b>	34	40
Sulfur	ppm	ASTM D5185m	<b>15626</b>	15003	18502

## CONTAMINANTS



	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >50	<b>0</b>	<1	<1
Sodium	ppm	ASTM D5185m	<b>1</b>	2	2
Potassium	ppm	ASTM D5185m >20	<b>0</b>	<1	2

## FLUID DEGRADATION

	method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D8045	<b>0.35</b>	0.30	0.33




# OIL ANALYSIS REPORT

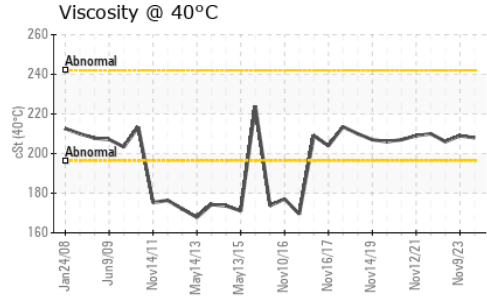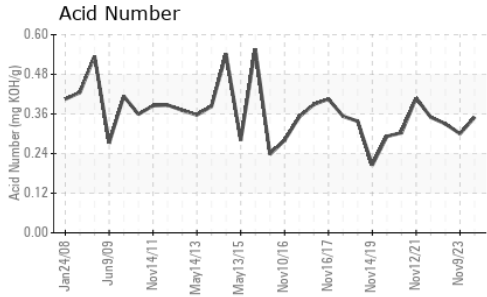





VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	LIGHT
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D445	<b>208</b>	209	206

SAMPLE IMAGES	method	limit/base	current	history1	history2
---------------	--------	------------	---------	----------	----------

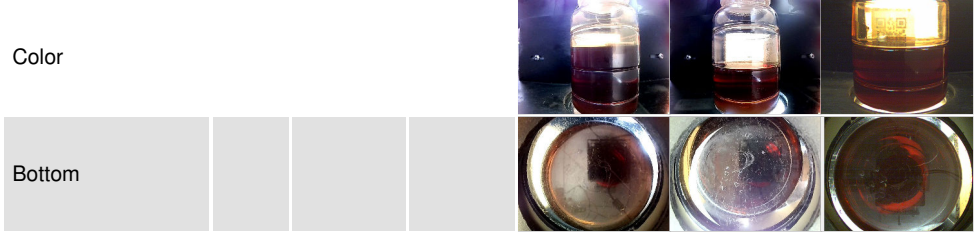

## GRAPHS

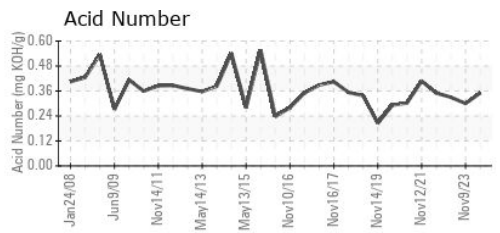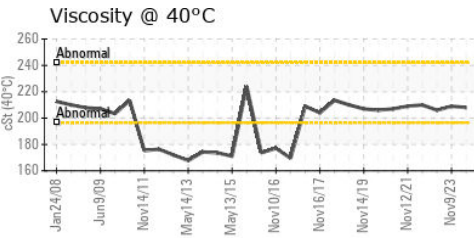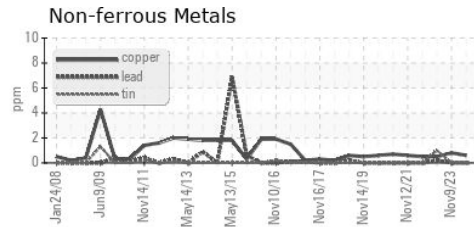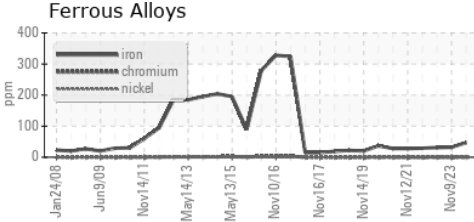

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : WC0935402      **Received** : 31 May 2024  
**Lab Number** : **06196835**      **Tested** : 05 Jun 2024  
**Unique Number** : 11058958      **Diagnosed** : 05 Jun 2024 - Don Baldrige  
**Test Package** : IND 2

**LEPRINO FOODS - ALLENDALE**  
 4700 RICH STREET  
 ALLENDALE, MI  
 US 49401  
 Contact: BILL FERRIER  
 BFERRIER@LEPRINOFOODS.COM

To discuss this sample report, contact Customer Service at 1-800-237-1369.  
 \* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.  
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)