




# OIL ANALYSIS REPORT

Sample Rating Trend

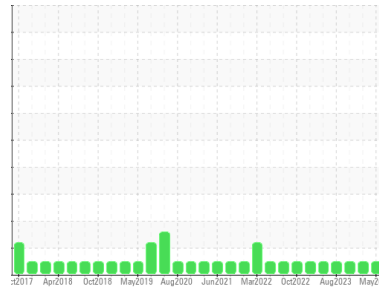

**NORMAL**



Machine Id  
**KENWORTH W900 200811**  
 Component  
**Diesel Engine**  
 Fluid  
**MOBIL DELVAC 1300 SUPER15W40 (12 GAL)**

## DIAGNOSIS

### Recommendation

Resample at the next service interval to monitor.

### Wear

All component wear rates are normal.

### Contamination

There is no indication of any contamination in the oil.

### Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

## SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		<b>RW0004907</b>	RW0004899	RW0004905
Sample Date	Client Info		<b>01 May 2024</b>	20 Mar 2024	31 Jan 2024
Machine Age	mls	Client Info	<b>346826</b>	333952	323800
Oil Age	mls	Client Info	<b>346826</b>	10058	10000
Oil Changed	Client Info		<b>Changed</b>	Changed	Changed
Sample Status			<b>NORMAL</b>	NORMAL	NORMAL

## CONTAMINATION

	method	limit/base	current	history1	history2
Fuel	WC Method	>3.0	<b>&lt;1.0</b>	<1.0	<1.0
Water	WC Method	>0.2	<b>NEG</b>	NEG	NEG
Glycol	WC Method		<b>NEG</b>	NEG	NEG

## WEAR METALS

	method	limit/base	current	history1	history2	
Iron	ppm	ASTM D5185m	>90	<b>13</b>	12	16
Chromium	ppm	ASTM D5185m	>20	<b>&lt;1</b>	0	<1
Nickel	ppm	ASTM D5185m	>2	<b>&lt;1</b>	0	0
Titanium	ppm	ASTM D5185m	>2	<b>&lt;1</b>	0	0
Silver	ppm	ASTM D5185m	>2	<b>&lt;1</b>	0	0
Aluminum	ppm	ASTM D5185m	>20	<b>1</b>	1	2
Lead	ppm	ASTM D5185m	>40	<b>1</b>	<1	<1
Copper	ppm	ASTM D5185m	>330	<b>&lt;1</b>	0	0
Tin	ppm	ASTM D5185m	>15	<b>&lt;1</b>	0	0
Vanadium	ppm	ASTM D5185m		<b>&lt;1</b>	0	0
Cadmium	ppm	ASTM D5185m		<b>&lt;1</b>	0	0

## ADDITIVES

	method	limit/base	current	history1	history2	
Boron	ppm	ASTM D5185m	0	<b>49</b>	51	43
Barium	ppm	ASTM D5185m	0	<b>2</b>	0	0
Molybdenum	ppm	ASTM D5185m	0	<b>46</b>	43	44
Manganese	ppm	ASTM D5185m		<b>&lt;1</b>	<1	<1
Magnesium	ppm	ASTM D5185m	0	<b>548</b>	577	576
Calcium	ppm	ASTM D5185m		<b>1836</b>	1968	1997
Phosphorus	ppm	ASTM D5185m		<b>910</b>	881	884
Zinc	ppm	ASTM D5185m		<b>1013</b>	1041	1058
Sulfur	ppm	ASTM D5185m		<b>2832</b>	3263	3292

## CONTAMINANTS

	method	limit/base	current	history1	history2	
Silicon	ppm	ASTM D5185m	>25	<b>8</b>	6	6
Sodium	ppm	ASTM D5185m		<b>3</b>	3	2
Potassium	ppm	ASTM D5185m	>20	<b>8</b>	3	3

## INFRA-RED




	method	limit/base	current	history1	history2	
Soot %	%	*ASTM D7844	>6	<b>0.5</b>	0.4	0.4
Nitration	Abs/cm	*ASTM D7624	>20	<b>9.2</b>	8.9	9.8
Sulfation	Abs/.1mm	*ASTM D7415	>30	<b>23.5</b>	23.1	23.4

## FLUID DEGRADATION

	method	limit/base	current	history1	history2	
Oxidation	Abs/.1mm	*ASTM D7414	>25	<b>22.0</b>	22.2	22.7
Base Number (BN)	mg KOH/g	ASTM D2896	9.4	<b>9.11</b>	9.03	8.85











# OIL ANALYSIS REPORT

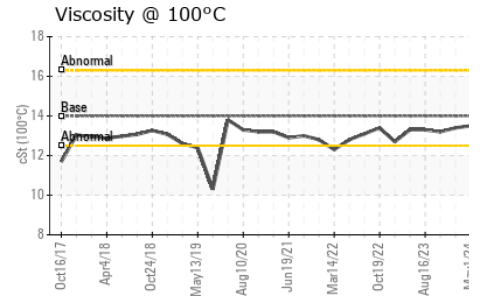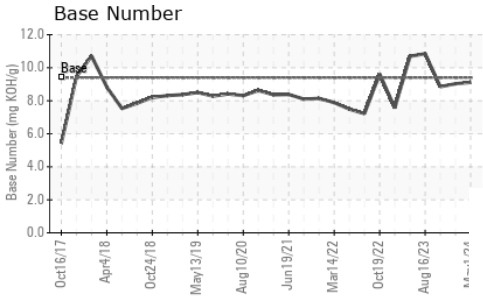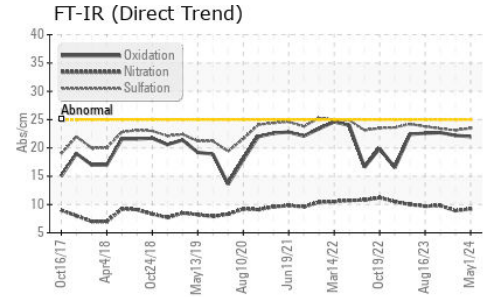

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D445 14	<b>13.5</b>	13.4	13.2

### GRAPHS

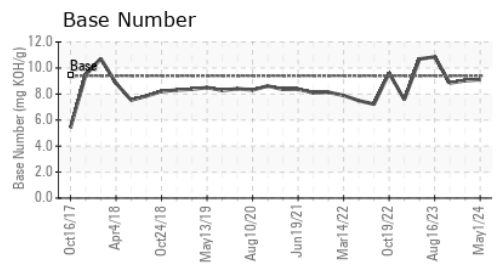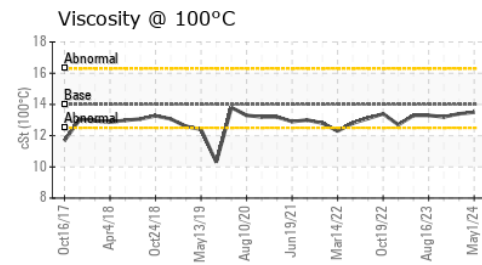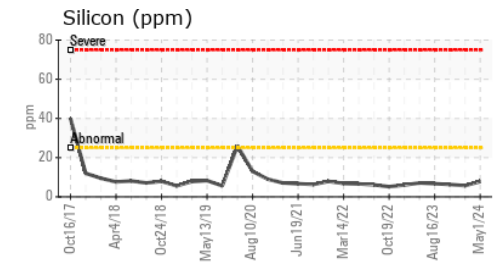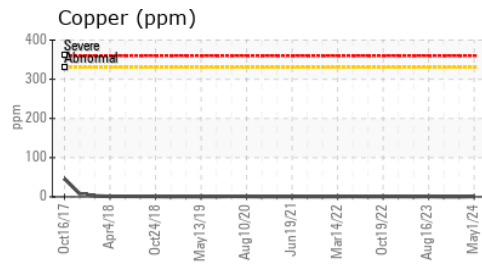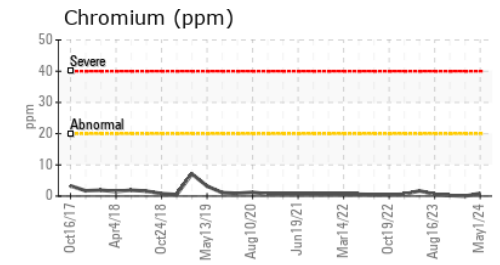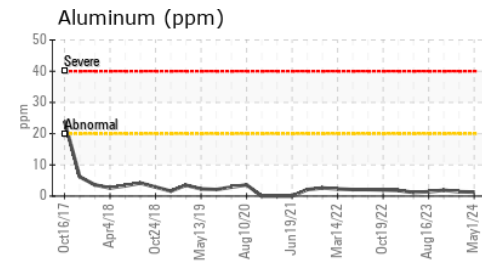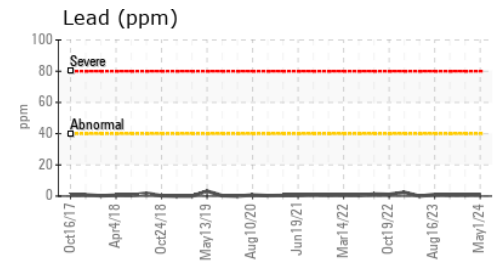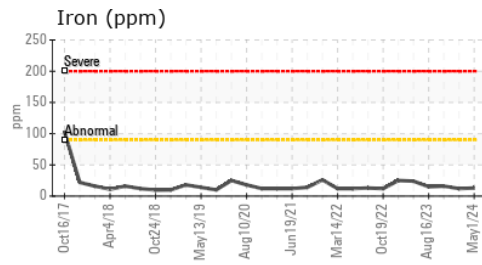

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : RW0004907      **Received** : 31 May 2024  
**Lab Number** : **06196865**      **Tested** : 03 Jun 2024  
**Unique Number** : 11058988      **Diagnosed** : 03 Jun 2024 - Wes Davis  
**Test Package** : MOB 2

**HOMER CONCRETE**  
 205 S CEDAR ST  
 IMLAY CITY, MI  
 US 48444  
 Contact: DENNIS ONDRAJKA  
 homerconcrete@aol.com  
 T: (810)724-3905  
 F: (810)724-0733

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)