




OIL ANALYSIS REPORT

Sample Rating Trend

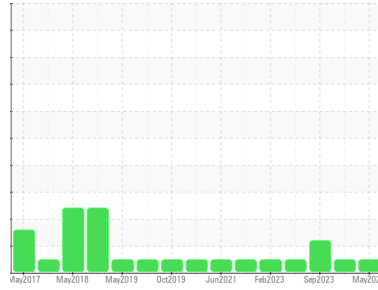

NORMAL



Machine Id
TEREX FD6000 582 (S/N 008446)
 Component
Rear Diesel Engine
 Fluid
MOBIL DELVAC 1300 SUPER15W40 (10 GAL)

DIAGNOSIS

Recommendation

Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

There is no indication of any contamination in the oil.

Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		RW0004893	RW0004902	RW0002955
Sample Date	Client Info		28 May 2024	18 Dec 2023	13 Sep 2023
Machine Age	hrs	Client Info	20000	25400	0
Oil Age	hrs	Client Info	400	410	400
Oil Changed	Client Info		Changed	Changed	Changed
Sample Status			NORMAL	NORMAL	ABNORMAL

CONTAMINATION

	method	limit/base	current	history1	history2
Fuel	WC Method	>3.0	<1.0	<1.0	<1.0
Water	WC Method	>0.2	NEG	NEG	NEG
Glycol	WC Method		NEG	NEG	NEG

WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >165	8	6	8
Chromium	ppm	ASTM D5185m >5	<1	0	<1
Nickel	ppm	ASTM D5185m >4	<1	0	<1
Titanium	ppm	ASTM D5185m >2	<1	0	0
Silver	ppm	ASTM D5185m >2	<1	0	<1
Aluminum	ppm	ASTM D5185m >20	1	1	1
Lead	ppm	ASTM D5185m >150	1	<1	<1
Copper	ppm	ASTM D5185m >90	1	0	<1
Tin	ppm	ASTM D5185m >5	1	0	<1
Vanadium	ppm	ASTM D5185m	<1	0	0
Cadmium	ppm	ASTM D5185m	<1	0	<1

ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m 0	65	61	50
Barium	ppm	ASTM D5185m 0	2	0	4
Molybdenum	ppm	ASTM D5185m 0	42	43	44
Manganese	ppm	ASTM D5185m	<1	<1	<1
Magnesium	ppm	ASTM D5185m 0	510	574	483
Calcium	ppm	ASTM D5185m	1707	1973	1614
Phosphorus	ppm	ASTM D5185m	852	888	743
Zinc	ppm	ASTM D5185m	945	1052	875
Sulfur	ppm	ASTM D5185m	2736	3371	2632

CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >35	5	5	5
Sodium	ppm	ASTM D5185m	2	2	0
Potassium	ppm	ASTM D5185m >20	2	<1	<1

INFRA-RED

	method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844 >7.5	1	1	1.5
Nitration	Abs/cm	*ASTM D7624 >20	6.3	6.4	7.1
Sulfation	Abs/.1mm	*ASTM D7415 >30	22.5	22.8	23.7


FLUID DEGRADATION

	method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	*ASTM D7414 >25	18.8	19.6	19.6
Base Number (BN)	mg KOH/g	ASTM D2896 9.4	8.28	9.24	▲ 1.21




OIL ANALYSIS REPORT


FT-IR (Direct Trend)

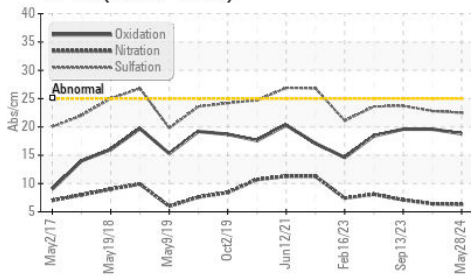

Base Number

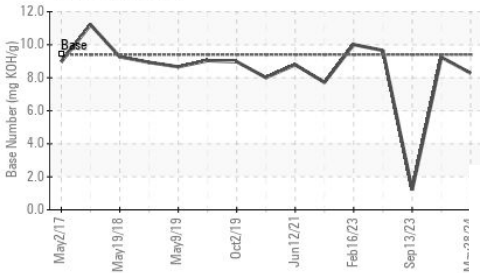

Viscosity @ 100°C

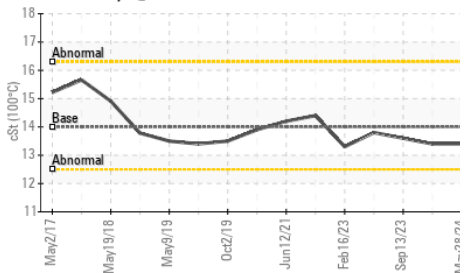


VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG


FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D445 14	13.4	13.4	13.6

GRAPHS


Iron (ppm)

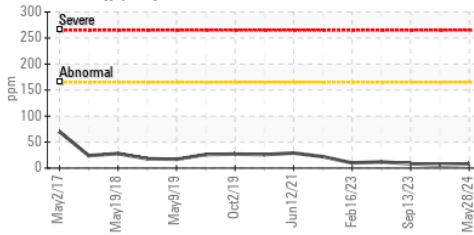


Lead (ppm)

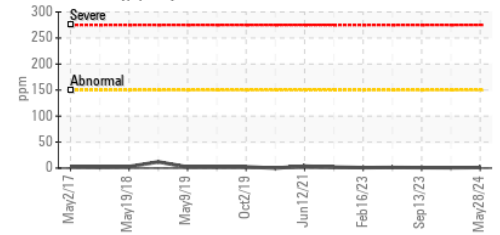


Aluminum (ppm)

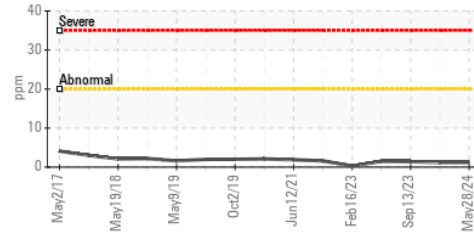


Chromium (ppm)

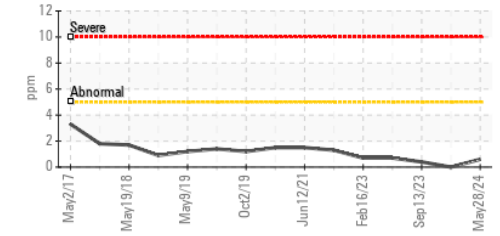


Copper (ppm)

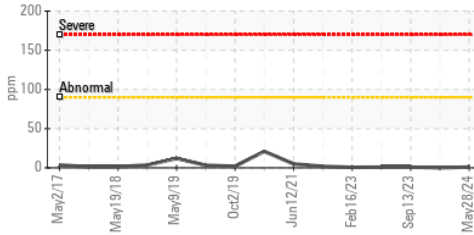


Silicon (ppm)

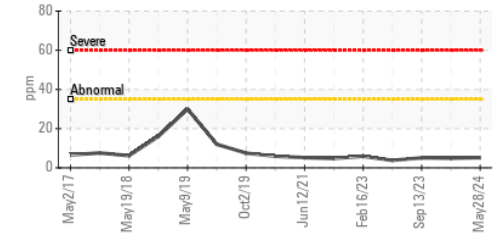

Viscosity @ 100°C

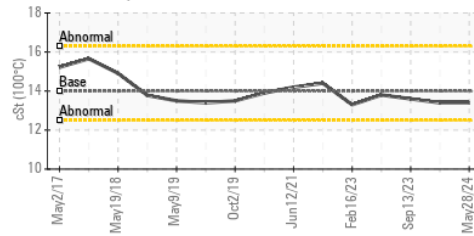

Base Number

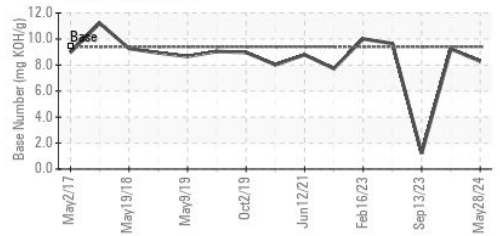

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513

Sample No. : RW0004893

Lab Number : 06196867

Unique Number : 11058990

Test Package : MOB 2

Received : 31 May 2024

Tested : 03 Jun 2024

Diagnosed : 03 Jun 2024 - Wes Davis

HOMER CONCRETE

205 S CEDAR ST

IMLAY CITY, MI

US 48444

Contact: DENNIS ONDRAJKA

homerconcrete@aol.com

T: (810)724-3905

F: (810)724-0733

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)