


OIL ANALYSIS REPORT

Sample Rating Trend



NORMAL

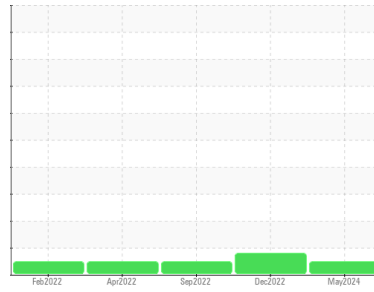

Machine Id
JOHN DEERE 117
Component
Rear Differential
Fluid
MOBIL MOBILFLUID 424 (--- QTS)

DIAGNOSIS

Recommendation

Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

There is no indication of any contamination in the oil.

Fluid Condition

The condition of the oil is acceptable for the time in service.

| SAMPLE INFORMATION | | method | limit/base | current | history1 | history2 |
|--------------------|-------------|-------------|------------|--------------------|-------------|-------------|
| Sample Number | Client Info | | | JR0172400 | JR0117805 | JR0039644 |
| Sample Date | Client Info | | | 17 May 2024 | 07 Dec 2022 | 27 Sep 2022 |
| Machine Age | hrs | Client Info | | 7263 | 3768 | 3209 |
| Oil Age | hrs | Client Info | | 1263 | 1768 | 500 |
| Oil Changed | Client Info | | | Not Chngd | Not Chngd | Not Chngd |
| Sample Status | | | | NORMAL | ABNORMAL | NORMAL |

| CONTAMINATION | | method | limit/base | current | history1 | history2 |
|---------------|-----------|--------|------------|------------|----------|----------|
| Water | WC Method | | >.2 | NEG | NEG | NEG |



| WEAR METALS | | method | limit/base | current | history1 | history2 |
|-------------|-----|-------------|------------|--------------|----------|----------|
| PQ | | ASTM D8184 | | 22 | 7 | 11 |
| Iron | ppm | ASTM D5185m | >500 | 60 | 7 | 50 |
| Chromium | ppm | ASTM D5185m | >10 | <1 | ▲ 10 | <1 |
| Nickel | ppm | ASTM D5185m | >10 | 0 | 0 | 0 |
| Titanium | ppm | ASTM D5185m | | <1 | 0 | 0 |
| Silver | ppm | ASTM D5185m | | 0 | 0 | 0 |
| Aluminum | ppm | ASTM D5185m | >25 | <1 | 0 | 1 |
| Lead | ppm | ASTM D5185m | >25 | 26 | <1 | 21 |
| Copper | ppm | ASTM D5185m | >100 | 217 | 4 | 54 |
| Tin | ppm | ASTM D5185m | >10 | 5 | 0 | <1 |
| Vanadium | ppm | ASTM D5185m | | 0 | 0 | 0 |
| Cadmium | ppm | ASTM D5185m | | 0 | 0 | 0 |

| ADDITIVES | | method | limit/base | current | history1 | history2 |
|------------|-----|-------------|------------|-------------|----------|----------|
| Boron | ppm | ASTM D5185m | | 116 | 7 | 0 |
| Barium | ppm | ASTM D5185m | | 0 | 0 | 0 |
| Molybdenum | ppm | ASTM D5185m | | 8 | <1 | <1 |
| Manganese | ppm | ASTM D5185m | | 1 | 0 | 1 |
| Magnesium | ppm | ASTM D5185m | | 94 | 7 | 93 |
| Calcium | ppm | ASTM D5185m | | 3492 | 371 | 3296 |
| Phosphorus | ppm | ASTM D5185m | | 1217 | 687 | 978 |
| Zinc | ppm | ASTM D5185m | | 1192 | 900 | 1137 |
| Sulfur | ppm | ASTM D5185m | | 7843 | 2621 | 4079 |

| CONTAMINANTS | | method | limit/base | current | history1 | history2 |
|--------------|-----|-------------|------------|-----------|----------|----------|
| Silicon | ppm | ASTM D5185m | >75 | 18 | 3 | 6 |
| Sodium | ppm | ASTM D5185m | | 4 | 2 | 2 |
| Potassium | ppm | ASTM D5185m | >20 | 0 | 2 | 0 |

| VISUAL | | method | limit/base | current | history1 | history2 |
|------------------|--------|---------|------------|--------------|----------|----------|
| White Metal | scalar | *Visual | NONE | NONE | NONE | NONE |
| Yellow Metal | scalar | *Visual | NONE | NONE | NONE | NONE |
| Precipitate | scalar | *Visual | NONE | NONE | NONE | NONE |
| Silt | scalar | *Visual | NONE | NONE | NONE | NONE |
| Debris | scalar | *Visual | NONE | NONE | NONE | NONE |
| Sand/Dirt | scalar | *Visual | NONE | NONE | NONE | NONE |
| Appearance | scalar | *Visual | NORML | NORML | NORML | NORML |
| Odor | scalar | *Visual | NORML | NORML | NORML | NORML |
| Emulsified Water | scalar | *Visual | >.2 | NEG | NEG | NEG |
| Free Water | scalar | *Visual | | NEG | NEG | NEG |

OIL ANALYSIS REPORT

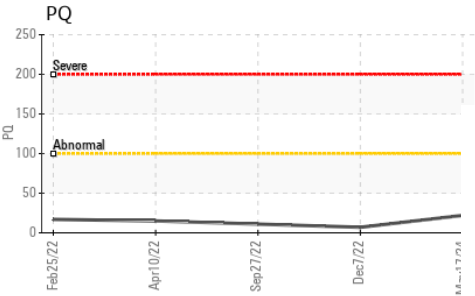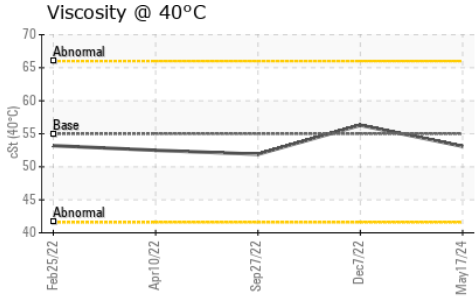





| FLUID PROPERTIES | method | limit/base | current | history1 | history2 |
|------------------|--------|------------|---------|----------|----------|
|------------------|--------|------------|---------|----------|----------|

| | | | | | | |
|-------------|-----|-----------|----|-------------|------|------|
| Visc @ 40°C | cSt | ASTM D445 | 55 | 53.1 | 56.3 | 51.9 |
|-------------|-----|-----------|----|-------------|------|------|

| SAMPLE IMAGES | method | limit/base | current | history1 | history2 |
|---------------|--------|------------|---------|----------|----------|
|---------------|--------|------------|---------|----------|----------|

| | | | | | | |
|--------|--|--|--|----------|----------|----------|
| Color | | | | no image | no image | no image |
| Bottom | | | | no image | no image | no image |

| GRAPHS |
|--------|
|--------|

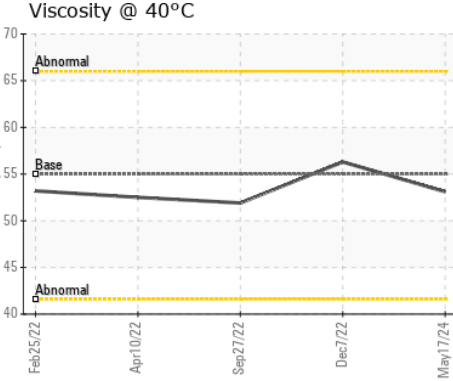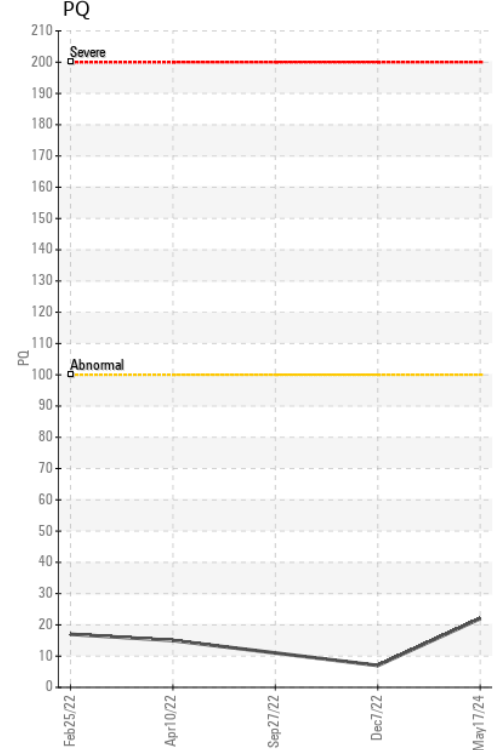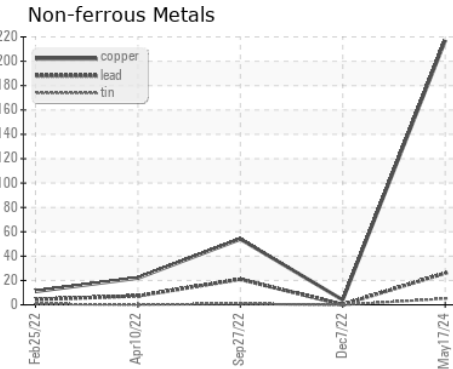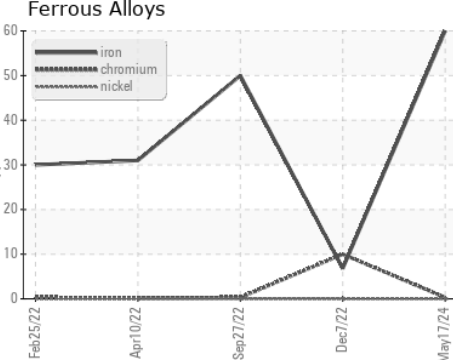

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : JR0172400 **Received** : 31 May 2024
Lab Number : **06197039** **Tested** : 03 Jun 2024
Unique Number : 11059162 **Diagnosed** : 04 Jun 2024 - Don Baldrige
Test Package : CONST (Additional Tests: PQ)

SCOTTS EARTH GROW
 7601 GENERAL MAHONE HWY
 WAVERLY, VA
 US 23890
 Contact: JW
 jerald.tappiii@scotts.com
 T: (804)834-3986
 F: (804)834-3989

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)