


# **OIL ANALYSIS REPORT**

Sample Rating Trend

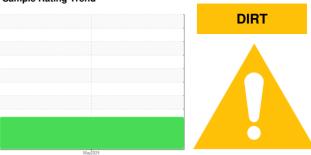

Machine Id

# **KENWORTH 3042**

Front Differential

**GEAR OIL SAE 80 (--- GAL)** 

#### **DIAGNOSIS**

#### Recommendation

We advise that you check all areas where dirt can enter the system. Resample at the next service interval to monitor.

### Wear

Gear wear is indicated.

### Contamination

Elemental level of silicon (Si) above normal indicating ingress of dirt/seal material.


#### **Fluid Condition**

The condition of the oil is acceptable for the time in service.

				May2024		
SAMPLE INFORM	MATION	method	limit/base	current	history1	history2
Sample Number		Client Info		WCMFB57006		
Sample Date		Client Info		30 May 2024		
Machine Age	mls	Client Info		0		
Oil Age	mls	Client Info		0		
Oil Changed		Client Info		N/A		
Sample Status				ABNORMAL		
CONTAMINATIO	N	method	limit/base	current	history1	history2
Water		WC Method	>.2	NEG		
WEAR METALS		method	limit/base	current	history1	history2
ron	ppm	ASTM D5185m	>500	<b>△</b> 596		
Chromium	ppm	ASTM D5185m	>10	4		
Nickel	ppm	ASTM D5185m	>10	<1		
Titanium	ppm	ASTM D5185m		0		
Silver	ppm	ASTM D5185m		0		
Aluminum	ppm	ASTM D5185m	>25	3		
Lead	ppm	ASTM D5185m	>25	6		
Copper	ppm	ASTM D5185m	>100	50		
Tin	ppm	ASTM D5185m	>100	6		
√anadium	ppm	ASTM D5185m	>10	0		
Cadmium	ppm	ASTM D5185m		0		
	ррпп					
ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	400	222		
Barium	ppm	ASTM D5185m	200	8		
Molybdenum	ppm	ASTM D5185m	12	0		
Manganese	ppm	ASTM D5185m		16		
Magnesium	ppm	ASTM D5185m	12	3		
Calcium	ppm	ASTM D5185m	150	28		
Phosphorus	ppm	ASTM D5185m	1650	1382		
Zinc	ppm	ASTM D5185m	125	23		
Sulfur	ppm	ASTM D5185m	22500	25801		
CONTAMINANTS	3	method	limit/base	current	history1	history2
Silicon						
	ppm	ASTM D5185m	>75	<b>152</b>		
Sodium	ppm		>/5	▲ 152 14		
Sodium Potassium	ppm ppm	ASTM D5185m ASTM D5185m ASTM D5185m	>/5			
Potassium	ppm	ASTM D5185m		14 2		
Potassium VISUAL	ppm ppm	ASTM D5185m ASTM D5185m	>20	14		
Potassium  VISUAL  White Metal	ppm ppm	ASTM D5185m ASTM D5185m method	>20 limit/base NONE	14 2 current NONE	 history1	 history2
Potassium  VISUAL  White Metal  Yellow Metal	ppm ppm scalar scalar	ASTM D5185m ASTM D5185m method *Visual	>20 limit/base NONE NONE	14 2 current NONE NONE	 history1	history2
Potassium  VISUAL  White Metal  Yellow Metal  Precipitate	ppm ppm scalar scalar scalar	ASTM D5185m ASTM D5185m method *Visual *Visual *Visual	>20 limit/base NONE NONE NONE	14 2 current NONE NONE NONE	 history1 	history2
Potassium  VISUAL  White Metal  Yellow Metal  Precipitate  Silt	ppm ppm scalar scalar scalar scalar	ASTM D5185m ASTM D5185m method *Visual *Visual *Visual *Visual	>20 limit/base NONE NONE NONE NONE	14 2 current NONE NONE NONE LIGHT	 history1	history2
Potassium  VISUAL  White Metal  Yellow Metal  Precipitate  Silt  Debris	ppm ppm scalar scalar scalar scalar	ASTM D5185m ASTM D5185m method  *Visual *Visual *Visual *Visual *Visual *Visual	>20 limit/base NONE NONE NONE NONE NONE NONE	current NONE NONE NONE LIGHT NONE	 history1  	history2
Potassium  VISUAL  White Metal  Yellow Metal  Precipitate  Silt  Debris  Sand/Dirt	scalar scalar scalar scalar scalar scalar	ASTM D5185m ASTM D5185m method *Visual *Visual *Visual *Visual *Visual *Visual *Visual *Visual	>20 limit/base NONE NONE NONE NONE NONE NONE NONE	current NONE NONE NONE LIGHT NONE NONE	history1	history2
Potassium  VISUAL  White Metal  Yellow Metal  Precipitate  Silt  Debris  Sand/Dirt  Appearance	scalar scalar scalar scalar scalar scalar scalar	ASTM D5185m ASTM D5185m method *Visual	>20 limit/base NONE NONE NONE NONE NONE NONE NONE NON	current NONE NONE NONE LIGHT NONE NONE NONE NONE NONE	history1	history2
Potassium  VISUAL  White Metal  Yellow Metal  Precipitate  Silt  Debris  Sand/Dirt  Appearance  Odor	scalar scalar scalar scalar scalar scalar scalar scalar	ASTM D5185m ASTM D5185m method *Visual	>20 limit/base NONE NONE NONE NONE NONE NONE NONE NON	current NONE NONE NONE LIGHT NONE NONE NONE NONE NONE NONE	history1	history2
Potassium  VISUAL  White Metal  Yellow Metal  Precipitate	scalar scalar scalar scalar scalar scalar scalar	ASTM D5185m ASTM D5185m method *Visual	>20 limit/base NONE NONE NONE NONE NONE NONE NONE NON	current NONE NONE NONE LIGHT NONE NONE NONE NONE NONE	history1	history2



## **OIL ANALYSIS REPORT**

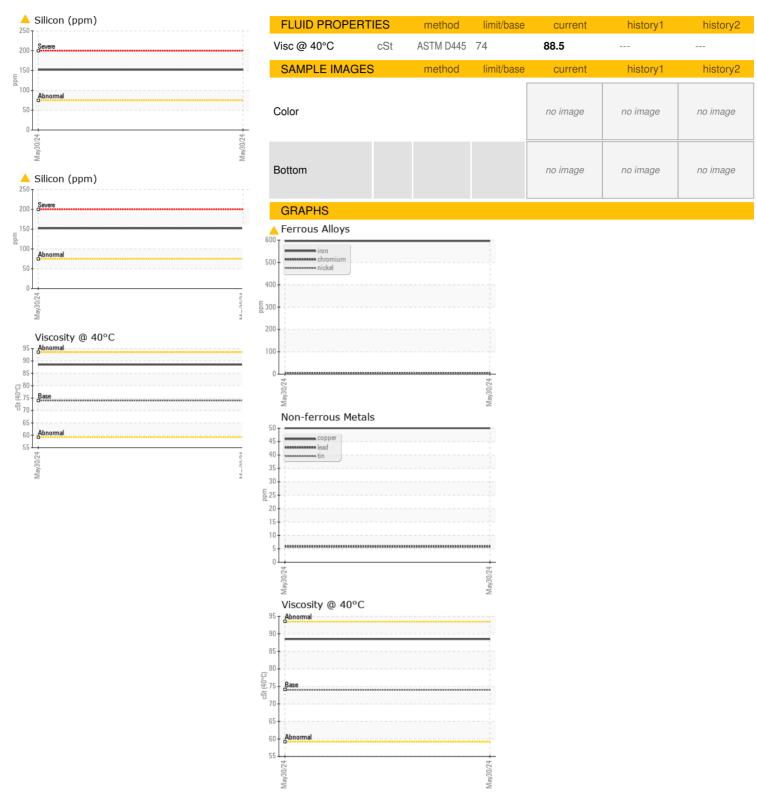





Certificate 12367

Laboratory Sample No.

Test Package : FLEET

Lab Number : 06197069

: WearCheck USA - 501 Madison Ave., Cary, NC 27513 : WCMFB57006 Unique Number : 11059192

Received **Tested** Diagnosed

: 31 May 2024 : 03 Jun 2024

: 04 Jun 2024 - Don Baldridge

LTI/MILKY WAY - JEROME P.O. BOX 348 JEROME, ID US 83338

Contact/Location: Cesar ESPINO - LTIJER

Contact: Cesar ESPINO cespino@lynden.com T: (208)731-3822

To discuss this sample report, contact Customer Service at 1-800-237-1369. \* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012) F: (208)324-1176

Report Id: LTIJER [WUSCAR] 06197069 (Generated: 06/04/2024 23:36:04) Rev: 1