




OIL ANALYSIS REPORT



Area
[146479]
 Machine Id
LINK-BELT TCC-800 U1L2-7108
 Component
Rear Winch
 Fluid
GEAR OIL ISO 150 (--- GAL)

Sample Rating Trend

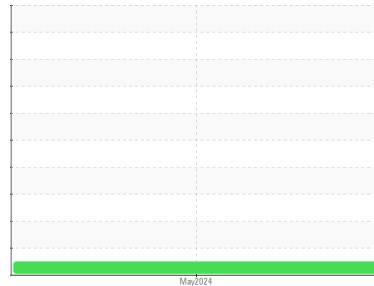

NORMAL



DIAGNOSIS

Recommendation

Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

There is no indication of any contamination in the oil.

Fluid Condition

The condition of the oil is acceptable for the time in service.

SAMPLE INFORMATION

| | method | limit/base | current | history1 | history2 |
|---------------|-------------|-------------|--------------------|----------|----------|
| Sample Number | Client Info | | LBC0000105 | --- | --- |
| Sample Date | Client Info | | 28 May 2024 | --- | --- |
| Machine Age | hrs | Client Info | 297 | --- | --- |
| Oil Age | hrs | Client Info | 0 | --- | --- |
| Oil Changed | Client Info | | Not Chngd | --- | --- |
| Sample Status | | | NORMAL | --- | --- |

CONTAMINATION

| | method | limit/base | current | history1 | history2 |
|-------|-----------|------------|------------|----------|----------|
| Water | WC Method | >0.2 | NEG | --- | --- |

WEAR METALS

| | method | limit/base | current | history1 | history2 |
|----------|--------|------------------|--------------|----------|----------|
| Iron | ppm | ASTM D5185m >150 | 7 | --- | --- |
| Chromium | ppm | ASTM D5185m >10 | 0 | --- | --- |
| Nickel | ppm | ASTM D5185m >10 | 0 | --- | --- |
| Titanium | ppm | ASTM D5185m | 0 | --- | --- |
| Silver | ppm | ASTM D5185m | 0 | --- | --- |
| Aluminum | ppm | ASTM D5185m >5 | 0 | --- | --- |
| Lead | ppm | ASTM D5185m >15 | 0 | --- | --- |
| Copper | ppm | ASTM D5185m >80 | 4 | --- | --- |
| Tin | ppm | ASTM D5185m | 0 | --- | --- |
| Vanadium | ppm | ASTM D5185m | 0 | --- | --- |
| Cadmium | ppm | ASTM D5185m | <1 | --- | --- |

ADDITIVES

| | method | limit/base | current | history1 | history2 |
|------------|--------|-------------------|--------------|----------|----------|
| Boron | ppm | ASTM D5185m 50 | 138 | --- | --- |
| Barium | ppm | ASTM D5185m 15 | 15 | --- | --- |
| Molybdenum | ppm | ASTM D5185m 15 | 0 | --- | --- |
| Manganese | ppm | ASTM D5185m | <1 | --- | --- |
| Magnesium | ppm | ASTM D5185m 50 | <1 | --- | --- |
| Calcium | ppm | ASTM D5185m 50 | 2 | --- | --- |
| Phosphorus | ppm | ASTM D5185m 350 | 504 | --- | --- |
| Zinc | ppm | ASTM D5185m 100 | 0 | --- | --- |
| Sulfur | ppm | ASTM D5185m 12500 | 10684 | --- | --- |


CONTAMINANTS

| | method | limit/base | current | history1 | history2 |
|-----------|--------|-----------------|--------------|----------|----------|
| Silicon | ppm | ASTM D5185m >25 | 5 | --- | --- |
| Sodium | ppm | ASTM D5185m | 3 | --- | --- |
| Potassium | ppm | ASTM D5185m >20 | <1 | --- | --- |

VISUAL

| | method | limit/base | current | history1 | history2 |
|------------------|--------|---------------|--------------|----------|----------|
| White Metal | scalar | *Visual NONE | NONE | --- | --- |
| Yellow Metal | scalar | *Visual NONE | NONE | --- | --- |
| Precipitate | scalar | *Visual NONE | NONE | --- | --- |
| Silt | scalar | *Visual NONE | NONE | --- | --- |
| Debris | scalar | *Visual NONE | NONE | --- | --- |
| Sand/Dirt | scalar | *Visual NONE | NONE | --- | --- |
| Appearance | scalar | *Visual NORML | NORML | --- | --- |
| Odor | scalar | *Visual NORML | NORML | --- | --- |
| Emulsified Water | scalar | *Visual >0.2 | NEG | --- | --- |
| Free Water | scalar | *Visual | NEG | --- | --- |

OIL ANALYSIS REPORT

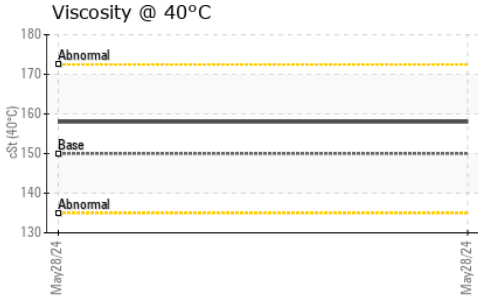




| FLUID PROPERTIES | method | limit/base | current | history1 | history2 |
|------------------|--------|------------|---------|----------|----------|
|------------------|--------|------------|---------|----------|----------|

| | | | | | | |
|-------------|-----|-----------|-----|-----|-----|-----|
| Visc @ 40°C | cSt | ASTM D445 | 150 | 158 | --- | --- |
|-------------|-----|-----------|-----|-----|-----|-----|

| SAMPLE IMAGES | method | limit/base | current | history1 | history2 |
|---------------|--------|------------|---------|----------|----------|
|---------------|--------|------------|---------|----------|----------|

| | | | | | | |
|--------|--|--|--|----------|----------|----------|
| Color | | | | no image | no image | no image |
| Bottom | | | | no image | no image | no image |

| GRAPHS |
|--------|
|--------|

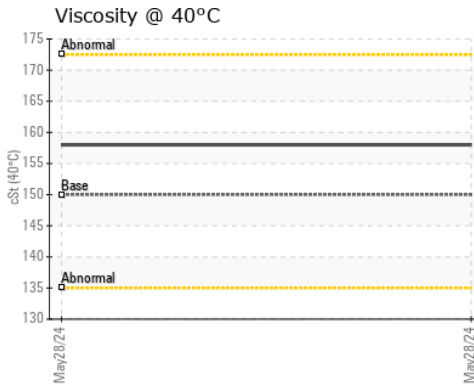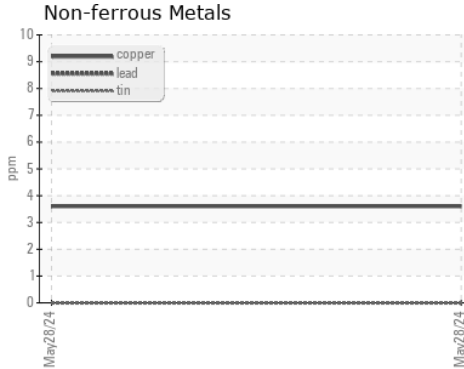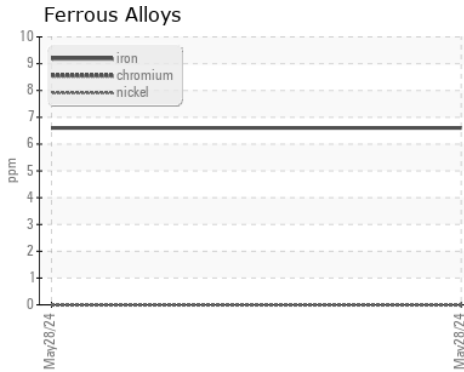

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : LBC0000105
Lab Number : 06197091
Unique Number : 11059214
Test Package : CONST

Received : 31 May 2024
Tested : 03 Jun 2024
Diagnosed : 04 Jun 2024 - Don Baldrige

Columbus Equipment Co. - P103900
 2329 Performance Way
 Columbus, OH
 US 43207
 Contact: JASON LANG
 jasonl@columbusequipment.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:
F: