




# OIL ANALYSIS REPORT

Sample Rating Trend

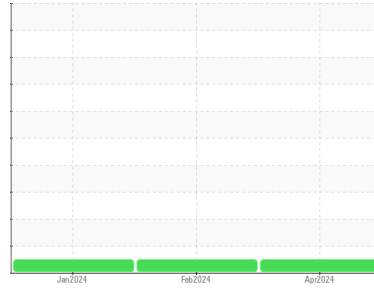

**NORMAL**



Machine Id  
**FREIGHTLINER 2123**  
 Component  
**Diesel Engine**  
 Fluid  
 **DIESEL ENGINE OIL SAE 15W40 (--- GAL)**

## DIAGNOSIS

### Recommendation

Resample at the next service interval to monitor.

### Wear

All component wear rates are normal.

### Contamination

There is no indication of any contamination in the oil.

### Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

SAMPLE INFORMATION		method	limit/base	current	history1	history2
Sample Number	Client Info			<b>WC0909282</b>	WC0906274	WC0878833
Sample Date	Client Info			<b>29 Apr 2024</b>	19 Feb 2024	03 Jan 2024
Machine Age	mls	Client Info		<b>0</b>	368732	360360
Oil Age	mls	Client Info		<b>0</b>	0	0
Oil Changed	Client Info			<b>Changed</b>	Changed	Changed
Sample Status				<b>NORMAL</b>	NORMAL	NORMAL

CONTAMINATION		method	limit/base	current	history1	history2
Fuel	WC Method	>5		<b>&lt;1.0</b>	<1.0	<1.0
Water	WC Method	>0.2		<b>NEG</b>	NEG	NEG
Glycol	WC Method			<b>NEG</b>	NEG	NEG

WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>80	<b>20</b>	13	14
Chromium	ppm	ASTM D5185m	>5	<b>2</b>	1	1
Nickel	ppm	ASTM D5185m	>2	<b>0</b>	0	0
Titanium	ppm	ASTM D5185m		<b>0</b>	0	<1
Silver	ppm	ASTM D5185m	>3	<b>0</b>	0	0
Aluminum	ppm	ASTM D5185m	>30	<b>&lt;1</b>	<1	<1
Lead	ppm	ASTM D5185m	>30	<b>13</b>	3	4
Copper	ppm	ASTM D5185m	>150	<b>1</b>	<1	<1
Tin	ppm	ASTM D5185m	>5	<b>0</b>	<1	2
Vanadium	ppm	ASTM D5185m		<b>0</b>	<1	<1
Cadmium	ppm	ASTM D5185m		<b>0</b>	0	<1

ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	250	<b>0</b>	2	3
Barium	ppm	ASTM D5185m	10	<b>0</b>	0	0
Molybdenum	ppm	ASTM D5185m	100	<b>60</b>	55	54
Manganese	ppm	ASTM D5185m		<b>&lt;1</b>	0	<1
Magnesium	ppm	ASTM D5185m	450	<b>988</b>	873	961
Calcium	ppm	ASTM D5185m	3000	<b>1127</b>	1027	1037
Phosphorus	ppm	ASTM D5185m	1150	<b>1078</b>	910	1010
Zinc	ppm	ASTM D5185m	1350	<b>1293</b>	1079	1171
Sulfur	ppm	ASTM D5185m	4250	<b>3514</b>	3192	2926

CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>20	<b>0</b>	2	3
Sodium	ppm	ASTM D5185m	>158	<b>2</b>	3	1
Potassium	ppm	ASTM D5185m	>20	<b>0</b>	0	<1


INFRA-RED		method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844	>3	<b>1.7</b>	0.8	0.8
Nitration	Abs/cm	*ASTM D7624	>20	<b>9.7</b>	7.9	7.9
Sulfation	Abs/.1mm	*ASTM D7415	>30	<b>22.1</b>	19.5	19.9

FLUID DEGRADATION		method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	*ASTM D7414	>25	<b>16.3</b>	15.1	15.1
Base Number (BN)	mg KOH/g	ASTM D2896	8.5	<b>7.6</b>	8.1	8.3




# OIL ANALYSIS REPORT


FT-IR (Direct Trend)

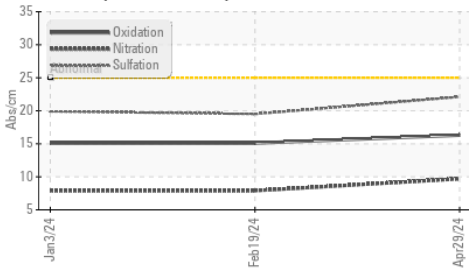

Base Number

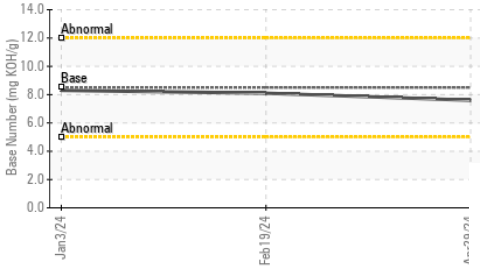


Viscosity @ 100°C

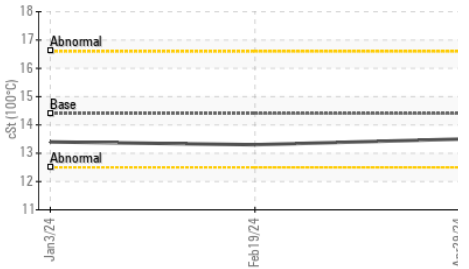

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D445	14.4	13.5	13.3

## GRAPHS

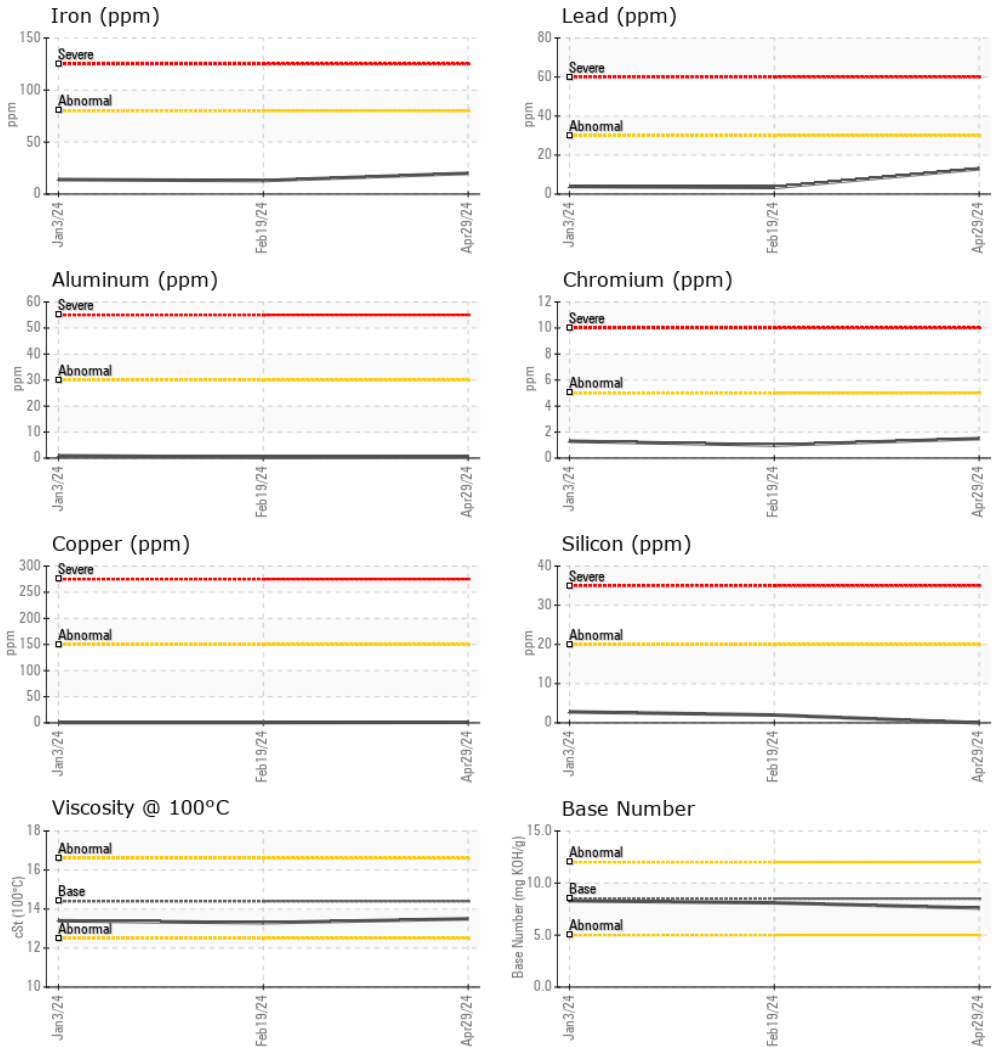

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513

Sample No. : WC0909282

Lab Number : 06197255

Unique Number : 11059378

Test Package : MOB 1 ( Additional Tests: TBN )

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

Received : 03 Jun 2024

Tested : 03 Jun 2024

Diagnosed : 03 Jun 2024 - Wes Davis

CONCRETE SERVICE CO - FAY BLOCK

161 BUILDERS BLVD

FAYETTEVILLE, NC

US 28301

Contact: BRYAN VANNIMAN

bryanvanniman@fayblock.com

T: (800)326-9198

F: