




# OIL ANALYSIS REPORT

Sample Rating Trend

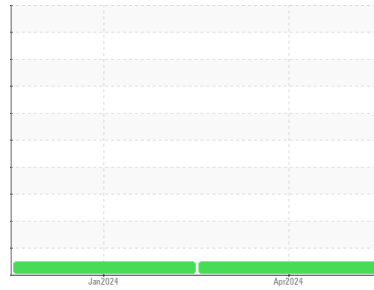

**NORMAL**



Machine Id  
**OSHKOSH 4382**

Component  
**Diesel Engine**

Fluid  
**DIESEL ENGINE OIL SAE 15W40 (--- GAL)**

## DIAGNOSIS

### Recommendation

Resample at the next service interval to monitor.

### Wear

Metal levels are typical for a new component breaking in.

### Contamination

There is no indication of any contamination in the oil.

### Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

## SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		<b>WC0909278</b>	WC0893856	---
Sample Date	Client Info		<b>30 Apr 2024</b>	25 Jan 2024	---
Machine Age	mls	Client Info	<b>62591</b>	58545	---
Oil Age	mls	Client Info	<b>0</b>	0	---
Oil Changed	Client Info		<b>Changed</b>	Changed	---
Sample Status			<b>NORMAL</b>	NORMAL	---

## CONTAMINATION

	method	limit/base	current	history1	history2
Fuel	WC Method	>5	<b>&lt;1.0</b>	<1.0	---
Water	WC Method	>0.2	<b>NEG</b>	NEG	---
Glycol	WC Method		<b>NEG</b>	NEG	---

## WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >100	<b>0</b>	1	---
Chromium	ppm	ASTM D5185m >20	<b>0</b>	<1	---
Nickel	ppm	ASTM D5185m >4	<b>0</b>	0	---
Titanium	ppm	ASTM D5185m	<b>0</b>	0	---
Silver	ppm	ASTM D5185m >3	<b>0</b>	0	---
Aluminum	ppm	ASTM D5185m >20	<b>&lt;1</b>	<1	---
Lead	ppm	ASTM D5185m >40	<b>0</b>	0	---
Copper	ppm	ASTM D5185m >330	<b>0</b>	0	---
Tin	ppm	ASTM D5185m >15	<b>0</b>	0	---
Vanadium	ppm	ASTM D5185m	<b>0</b>	0	---
Cadmium	ppm	ASTM D5185m	<b>0</b>	0	---

## ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m 250	<b>0</b>	4	---
Barium	ppm	ASTM D5185m 10	<b>0</b>	0	---
Molybdenum	ppm	ASTM D5185m 100	<b>56</b>	58	---
Manganese	ppm	ASTM D5185m	<b>0</b>	<1	---
Magnesium	ppm	ASTM D5185m 450	<b>943</b>	923	---
Calcium	ppm	ASTM D5185m 3000	<b>1072</b>	1052	---
Phosphorus	ppm	ASTM D5185m 1150	<b>1045</b>	1046	---
Zinc	ppm	ASTM D5185m 1350	<b>1231</b>	1231	---
Sulfur	ppm	ASTM D5185m 4250	<b>3555</b>	2959	---

## CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >25	<b>0</b>	2	---
Sodium	ppm	ASTM D5185m >158	<b>1</b>	2	---
Potassium	ppm	ASTM D5185m >20	<b>0</b>	0	---

## INFRA-RED




	method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844 >3	<b>0.3</b>	0.3	---
Nitration	Abs/cm	*ASTM D7624 >20	<b>6.8</b>	6.5	---
Sulfation	Abs/.1mm	*ASTM D7415 >30	<b>18.4</b>	18.2	---

## FLUID DEGRADATION

	method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	*ASTM D7414 >25	<b>14.0</b>	13.9	---
Base Number (BN)	mg KOH/g	ASTM D2896 8.5	<b>8.5</b>	8.7	---











# OIL ANALYSIS REPORT

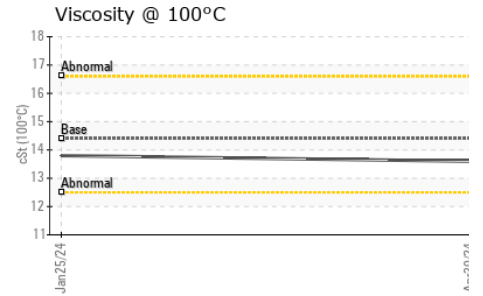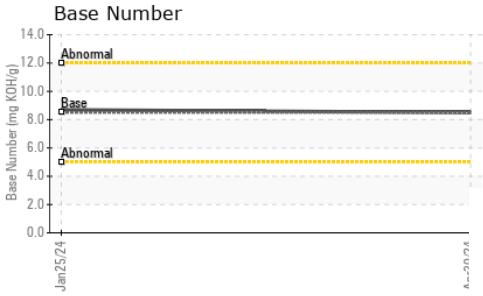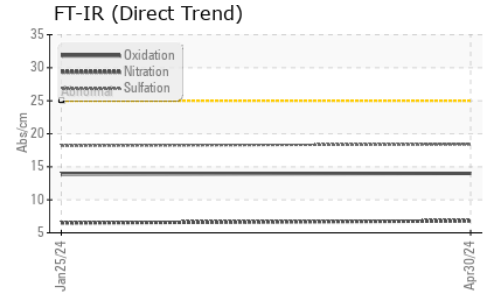

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	---
Yellow Metal	scalar	*Visual	NONE	NONE	---
Precipitate	scalar	*Visual	NONE	NONE	---
Silt	scalar	*Visual	NONE	NONE	---
Debris	scalar	*Visual	NONE	NONE	---
Sand/Dirt	scalar	*Visual	NONE	NONE	---
Appearance	scalar	*Visual	NORML	NORML	---
Odor	scalar	*Visual	NORML	NORML	---
Emulsified Water	scalar	*Visual	>0.2	NEG	---
Free Water	scalar	*Visual		NEG	---

FLUID PROPERTIES	method	limit/base	current	history1	history2	
Visc @ 100°C	cSt	ASTM D445	14.4	<b>13.6</b>	13.8	---

### GRAPHS

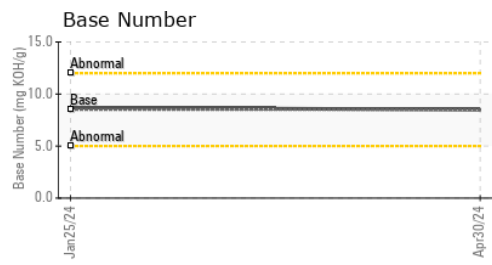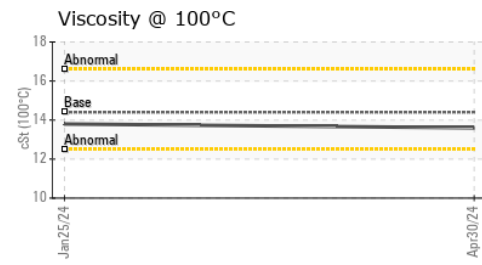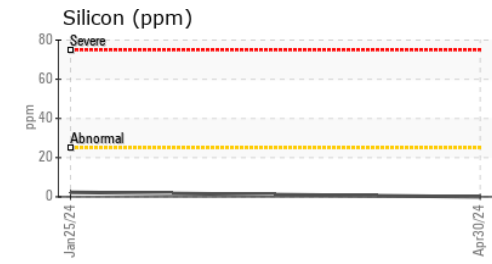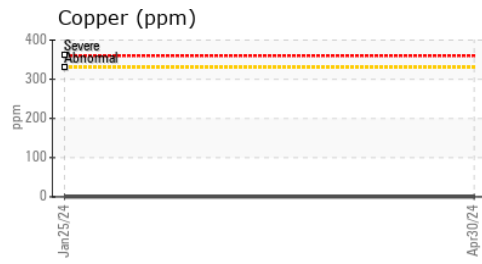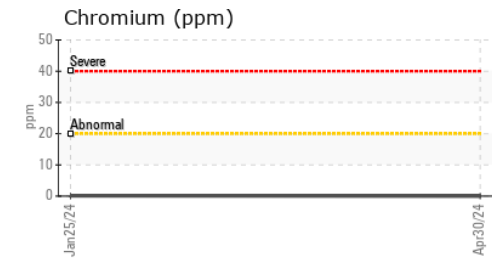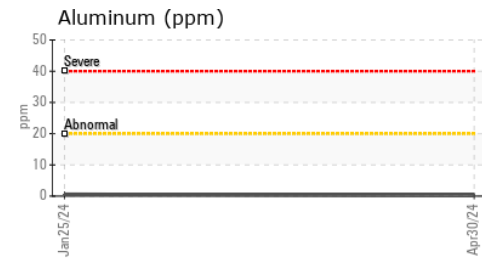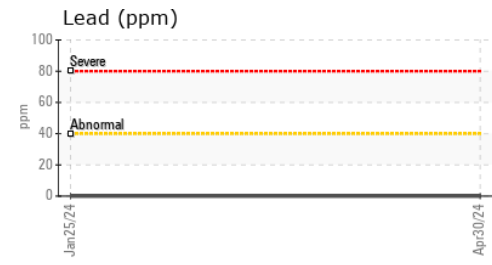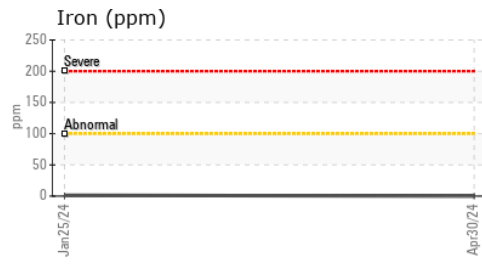

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : WC0909278      **Received** : 03 Jun 2024  
**Lab Number** : **06197264**      **Tested** : 03 Jun 2024  
**Unique Number** : 11059387      **Diagnosed** : 03 Jun 2024 - Wes Davis  
**Test Package** : MOB 1 ( Additional Tests: TBN )

**CONCRETE SERVICE CO - FAY BLOCK**  
 161 BUILDERS BLVD  
 FAYETTEVILLE, NC  
 US 28301  
 Contact: BRYAN VANNIMAN  
 bryanvanniman@fayblock.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.  
 \* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.  
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)