




OIL ANALYSIS REPORT

Sample Rating Trend

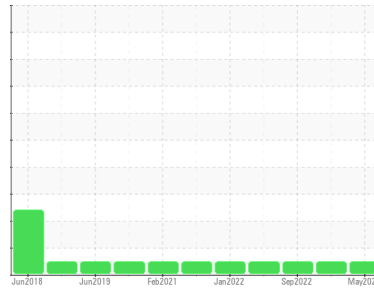

NORMAL



Machine Id
KENWORTH T800 DUMP CD8 (S/N 1NKDX4TX1NJ336428)
 Component
Diesel Engine
 Fluid
CHEVRON DELO 400 MULTIGRADE 15W40 (9 QTS)

DIAGNOSIS

Recommendation

Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

There is no indication of any contamination in the oil.

Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		WC0889914	WC0791715	WC0660142
Sample Date	Client Info		09 May 2024	25 Sep 2023	26 Sep 2022
Machine Age	mls	Client Info	301890	293428	28062
Oil Age	mls	Client Info	0	0	0
Oil Changed	Client Info		Changed	Changed	Changed
Sample Status			NORMAL	NORMAL	NORMAL

CONTAMINATION

	method	limit/base	current	history1	history2
Fuel	WC Method	>5	<1.0	<1.0	<1.0
Water	WC Method	>0.2	NEG	NEG	NEG
Glycol	WC Method		NEG	NEG	NEG

WEAR METALS

	method	limit/base	current	history1	history2	
Iron	ppm	ASTM D5185m	>100	17	8	20
Chromium	ppm	ASTM D5185m	>20	<1	<1	<1
Nickel	ppm	ASTM D5185m	>4	<1	0	0
Titanium	ppm	ASTM D5185m		<1	<1	<1
Silver	ppm	ASTM D5185m	>3	0	0	0
Aluminum	ppm	ASTM D5185m	>20	2	0	2
Lead	ppm	ASTM D5185m	>40	2	<1	2
Copper	ppm	ASTM D5185m	>330	4	<1	<1
Tin	ppm	ASTM D5185m	>15	<1	<1	<1
Vanadium	ppm	ASTM D5185m		<1	<1	0
Cadmium	ppm	ASTM D5185m		<1	0	0

ADDITIVES

	method	limit/base	current	history1	history2	
Boron	ppm	ASTM D5185m		44	70	31
Barium	ppm	ASTM D5185m		0	0	0
Molybdenum	ppm	ASTM D5185m		8	2	2
Manganese	ppm	ASTM D5185m		<1	<1	<1
Magnesium	ppm	ASTM D5185m		694	716	673
Calcium	ppm	ASTM D5185m		1308	1335	1431
Phosphorus	ppm	ASTM D5185m	1360	736	694	662
Zinc	ppm	ASTM D5185m	1480	852	828	803
Sulfur	ppm	ASTM D5185m		3158	3002	3435

CONTAMINANTS

	method	limit/base	current	history1	history2	
Silicon	ppm	ASTM D5185m	>25	5	4	5
Sodium	ppm	ASTM D5185m		5	3	3
Potassium	ppm	ASTM D5185m	>20	6	2	2

INFRA-RED




	method	limit/base	current	history1	history2	
Soot %	%	*ASTM D7844	>3	0.6	0.4	0.8
Nitration	Abs/cm	*ASTM D7624	>20	10.5	9.3	12.1
Sulfation	Abs/.1mm	*ASTM D7415	>30	21.2	18.7	23.6

FLUID DEGRADATION

	method	limit/base	current	history1	history2	
Oxidation	Abs/.1mm	*ASTM D7414	>25	14.9	13.1	16.8
Base Number (BN)	mg KOH/g	ASTM D2896	12.2	6.2	7.4	7.2







OIL ANALYSIS REPORT

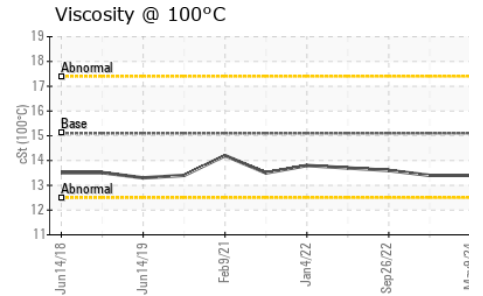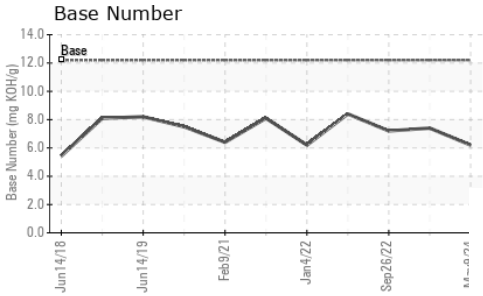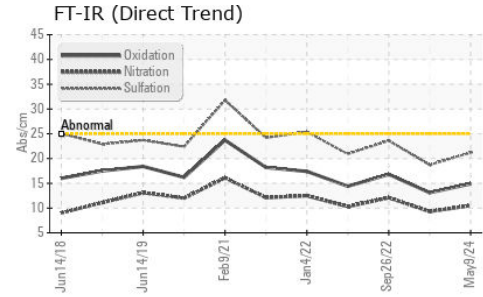

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D445 15.1	13.4	13.4	13.6

GRAPHS

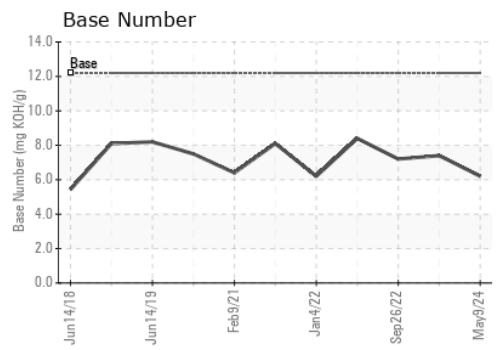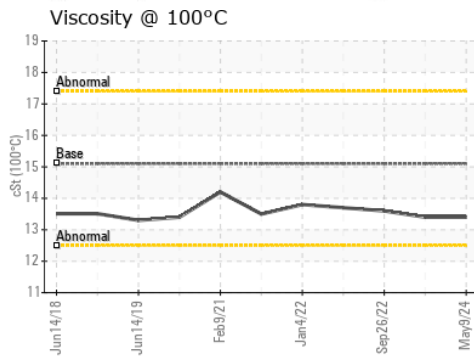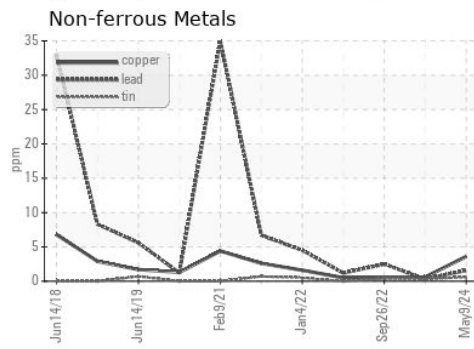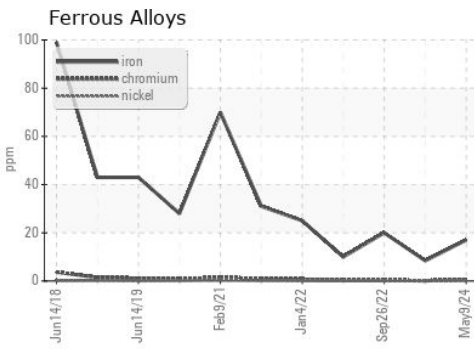

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : WC0889914 **Received** : 03 Jun 2024
Lab Number : **06197350** **Tested** : 04 Jun 2024
Unique Number : 11059473 **Diagnosed** : 04 Jun 2024 - Sean Felton
Test Package : CONST (Additional Tests: TBN)

CUSHNIE CONSTRUCTION CO INC
 4702 LAE RD
 KALAHEO, HI
 US 96741
 Contact: RALPH CUSHNIE
 ralph@cushniecci.com
 T: (808)332-9000
 F: (808)332-9400

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)