


OIL ANALYSIS REPORT

Sample Rating Trend

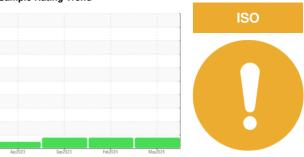

Machine Id

JOHN DEERE 134

Hydraulic System

JOHN DEERE HY-GARD HYD/TRANS (--- QTS)

Recommendation

No corrective action is recommended at this time. Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

There is a moderate amount of silt (particulates < 14 microns in size) present in the oil.


Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

NTS)		Apr202	Sep 2023	Feb 2024 M	ay2024	
SAMPLE INFORM	MATION	method	limit/base	current	history1	history2
Sample Number		Client Info		JR0189813	JR0189768	JR0135320
Sample Date		Client Info		14 May 2024	14 Feb 2024	20 Sep 2023
Machine Age	hrs	Client Info		2505	2000	1492
Oil Age	hrs	Client Info		2505	2000	1492
Oil Changed		Client Info		Not Changd	Not Changd	Not Changd
Sample Status				ATTENTION	ABNORMAL	ATTENTION
CONTAMINATIO	N	method	limit/base	current	history1	history2
Water		WC Method	>0.1	NEG	NEG	NEG
WEAR METALS		method	limit/base	current	history1	history2
PQ		ASTM D8184		14	18	12
Iron	ppm	ASTM D5185m	>20	2	6	3
Chromium	ppm	ASTM D5185m	>10	3	2	2
Nickel	ppm	ASTM D5185m	>10	0	0	<1
Titanium	ppm	ASTM D5185m		0	0	0
Silver	ppm	ASTM D5185m		0	0	0
Aluminum	ppm	ASTM D5185m	>10	<1	2	1
Lead	ppm	ASTM D5185m	>10	0	0	<1
Copper	ppm	ASTM D5185m	>75	<1	<1	0
Tin	ppm	ASTM D5185m	>10	0	0	<1
Vanadium	ppm	ASTM D5185m		0	0	0
Cadmium	ppm	ASTM D5185m		0	0	0
ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	6	0	5	5
Barium	ppm	ASTM D5185m	0	0	0	0
Molybdenum	ppm	ASTM D5185m	0	0	0	0
Manganese	ppm	ASTM D5185m		0	0	<1
Magnesium	ppm	ASTM D5185m	145	4	7	9
Calcium	ppm	ASTM D5185m	3570	345	279	295
Phosphorus	ppm	ASTM D5185m	1290	709	647	714
Zinc	ppm	ASTM D5185m	1640	898	931	966
Sulfur	ppm	ASTM D5185m		2374	2090	2125
CONTAMINANTS	;	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>20	0	2	2
Sodium	ppm	ASTM D5185m		4	0	3
Potassium	ppm	ASTM D5185m	>20	2	4	3
FLUID CLEANLIN	IESS	method	limit/base	current	history1	history2
Particles >4µm		ASTM D7647	>5000	5414	<u>▲</u> 16215	5727
Particles >6µm		ASTM D7647	>1300	399	36	124
Particles >14µm		ASTM D7647	>160	105	4	18
Particles >21µm		ASTM D7647	>40	52	1	6
Particles >38µm		ASTM D7647	>10	3	0	0
Particles >71µm		ASTM D7647	>3	0	0	0
Oil Cleanliness		ISO 4406 (c)	>19/17/14	20/16/14	△ 21/12/9	20/14/11



OIL ANALYSIS REPORT

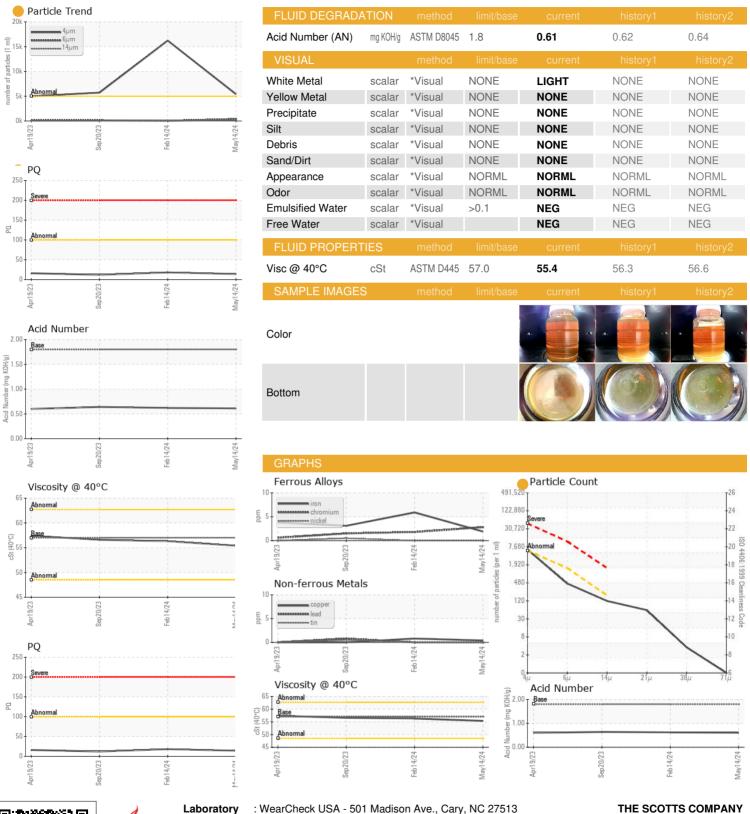





Certificate 12367

Sample No.

Lab Number

: 06197531 Unique Number : 11059654

: JR0189813 Received : 03 Jun 2024 **Tested** : 04 Jun 2024 Diagnosed

: 04 Jun 2024 - Don Baldridge

Test Package : CONST (Additional Tests: PQ)

To discuss this sample report, contact Customer Service at 1-800-237-1369. st - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

3175 BRIGHT LEAF RD LAWRENCEVILLE, VA US 23868

Contact: REX WATSON

T: (434)848-2727 F: (434)848-2250

Contact/Location: REX WATSON - SCOLAW