

OIL ANALYSIS REPORT

Sample Rating Trend





Area MINING ME-116 CATERPILLAR 980M KRS02985 Component Hydraulic System

SHELL Spirax S4 CX 10W (--- GAL)

DIAGNOSIS

Recommendation

Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

The amount and size of particulates present in the system are acceptable. There is no indication of any contamination in the oil.


Fluid Condition


The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.


| SAMPLE INFORM | MATION | method | limit/base | current | history1 | history2 |
|--|--------------------|---|--|--|---------------------------------------|----------------------------------|
| Sample Number | | Client Info | | WC0919978 | | |
| Sample Date | | Client Info | | 29 May 2024 | | |
| Machine Age | hrs | Client Info | | 14785 | | |
| Oil Age | hrs | Client Info | | 500 | | |
| Oil Changed | | Client Info | | Changed | | |
| Sample Status | | | | NORMAL | | |
| CONTAMINATIO | N | method | limit/base | current | history1 | history2 |
| Water | | WC Method | >0.1 | NEG | | |
| WEAR METALS | | method | limit/base | current | history1 | history2 |
| | 0.0.00 | | | | · · · · · · · · · · · · · · · · · · · | |
| Iron | ppm | ASTM D5185m | >20 | 5 | | |
| Chromium | ppm | | >10 | 0 | | |
| Nickel | ppm | ASTM D5185m | >10 | 0 | | |
| Titanium | ppm | ASTM D5185m | | 0 | | |
| Silver | ppm | ASTM D5185m | . 10 | 0 | | |
| Aluminum | ppm | ASTM D5185m | | <1 | | |
| Lead | ppm | ASTM D5185m | >10 | 0 | | |
| Copper Tin | ppm | ASTM D5185m ASTM D5185m | | 2 | | |
| | ppm | | >10 | - | | |
| Vanadium | ppm | ASTM D5185m | | 0 | | |
| Cadmium | ppm | ASTM D5185m | | 0 | | |
| ADDITIVES | | method | limit/base | current | history1 | history2 |
| Boron | ppm | ASTM D5185m | | 0 | | |
| Barium | ppm | ASTM D5185m | | 0 | | |
| Molybdenum | ppm | ASTM D5185m | | <1 | | |
| Manganese | ppm | ASTM D5185m | | 0 | | |
| Magnesium | ppm | ASTM D5185m | | 77 | | |
| Calcium | ppm | ASTM D5185m | | 198 | | |
| Phosphorus | ppm | ASTM D5185m | | 757 | | |
| Zinc | ppm | ASTM D5185m | | 920 | | |
| Sulfur | ppm | ASTM D5185m | | 2247 | | |
| CONTAMINANTS | | method | | current | | history2 |
| | | mounou | limit/base | current | history1 | motory |
| Silicon | ppm | | >20 | <1 | history1 | |
| Silicon Sodium | ppm ppm | | | | history1 | |
| | | ASTM D5185m | >20 | <1 | | |
| Sodium | ppm ppm | ASTM D5185m ASTM D5185m | >20 | <1 2 | | |
| Sodium Potassium | ppm ppm | ASTM D5185m ASTM D5185m ASTM D5185m | >20 >20 | <1 2 0 | | |
| Sodium Potassium FLUID CLEANLIN Particles >4µm | ppm ppm | ASTM D5185m ASTM D5185m ASTM D5185m method | >20 >20 limit/base >5000 | <1 2 0 current | history1 | history2 |
| Sodium Potassium FLUID CLEANLIN Particles >4µm Particles >6µm | ppm ppm | ASTM D5185m ASTM D5185m ASTM D5185m method ASTM D7647 | >20 >20 limit/base >5000 | <1 2 0 current 610 | history1 | history2 |
| Sodium Potassium FLUID CLEANLIN Particles >4µm Particles >6µm Particles >14µm | ppm ppm | ASTM D5185m ASTM D5185m ASTM D5185m method ASTM D7647 ASTM D7647 | >20 >20 limit/base >5000 >1300 >160 | <1 2 0 current 610 123 | history1 | history2 |
| Sodium Potassium FLUID CLEANLIN Particles >4µm Particles >6µm Particles >14µm Particles >21µm | ppm ppm | ASTM D5185m ASTM D5185m ASTM D5185m method ASTM D7647 ASTM D7647 ASTM D7647 | >20 >20 limit/base >5000 >1300 >160 | <1 2 0 current 610 123 9 | history1 | history2 |
| Sodium Potassium FLUID CLEANLIN | ppm ppm | ASTM D5185m ASTM D5185m ASTM D5185m Method ASTM D7647 ASTM D7647 ASTM D7647 ASTM D7647 | >20 >20 limit/base >5000 >1300 >160 >40 >10 | <1 2 0 current 610 123 9 3 | history1 | history2 |
| Sodium Potassium FLUID CLEANLIN Particles >4µm Particles >6µm Particles >14µm Particles >21µm Particles >38µm | ppm ppm | ASTM D5185m ASTM D5185m ASTM D5185m ASTM D7647 ASTM D7647 ASTM D7647 ASTM D7647 ASTM D7647 | >20 >20 limit/base >5000 >1300 >160 >40 >10 | <1 2 0 current 610 123 9 3 0 | history1 | history2 |
| Sodium Potassium FLUID CLEANLIN Particles >4µm Particles >6µm Particles >14µm Particles >21µm Particles >38µm Particles >71µm | ppm ppm NESS | ASTM D5185m ASTM D5185m ASTM D5185m ASTM D7647 ASTM D7647 ASTM D7647 ASTM D7647 ASTM D7647 ASTM D7647 | >20 >20 limit/base >5000 >1300 >160 >40 >10 >3 | <1 2 0 current 610 123 9 3 0 0 | history1 | history2 |
| Sodium Potassium FLUID CLEANLIN Particles >4µm Particles >6µm Particles >14µm Particles >21µm Particles >38µm Particles >71µm Oil Cleanliness | ppm ppm NESS | ASTM D5185m ASTM D5185m ASTM D5185m ASTM D7647 ASTM D7647 ASTM D7647 ASTM D7647 ASTM D7647 ASTM D7647 ISO 4406 (c) | >20 >20 limit/base >5000 >1300 >160 >40 >10 >3 >19/17/14 | <1 2 0 current 610 123 9 3 0 0 0 16/14/10 | history1 | history2 |



OIL ANALYSIS REPORT

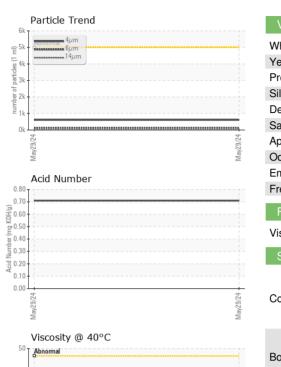

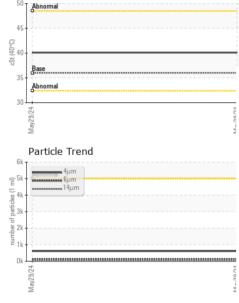

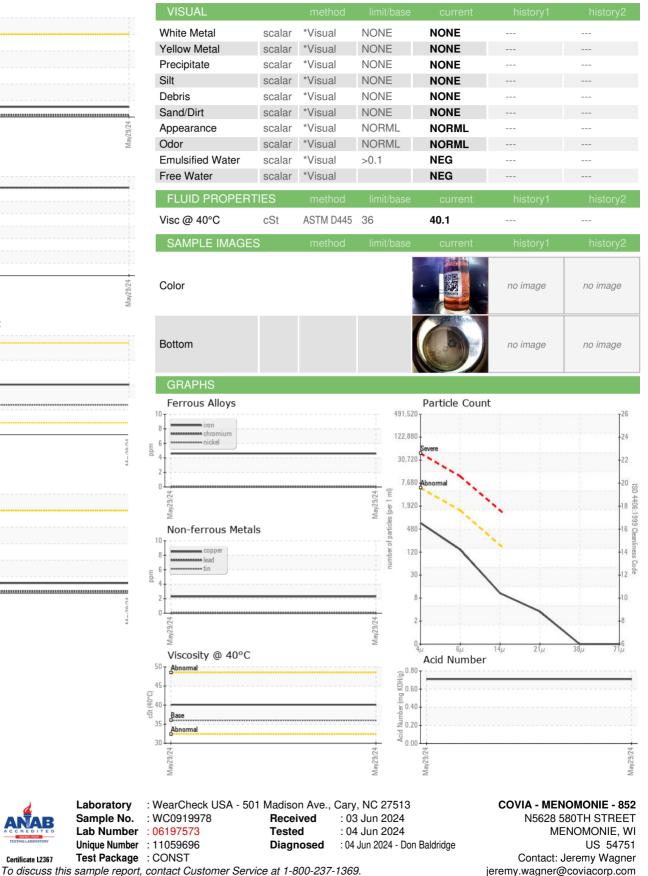

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

Report Id: COVMEN [WUSCAR] 06197573 (Generated: 06/04/2024 16:13:04) Rev: 1

Certificate 12367

Laboratory

Sample No.

Submitted By: Megan Mousel

Page 2 of 2

E:

T: (715)235-0942