



# OIL ANALYSIS REPORT

## Sample Rating Trend



ISO



Machine Id

## FILLER 5 HPU

Component

### Hydraulic System

Fluid

### CERTIFIED HITOP FG 68 (50 GAL)

#### DIAGNOSIS

##### Recommendation

No corrective action is recommended at this time. The filtration at the time of sampling has been noted. Resample at the next service interval to monitor.

##### Wear

All component wear rates are normal.


##### Contamination

There is a high amount of particulates present in the oil. The system cleanliness is above the acceptable limit for the target ISO 4406 cleanliness code.

##### Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

Particle Filter (Magn: 200 x)

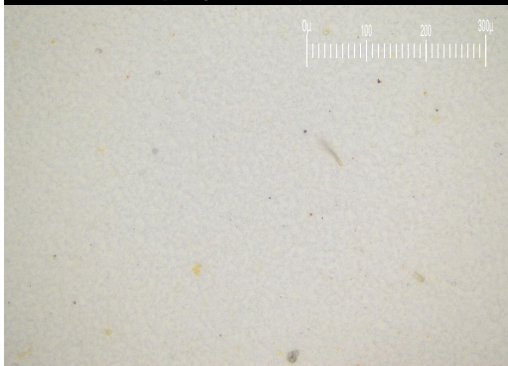

#### SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		PH0001364	---	---
Sample Date	Client Info		19 Apr 2024	---	---
Machine Age	yrs	Client Info	0	---	---
Oil Age	yrs	Client Info	4	---	---
Oil Changed	Client Info		Filtered	---	---
Sample Status			ABNORMAL	---	---

#### CONTAMINATION

	method	limit/base	current	history1	history2
Water	WC Method	>0.05	NEG	---	---

#### WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >20	0	---	---
Chromium	ppm	ASTM D5185m >20	0	---	---
Nickel	ppm	ASTM D5185m >20	0	---	---
Titanium	ppm	ASTM D5185m	0	---	---
Silver	ppm	ASTM D5185m	0	---	---
Aluminum	ppm	ASTM D5185m >20	0	---	---
Lead	ppm	ASTM D5185m >20	0	---	---
Copper	ppm	ASTM D5185m >20	0	---	---
Tin	ppm	ASTM D5185m >20	0	---	---
Vanadium	ppm	ASTM D5185m	0	---	---
Cadmium	ppm	ASTM D5185m	0	---	---

#### ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	0	---	---
Barium	ppm	ASTM D5185m	0	---	---
Molybdenum	ppm	ASTM D5185m	0	---	---
Manganese	ppm	ASTM D5185m	0	---	---
Magnesium	ppm	ASTM D5185m	0	---	---
Calcium	ppm	ASTM D5185m	<1	---	---
Phosphorus	ppm	ASTM D5185m	625	---	---
Zinc	ppm	ASTM D5185m	10	---	---
Sulfur	ppm	ASTM D5185m	608	---	---

#### CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >15	0	---	---
Sodium	ppm	ASTM D5185m	1	---	---
Potassium	ppm	ASTM D5185m >20	0	---	---

#### FLUID CLEANLINESS





	method	limit/base	current	history1	history2
Particles >4µm	ASTM D7647		5487	---	---
Particles >6µm	ASTM D7647	>640	▲ 2298	---	---
Particles >14µm	ASTM D7647	>80	▲ 332	---	---
Particles >21µm	ASTM D7647	>20	▲ 94	---	---
Particles >38µm	ASTM D7647	>4	3	---	---
Particles >71µm	ASTM D7647	>3	0	---	---
Oil Cleanliness	ISO 4406 (c)	>--/16/13	▲ 20/18/16	---	---

#### FLUID DEGRADATION

	method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D8045	0.70	---	---



# OIL ANALYSIS REPORT

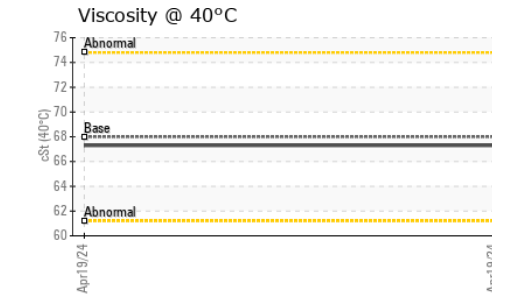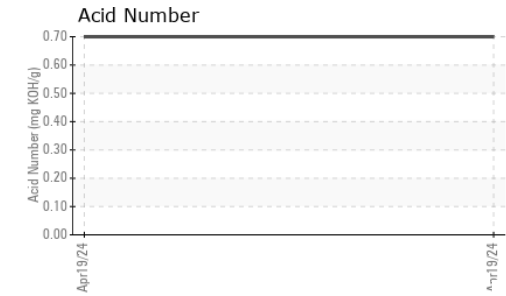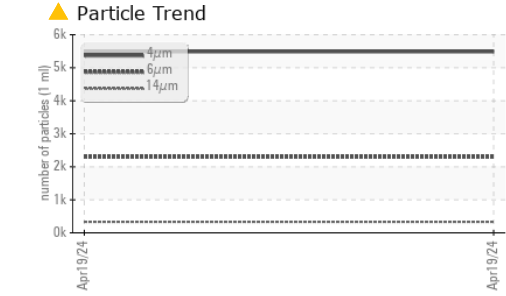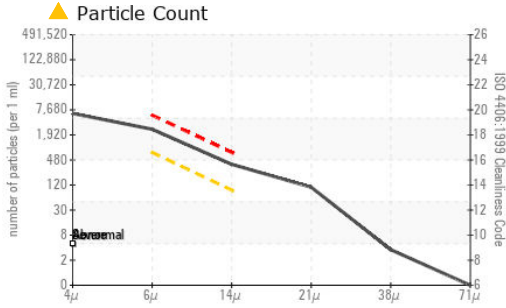






VISUAL	method	limit/base	current	history1	history2	
White Metal	scalar	*Visual	NONE	NONE	---	---
Yellow Metal	scalar	*Visual	NONE	NONE	---	---
Precipitate	scalar	*Visual	NONE	NONE	---	---
Silt	scalar	*Visual	NONE	NONE	---	---
Debris	scalar	*Visual	NONE	NONE	---	---
Sand/Dirt	scalar	*Visual	NONE	NONE	---	---
Appearance	scalar	*Visual	NORML	NORML	---	---
Odor	scalar	*Visual	NORML	NORML	---	---
Emulsified Water	scalar	*Visual	>0.05	NEG	---	---
Free Water	scalar	*Visual		NEG	---	---

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D445 68	67.3	---	---

SAMPLE IMAGES	method	limit/base	current	history1	history2
---------------	--------	------------	---------	----------	----------

Color				no image	no image
Bottom				no image	no image
PrtFilter				no image	no image

## GRAPHS

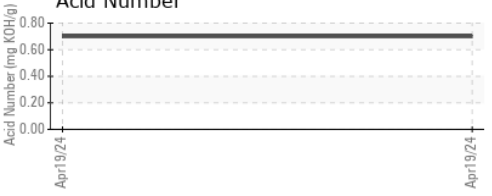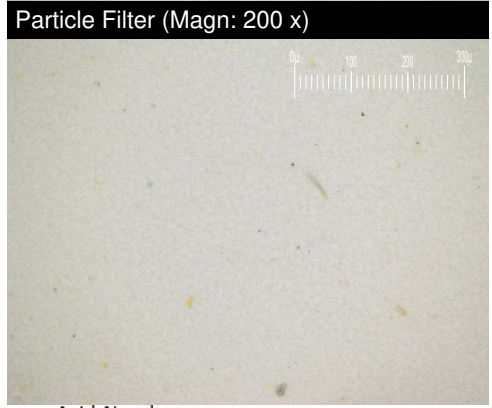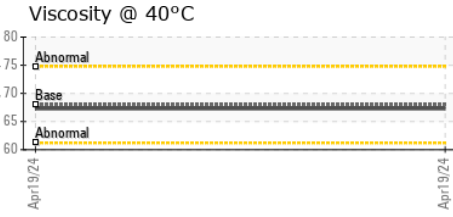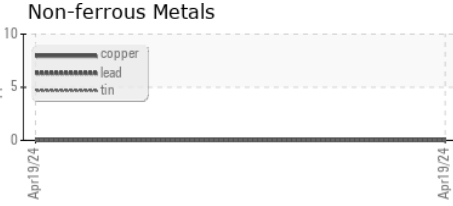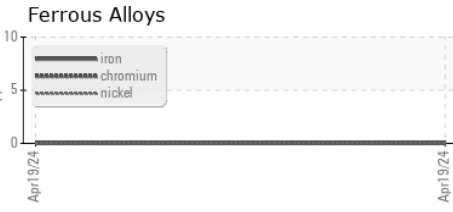

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : PH0001364      **Received** : 03 Jun 2024  
**Lab Number** : 06197606      **Tested** : 05 Jun 2024  
**Unique Number** : 11059729      **Diagnosed** : 05 Jun 2024 - Doug Bogart  
**Test Package** : PLANT ( Additional Tests: PrtFilter )

**J.G. BOSWELL CO - KERN TOMATO**  
 36889 HWY 58  
 BUTTONWILLOW, CA  
 US 93206  
 Contact: DENNIS COLLINS

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.  
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:  
F: