


# **OIL ANALYSIS REPORT**

Sample Rating Trend

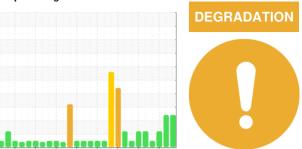

Machine Id

# GARDNER DENVER 6 (S/N U92804)

Component Compressor

**USPI COMP CLEAN II (--- GAL)** 

### Recommendation

Resample at the next service interval to monitor. NOTE: one of two samples received with same ID.

All component wear rates are normal.

### Contamination

There is a moderate amount of particulates present in the oil.


### Fluid Condition


The AN level is approaching the top-end of the recommended limit.


62017 Maržo18 Oczón18 Južó19 Maržo21 Decón21 Sep2022 Aprzó023 Feb2024									
SAMPLE INFORM	MATION	method	limit/base	current	history1	history2			
Sample Number		Client Info		USPM36343	USPM36347	USPM30148			
Sample Date		Client Info		02 Jun 2024	02 Jun 2024	26 Feb 2024			
Machine Age	hrs	Client Info		0	0	0			
Oil Age	hrs	Client Info		0	0	0			
Oil Changed		Client Info		N/A	N/A	N/A			
Sample Status				ATTENTION	ATTENTION	ABNORMAL			
WEAR METALS		method	limit/base	current	history1	history2			
Iron	ppm	ASTM D5185m	>50	0	0	0			
Chromium	ppm	ASTM D5185m	>10	0	0	<1			
Nickel	ppm	ASTM D5185m		0	0	0			
Titanium	ppm	ASTM D5185m		0	0	0			
Silver	ppm	ASTM D5185m		0	0	0			
Aluminum	ppm	ASTM D5185m	>25	0	0	0			
Lead	ppm	ASTM D5185m	>25	0	0	0			
Copper	ppm	ASTM D5185m	>50	3	3	2			
Tin	ppm	ASTM D5185m	>15	0	0	0			
Vanadium	ppm	ASTM D5185m		0	0	0			
Cadmium	ppm	ASTM D5185m		0	0	0			
ADDITIVES		method	limit/base	current	history1	history2			
Boron	ppm	ASTM D5185m		0	0	0			
Barium	ppm	ASTM D5185m		0	0	0			
Molybdenum	ppm	ASTM D5185m		0	0	0			
Manganese	ppm	ASTM D5185m		0	0	0			
Magnesium	ppm	ASTM D5185m		0	0	<1			
Calcium	ppm	ASTM D5185m		1	<1	0			
Phosphorus	ppm	ASTM D5185m		0	0	4			
Zinc	ppm	ASTM D5185m		1	2	0			
Sulfur	ppm	ASTM D5185m		0	0	0			
CONTAMINANTS		method	limit/base	current	history1	history2			
Silicon		ASTM D5185m		0	0	0			
Sodium	ppm	ASTM D5185m	>25	3	<1	0			
Potassium	ppm	ASTM D5185m	>20	0	0	<1			
Water	ppm %	ASTM D5165111	. = -	0.033	0.029	0.013			
ppm Water	ppm	ASTM D6304 ASTM D6304	>0.1	338	295	135			
FLUID CLEANLIN		method	limit/base	current	history1	history2			
Particles >4µm		ASTM D7647	>10000	5463	3628	2503			
Particles >6µm		ASTM D7647	>2500	2076	1475	505			
Particles >14µm		ASTM D7647	>320	440	352	41			
Particles >21µm		ASTM D7647	>80	<u>150</u>	130	14			
Particles >38µm		ASTM D7647	>20	6	8	1			
Particles >71µm Oil Cleanliness		ASTM D7647 ISO 4406 (c)	>4 >20/18/15	0 20/18/16	0 19/18/16	19/16/13			
	TION -								
FLUID DEGRADA		method	limit/base	current	history1	history2			
Acid Number (AN)	mg KOH/g	ASTM D8045		<u> </u>	▲ 1.69	<u>^</u> 2.91			





## **OIL ANALYSIS REPORT**






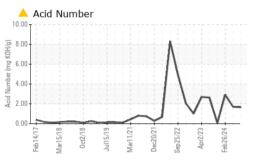






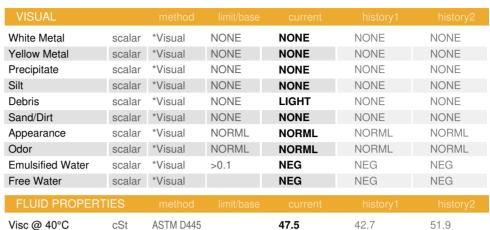


isc @ 40°C	cSt	ASTM D445	47.5	42.7	51.9
SAMPLE IMAG	FS.				

Color





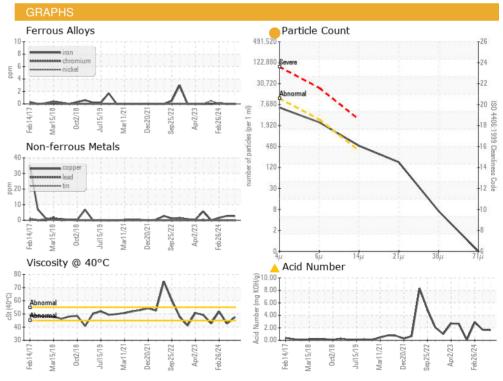





Certificate 12367

Laboratory Sample No.

: USPM36343 Lab Number : 06197667 Unique Number : 11059790 Test Package : IND 2

: WearCheck USA - 501 Madison Ave., Cary, NC 27513 Received : 03 Jun 2024

Diagnosed

**Tested** : 04 Jun 2024 : 05 Jun 2024 - Doug Bogart **CARGILL** 

Contact:

T:

F:

FORT MORGAN, CO US

To discuss this sample report, contact Customer Service at 1-800-237-1369.

 $^st$  - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

Report Id: CARFORCO [WUSCAR] 06197667 (Generated: 06/07/2024 04:05:50) Rev: 1

Contact/Location: ? ? - CARFORCO