




OIL ANALYSIS REPORT

Sample Rating Trend

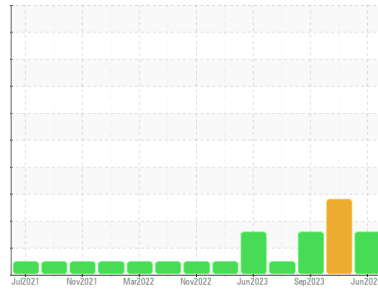

DIRT



Machine Id
4B (S/N 2000007322)
 Component
Vacuum Pump
 Fluid
USPI VAC 100 (--- GAL)

DIAGNOSIS

Recommendation

Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

There is no indication of any contamination in the oil. The amount and size of particulates present in the system are acceptable.

Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

SAMPLE INFORMATION

| | method | limit/base | current | history1 | history2 |
|---------------|-------------|-------------|--------------------|-------------|-------------|
| Sample Number | Client Info | | USPM36383 | USPM30815 | USPM29810 |
| Sample Date | Client Info | | 02 Jun 2024 | 29 Jan 2024 | 27 Sep 2023 |
| Machine Age | hrs | Client Info | 0 | 0 | 0 |
| Oil Age | hrs | Client Info | 0 | 0 | 0 |
| Oil Changed | Client Info | | N/A | N/A | N/A |
| Sample Status | | | MARGINAL | ABNORMAL | MARGINAL |

WEAR METALS

| | method | limit/base | current | history1 | history2 |
|----------|--------|-----------------|----------|----------|----------|
| Iron | ppm | ASTM D5185m >20 | 0 | 5 | 4 |
| Chromium | ppm | ASTM D5185m >20 | 0 | <1 | 0 |
| Nickel | ppm | ASTM D5185m >20 | 0 | <1 | 0 |
| Titanium | ppm | ASTM D5185m | 0 | <1 | 0 |
| Silver | ppm | ASTM D5185m | 0 | 0 | 0 |
| Aluminum | ppm | ASTM D5185m >20 | 0 | 0 | <1 |
| Lead | ppm | ASTM D5185m >20 | 0 | 0 | 0 |
| Copper | ppm | ASTM D5185m >20 | 0 | <1 | 0 |
| Tin | ppm | ASTM D5185m >20 | 0 | <1 | <1 |
| Vanadium | ppm | ASTM D5185m | 0 | <1 | 0 |
| Cadmium | ppm | ASTM D5185m | 0 | 0 | 0 |

ADDITIVES

| | method | limit/base | current | history1 | history2 |
|------------|--------|------------------|------------|----------|----------|
| Boron | ppm | ASTM D5185m 0 | 0 | 0 | 0 |
| Barium | ppm | ASTM D5185m 0 | 0 | 0 | 0 |
| Molybdenum | ppm | ASTM D5185m 0 | 0 | <1 | 0 |
| Manganese | ppm | ASTM D5185m | 0 | 0 | 0 |
| Magnesium | ppm | ASTM D5185m 0 | 0 | 0 | 0 |
| Calcium | ppm | ASTM D5185m 0 | 3 | 1 | 0 |
| Phosphorus | ppm | ASTM D5185m 1800 | 902 | 791 | 763 |
| Zinc | ppm | ASTM D5185m 0 | 0 | 0 | 0 |
| Sulfur | ppm | ASTM D5185m 0 | 55 | 0 | 75 |

CONTAMINANTS

| | method | limit/base | current | history1 | history2 |
|-----------|--------|------------------|--------------|----------|----------|
| Silicon | ppm | ASTM D5185m >15 | ▲ 23 | ▲ 37 | ▲ 21 |
| Sodium | ppm | ASTM D5185m | 3 | 0 | 2 |
| Potassium | ppm | ASTM D5185m >20 | 0 | 1 | 2 |
| Water | % | ASTM D6304 >.1 | 0.033 | 0.032 | 0.023 |
| ppm Water | ppm | ASTM D6304 >1000 | 330 | 321 | 237.7 |

FLUID CLEANLINESS

| | method | limit/base | current | history1 | history2 |
|-----------------|--------------|------------|-----------------|------------|----------|
| Particles >4µm | ASTM D7647 | >5000 | 289 | ▲ 11663 | 1303 |
| Particles >6µm | ASTM D7647 | >1300 | 99 | ▲ 2668 | 153 |
| Particles >14µm | ASTM D7647 | >160 | 15 | 49 | 20 |
| Particles >21µm | ASTM D7647 | >40 | 3 | 8 | 7 |
| Particles >38µm | ASTM D7647 | >10 | 0 | 0 | 0 |
| Particles >71µm | ASTM D7647 | >3 | 0 | 0 | 0 |
| Oil Cleanliness | ISO 4406 (c) | >19/17/14 | 15/14/11 | ▲ 21/19/13 | 18/14/11 |


FLUID DEGRADATION

| | method | limit/base | current | history1 | history2 |
|------------------|----------|-----------------|-------------|----------|----------|
| Acid Number (AN) | mg KOH/g | ASTM D8045 0.05 | 0.17 | 0.20 | 0.22 |




OIL ANALYSIS REPORT


▲ Silicon (ppm)

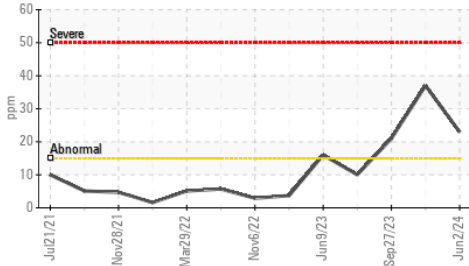


Water (KF)

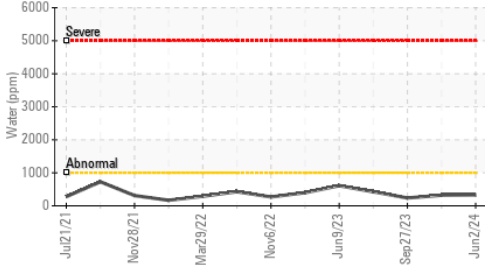


Particle Trend

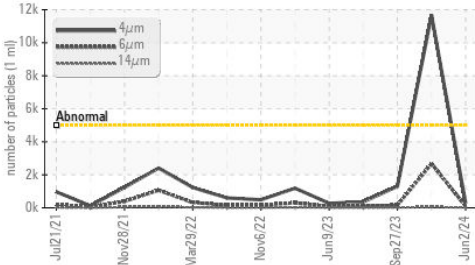

Water (KF)

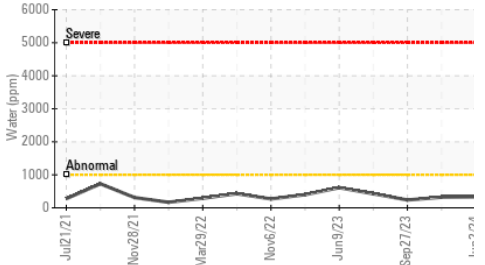

Viscosity @ 40°C

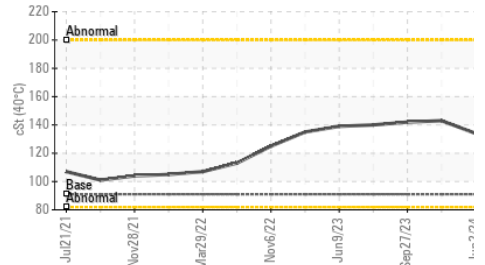


| VISUAL | method | limit/base | current | history1 | history2 |
|------------------|--------|------------|---------|----------|----------|
| White Metal | scalar | *Visual | NONE | NONE | NONE |
| Yellow Metal | scalar | *Visual | NONE | NONE | NONE |
| Precipitate | scalar | *Visual | NONE | NONE | NONE |
| Silt | scalar | *Visual | NONE | NONE | NONE |
| Debris | scalar | *Visual | NONE | NONE | NONE |
| Sand/Dirt | scalar | *Visual | NONE | NONE | NONE |
| Appearance | scalar | *Visual | NORML | NORML | NORML |
| Odor | scalar | *Visual | NORML | NORML | NORML |
| Emulsified Water | scalar | *Visual | >.1 | NEG | NEG |
| Free Water | scalar | *Visual | | NEG | NEG |

| FLUID PROPERTIES | method | limit/base | current | history1 | history2 |
|------------------|--------|--------------|---------|----------|----------|
| Visc @ 40°C | cSt | ASTM D445 91 | 134 | 143 | 142 |

| SAMPLE IMAGES | method | limit/base | current | history1 | history2 |
|---------------|--------|------------|---------|----------|----------|
|---------------|--------|------------|---------|----------|----------|

Color




Bottom




GRAPHS


Ferrous Alloys

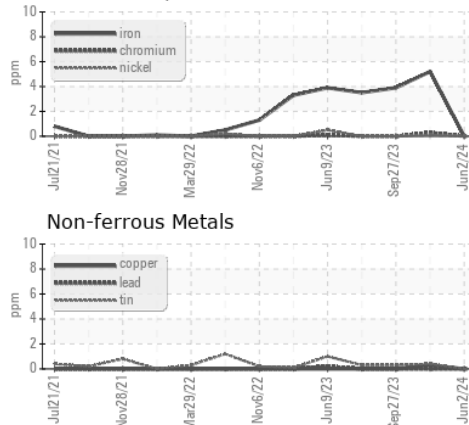


Non-ferrous Metals

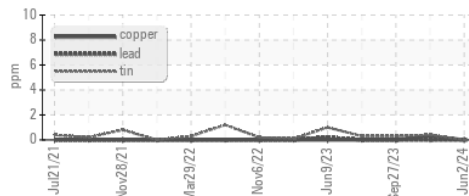


Viscosity @ 40°C

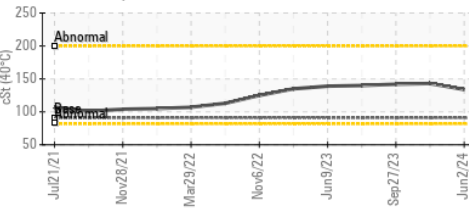

Particle Count

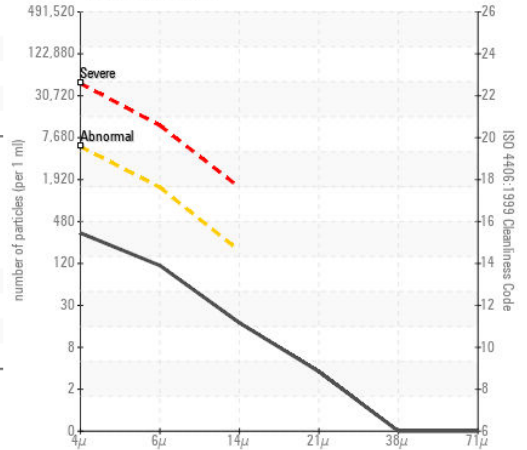

Acid Number

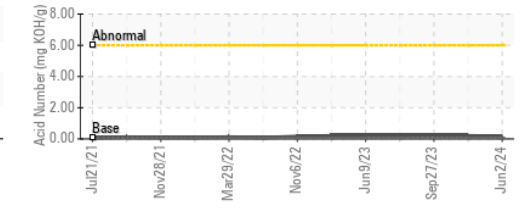

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
 Sample No. : USPM36383
 Lab Number : 06197685
 Unique Number : 11059808
 Test Package : IND 2

Received : 03 Jun 2024
 Tested : 04 Jun 2024
 Diagnosed : 05 Jun 2024 - Doug Bogart

CARGILL FORT MORGAN
 1505 E BURLINGTON AVE
 FORT MORGAN, CO
 US 80701
 Contact: JOE ROSENFELD

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:
F: