



OIL ANALYSIS REPORT

Area

SLA
Machine Id

53953 - BRISKET SAW PPK (S/N 114614)


Component

Hydraulic System

Fluid

USPI FG HYD 46 (--- GAL)

Sample Rating Trend

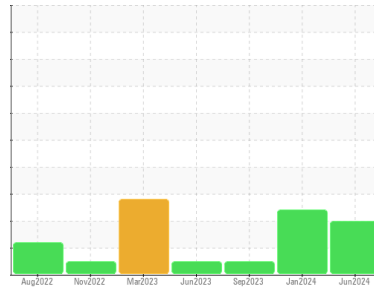

ISO



DIAGNOSIS

Recommendation

We recommend you service the filters on this component. Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

There is a high amount of particulates present in the oil.

Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

SAMPLE INFORMATION

method	limit/base	current	history1	history2
Sample Number	Client Info	USPM36398	USPM30802	USPM29824
Sample Date	Client Info	02 Jun 2024	28 Jan 2024	24 Sep 2023
Machine Age	hrs	Client Info	0	0
Oil Age	hrs	Client Info	0	0
Oil Changed	Client Info	N/A	N/A	N/A
Sample Status		ABNORMAL	ABNORMAL	NORMAL

WEAR METALS

method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >20	0	1
Chromium	ppm	ASTM D5185m >20	0	0
Nickel	ppm	ASTM D5185m >20	0	0
Titanium	ppm	ASTM D5185m	0	<1
Silver	ppm	ASTM D5185m	0	0
Aluminum	ppm	ASTM D5185m >20	0	<1
Lead	ppm	ASTM D5185m >20	0	0
Copper	ppm	ASTM D5185m >20	0	<1
Tin	ppm	ASTM D5185m >20	0	0
Vanadium	ppm	ASTM D5185m	0	0
Cadmium	ppm	ASTM D5185m	0	0

ADDITIVES

method	limit/base	current	history1	history2	
Boron	ppm	ASTM D5185m	0	0	
Barium	ppm	ASTM D5185m	0	0	
Molybdenum	ppm	ASTM D5185m	0	0	
Manganese	ppm	ASTM D5185m	0	0	
Magnesium	ppm	ASTM D5185m	0	0	
Calcium	ppm	ASTM D5185m	0	0	
Phosphorus	ppm	ASTM D5185m 725	567	510	546
Zinc	ppm	ASTM D5185m	0	0	0
Sulfur	ppm	ASTM D5185m 625	635	529	544

CONTAMINANTS

method	limit/base	current	history1	history2	
Silicon	ppm	ASTM D5185m >15	0	2	2
Sodium	ppm	ASTM D5185m	<1	0	0
Potassium	ppm	ASTM D5185m >20	0	0	0
Water	%	ASTM D6304 >0.05	0.002	0.004	0.001
ppm Water	ppm	ASTM D6304 >500	20	48	0.00


FLUID CLEANLINESS

method	limit/base	current	history1	history2
Particles >4µm	ASTM D7647 >5000	9195	18072	878
Particles >6µm	ASTM D7647 >1300	3363	5984	215
Particles >14µm	ASTM D7647 >160	407	558	14
Particles >21µm	ASTM D7647 >40	118	182	4
Particles >38µm	ASTM D7647 >10	4	13	0
Particles >71µm	ASTM D7647 >3	1	1	0
Oil Cleanliness	ISO 4406 (c) >19/17/14	20/19/16	21/20/16	17/15/11


FLUID DEGRADATION

method	limit/base	current	history1	history2	
Acid Number (AN)	mg KOH/g	ASTM D8045 0.36	0.36	0.32	0.32


▲ Particle Trend

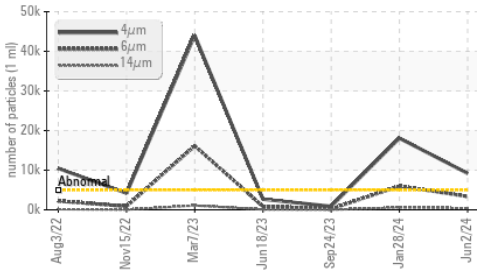


Water (KF)

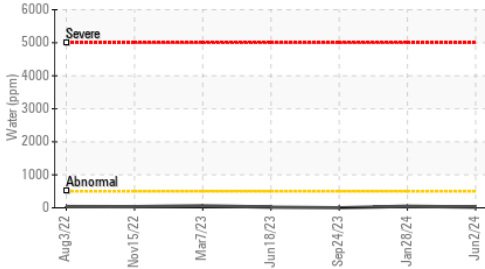


Acid Number

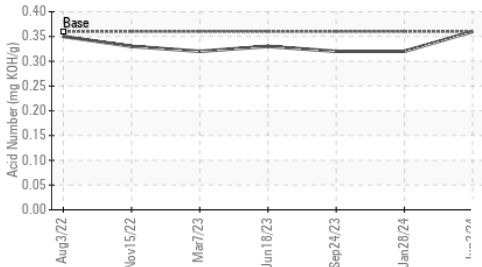

Water (KF)

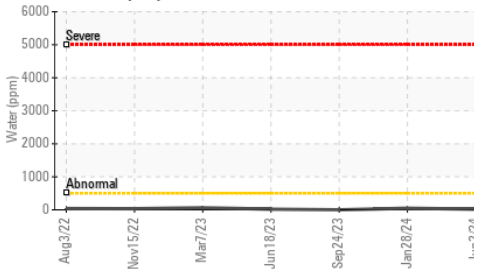

Viscosity @ 40°C

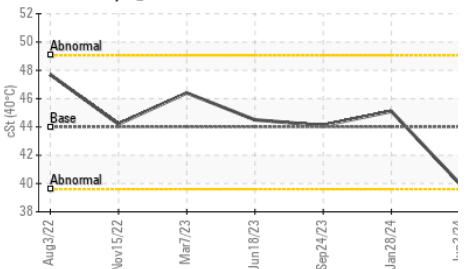

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	LIGHT	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.05	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D445 44	40.0	45.1	44.1

SAMPLE IMAGES	method	limit/base	current	history1	history2
---------------	--------	------------	---------	----------	----------


Color

Bottom




GRAPHS


Ferrous Alloys

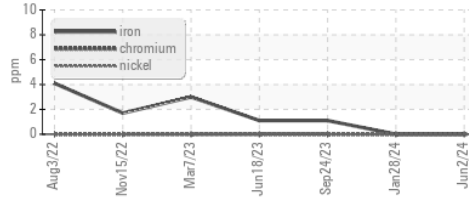


Non-ferrous Metals

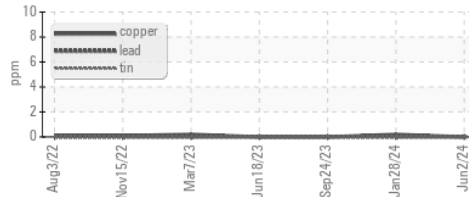


Viscosity @ 40°C

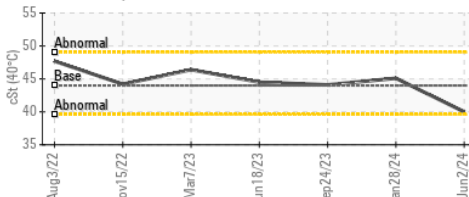

▲ Particle Count

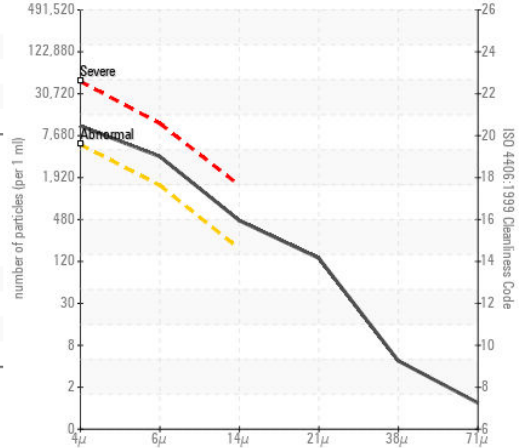

Acid Number

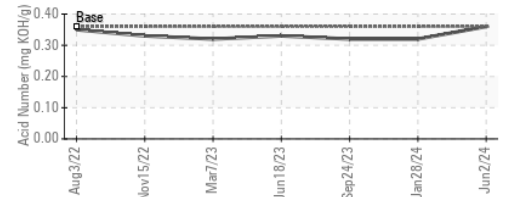

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : USPM36398
Lab Number : 06197701
Unique Number : 11059824
Test Package : IND 2

Received : 03 Jun 2024
Tested : 04 Jun 2024
Diagnosed : 06 Jun 2024 - Doug Bogart

CARGILL FORT MORGAN
 1505 E BURLINGTON AVE
 FORT MORGAN, CO
 US 80701
 Contact: JOE ROSENFELD

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:
F: