

OIL ANALYSIS REPORT

Area {UNASSIGNED} YORK WSU Mazurek Ch 1 (S/N SFTM990390)

Centrifugal Compressor

YORK TYPE K (20 GAL)

DIAGNOSIS

Recommendation

Resample at the next service interval to monitor. (Customer Sample Comment: Routine maintenance)

Wear


All component wear rates are normal.

Contamination

The amount and size of particulates present in the system are acceptable. There is no indication of any contamination in the oil.

Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.





NORMAL

SAMPLE INFORM	MATION	method	limit/base	current	history1	history2
Sample Number		Client Info		WC0827183		
Sample Date		Client Info		28 May 2024		
Machine Age	hrs	Client Info		47243		
Oil Age	hrs	Client Info		47243		
Oil Changed		Client Info		Changed		
Sample Status				NORMAL		
WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>50	0		
Chromium	ppm	ASTM D5185m	>10	0		
Nickel	ppm	ASTM D5185m		0		
Titanium	ppm	ASTM D5185m		0		
Silver	ppm	ASTM D5185m		0		
Aluminum	ppm	ASTM D5185m	>25	0		
Lead	ppm	ASTM D5185m	>25	0		
Copper	ppm	ASTM D5185m	>50	0		
Tin	ppm	ASTM D5185m	>15	<1		
Vanadium	ppm	ASTM D5185m		0		
Cadmium	ppm	ASTM D5185m		0		
ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	0	0		
Barium	ppm	ASTM D5185m	0	0		
Molybdenum	ppm	ASTM D5185m	0	0		
Manganese	ppm	ASTM D5185m	0	<1		
Magnesium	ppm	ASTM D5185m	0	0		
Calcium	ppm	ASTM D5185m	0	0		
Phosphorus	ppm	ASTM D5185m	5	1		
Zinc	ppm	ASTM D5185m	0	0		
Sulfur	ppm	ASTM D5185m	10	0		
CONTAMINANTS	3	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>25	9		
Sodium	ppm	ASTM D5185m		0		
Potassium	ppm	ASTM D5185m	>20	<1		
Water	%	ASTM D6304	>0.03	0.027		
ppm Water	ppm	ASTM D6304	>300	276		
FLUID CLEANLIN	IESS	method	limit/base	current	history1	history2
Particles >4µm		ASTM D7647	>10000	1678		
Particles >6µm		ASTM D7647	>2500	232		
Particles >14µm		ASTM D7647	>320	5		
Particles >21µm		ASTM D7647	>80	2		
Particles >38µm		ASTM D7647	>20	0		
Particles >71µm		ASTM D7647	>4	0		
Oil Cleanliness		ISO 4406 (c)	>20/18/15	18/15/10		
FLUID DEGRADA	ATION	method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D8045	0.03	0.027		

Sample Rating Trend



OIL ANALYSIS REPORT

NONE

NONE

NONE

NONE

NONE

NONE

NORML

NORML

NEG

NEG

28.1

Particle Count

Acid Number

491,52

122,88

30 72

7.68

1.92

480

120

31

@^{0.04}

H 0.03

0.02

0.0

0.00

Acid

Mav28/24

: 03 Jun 2024

: 04 Jun 2024

May28/24. cles (per 1 ml) no image

no image

no image

no imade

4406

:1999 Cle

14

NONE

NONE

NONE

NONE

NONE


NONE

NORML

NORML

>0.03

32.0

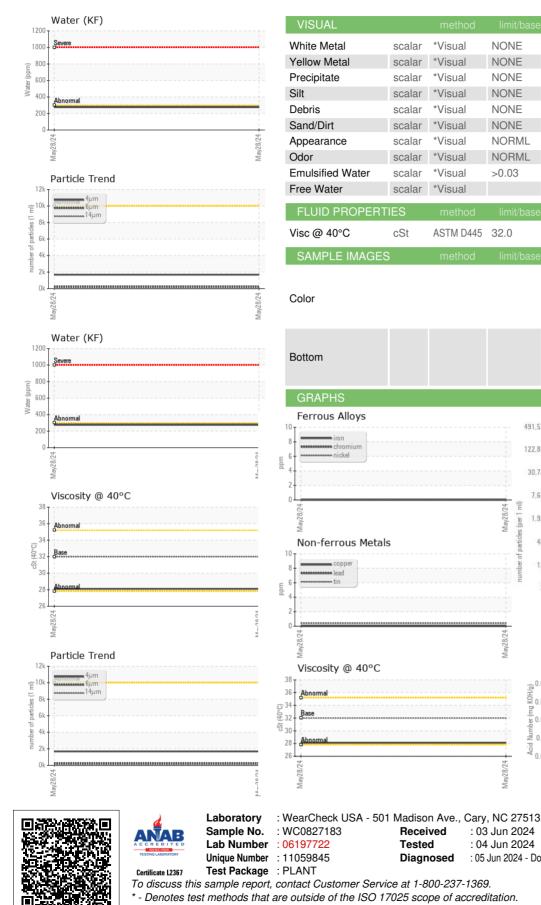

: 05 Jun 2024 - Don Baldridge US 48326 Contact: GARY WATSON garyw@thermalnetics.com T: (248)276-3351 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012) E:

Report Id: THEAUB [WUSCAR] 06197722 (Generated: 06/06/2024 07:56:49) Rev: 1

Submitted By: SHELLY MANN

THERMALNETICS, INC

AUBURN HILLS, MI

3955 PINNACLE COURT SUITE 200

Page 2 of 2