




# OIL ANALYSIS REPORT

Sample Rating Trend

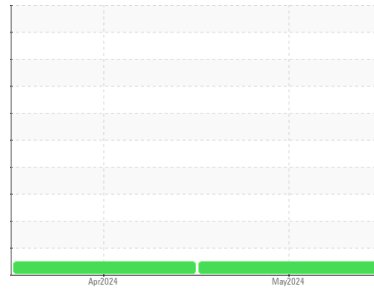

**NORMAL**



Machine Id  
**GMTX 132 10084701 - Locomotive 1500 HP Diesel/electric**  
 Component  
**Diesel Engine**  
 Fluid  
**SHELL CAPRINUS XR 40 (--- GAL)**

## DIAGNOSIS

### Recommendation

Resample at the next service interval to monitor.

### Wear

Metal levels are typical for a new component breaking in.

### Contamination

There is no indication of any contamination in the oil.

### Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

## SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		<b>WC0897130</b>	WC0897128	---
Sample Date	Client Info		<b>20 May 2024</b>	16 Apr 2024	---
Machine Age	hrs	Client Info	<b>2</b>	1	---
Oil Age	hrs	Client Info	<b>2</b>	1	---
Oil Changed	Client Info		<b>Not Changed</b>	Not Changed	---
Sample Status			<b>NORMAL</b>	NORMAL	---

## CONTAMINATION

	method	limit/base	current	history1	history2
Fuel	WC Method	>5	<b>&lt;1.0</b>	<1.0	---
Water	WC Method	>0.2	<b>NEG</b>	NEG	---
Glycol	WC Method		<b>NEG</b>	NEG	---

## WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >100	<b>38</b>	44	---
Chromium	ppm	ASTM D5185m >20	<b>2</b>	1	---
Nickel	ppm	ASTM D5185m >4	<b>0</b>	0	---
Titanium	ppm	ASTM D5185m	<b>0</b>	<1	---
Silver	ppm	ASTM D5185m >3	<b>0</b>	0	---
Aluminum	ppm	ASTM D5185m >20	<b>2</b>	3	---
Lead	ppm	ASTM D5185m >40	<b>51</b>	32	---
Copper	ppm	ASTM D5185m >330	<b>82</b>	72	---
Tin	ppm	ASTM D5185m >15	<b>2</b>	3	---
Vanadium	ppm	ASTM D5185m	<b>0</b>	<1	---
Cadmium	ppm	ASTM D5185m	<b>&lt;1</b>	<1	---

## ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	<b>38</b>	57	---
Barium	ppm	ASTM D5185m	<b>0</b>	2	---
Molybdenum	ppm	ASTM D5185m	<b>35</b>	47	---
Manganese	ppm	ASTM D5185m	<b>1</b>	1	---
Magnesium	ppm	ASTM D5185m	<b>46</b>	55	---
Calcium	ppm	ASTM D5185m	<b>2928</b>	2982	---
Phosphorus	ppm	ASTM D5185m	<b>30</b>	28	---
Zinc	ppm	ASTM D5185m	<b>37</b>	52	---
Sulfur	ppm	ASTM D5185m	<b>2633</b>	3029	---

## CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >25	<b>9</b>	10	---
Sodium	ppm	ASTM D5185m	<b>9</b>	13	---
Potassium	ppm	ASTM D5185m >20	<b>6</b>	8	---

## INFRA-RED




	method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844 >3	<b>0.2</b>	0.2	---
Nitration	Abs/cm	*ASTM D7624 >20	<b>8.1</b>	7.2	---
Sulfation	Abs/.1mm	*ASTM D7415 >30	<b>21.0</b>	21.0	---

## FLUID DEGRADATION

	method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	*ASTM D7414 >25	<b>16.4</b>	4.8	---
Base Number (BN)	mg KOH/g	ASTM D2896 13	<b>9.36</b>	9.38	---







# OIL ANALYSIS REPORT

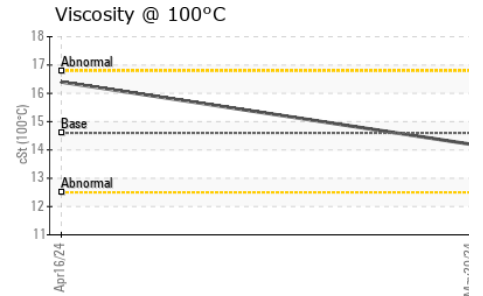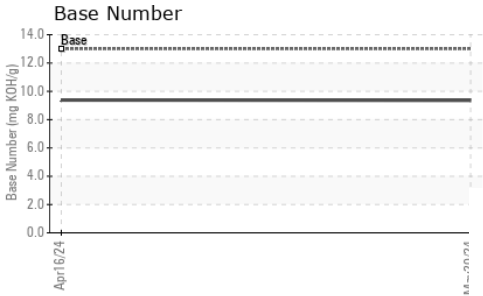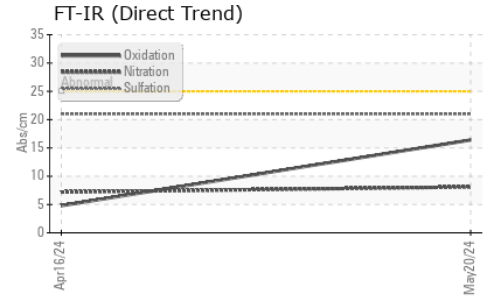

VISUAL	method	limit/base	current	history1	history2	
White Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	---
Yellow Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	---
Precipitate	scalar	*Visual	NONE	<b>NONE</b>	NONE	---
Silt	scalar	*Visual	NONE	<b>NONE</b>	NONE	---
Debris	scalar	*Visual	NONE	<b>NONE</b>	NONE	---
Sand/Dirt	scalar	*Visual	NONE	<b>NONE</b>	NONE	---
Appearance	scalar	*Visual	NORML	<b>NORML</b>	NORML	---
Odor	scalar	*Visual	NORML	<b>NORML</b>	NORML	---
Emulsified Water	scalar	*Visual	>0.2	<b>NEG</b>	NEG	---
Free Water	scalar	*Visual		<b>NEG</b>	NEG	---

FLUID PROPERTIES	method	limit/base	current	history1	history2	
Visc @ 100°C	cSt	ASTM D445	14.6	<b>14.2</b>	16.4	---

## GRAPHS

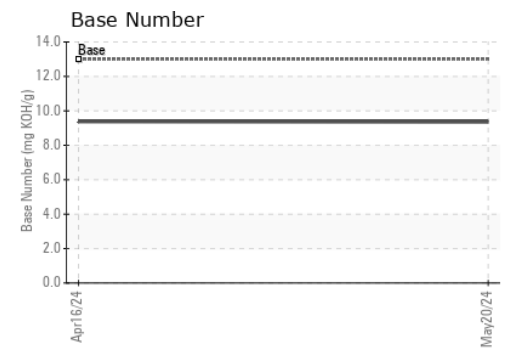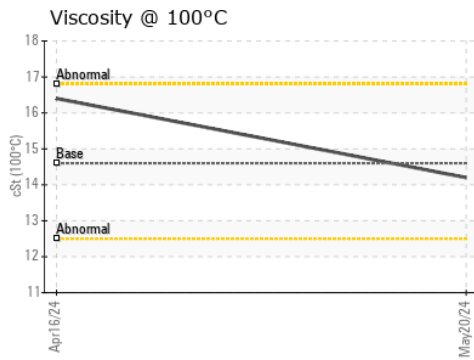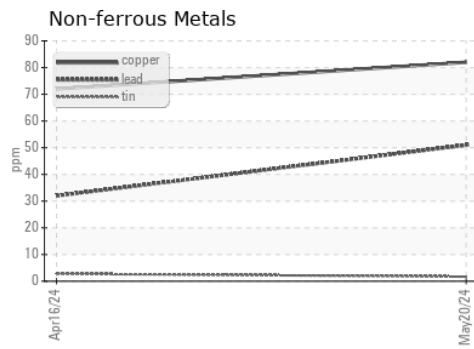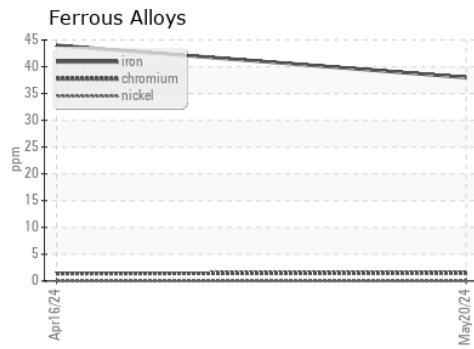

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : WC0897130      **Received** : 03 Jun 2024  
**Lab Number** : **06197897**      **Tested** : 04 Jun 2024  
**Unique Number** : 11060020      **Diagnosed** : 04 Jun 2024 - Don Baldrige  
**Test Package** : IND 2

**HUNTINGTON INGALLS INDUSTRIES**  
 4101 WASHINGTON AVE  
 NEWPORT NEWS, VA  
 US 23607  
 Contact: SCOTT SCHWEGEL  
 scott.schwegel@vallen.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.  
 \* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.  
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)