




OIL ANALYSIS REPORT

Sample Rating Trend

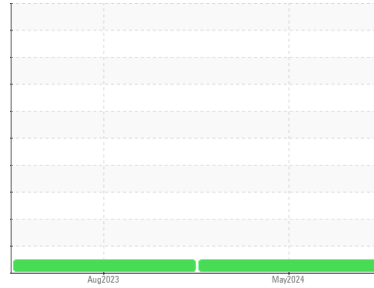

NORMAL



Machine Id
JOHN DEERE 450K 1T0450KXTPF437738
 Component
Right Final Drive
 Fluid
NOT GIVEN (--- GAL)

DIAGNOSIS

Recommendation

Resample at the next service interval to monitor.
 Please specify the brand, type, and viscosity of the oil on your next sample.

Wear

All component wear rates are normal.

Contamination

There is no indication of any contamination in the oil.

Fluid Condition

The condition of the oil is acceptable for the time in service.

SAMPLE INFORMATION		method	limit/base	current	history1	history2
Sample Number	Client Info			JR0212756	JR0186319	---
Sample Date	Client Info			29 May 2024	29 Aug 2023	---
Machine Age	hrs	Client Info		984	506	---
Oil Age	hrs	Client Info		984	506	---
Oil Changed	Client Info			Not Chngd	Not Chngd	---
Sample Status				NORMAL	NORMAL	---

CONTAMINATION		method	limit/base	current	history1	history2
Water	WC Method		>0.075	NEG	NEG	---

WEAR METALS		method	limit/base	current	history1	history2
PQ		ASTM D8184	>1250	39	34	---
Iron	ppm	ASTM D5185m	>750	48	38	---
Chromium	ppm	ASTM D5185m	>9	<1	<1	---
Nickel	ppm	ASTM D5185m	>10	0	0	---
Titanium	ppm	ASTM D5185m		0	0	---
Silver	ppm	ASTM D5185m		0	0	---
Aluminum	ppm	ASTM D5185m	>40	<1	3	---
Lead	ppm	ASTM D5185m	>15	0	0	---
Copper	ppm	ASTM D5185m	>40	<1	0	---
Tin	ppm	ASTM D5185m	>10	0	0	---
Vanadium	ppm	ASTM D5185m		0	0	---
Cadmium	ppm	ASTM D5185m		0	0	---




ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m		0	0	---
Barium	ppm	ASTM D5185m		0	0	---
Molybdenum	ppm	ASTM D5185m		<1	<1	---
Manganese	ppm	ASTM D5185m		2	2	---
Magnesium	ppm	ASTM D5185m		98	107	---
Calcium	ppm	ASTM D5185m		3542	3583	---
Phosphorus	ppm	ASTM D5185m		1056	1034	---
Zinc	ppm	ASTM D5185m		1247	1293	---
Sulfur	ppm	ASTM D5185m		3970	4386	---

CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>75	4	6	---
Sodium	ppm	ASTM D5185m	>51	5	3	---
Potassium	ppm	ASTM D5185m	>20	1	2	---

INFRA-RED		method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844		0.7	---	---
Nitration	Abs/cm	*ASTM D7624		12.6	---	---
Sulfation	Abs/.1mm	*ASTM D7415		24.4	---	---

FLUID DEGRADATION		method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	*ASTM D7414		29.1	---	---

OIL ANALYSIS REPORT

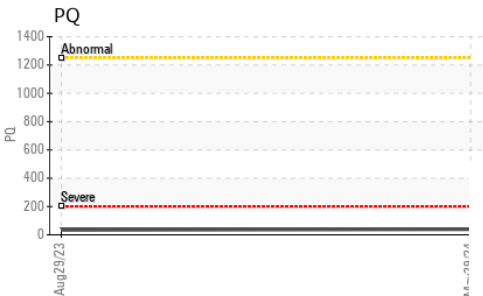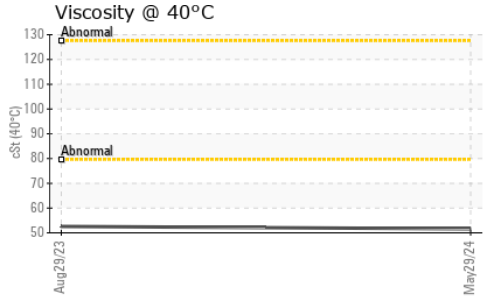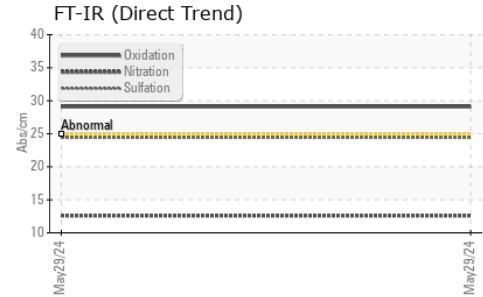





VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	---
Yellow Metal	scalar	*Visual	NONE	NONE	---
Precipitate	scalar	*Visual	NONE	NONE	---
Silt	scalar	*Visual	NONE	NONE	---
Debris	scalar	*Visual	NONE	NONE	---
Sand/Dirt	scalar	*Visual	NONE	NONE	---
Appearance	scalar	*Visual	NORML	NORML	---
Odor	scalar	*Visual	NORML	NORML	---
Emulsified Water	scalar	*Visual	>0.075	NEG	---
Free Water	scalar	*Visual		NEG	---

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D445	51.6	52.6	---

SAMPLE IMAGES	method	limit/base	current	history1	history2
---------------	--------	------------	---------	----------	----------

Color				<i>no image</i>	<i>no image</i>	<i>no image</i>
Bottom				<i>no image</i>	<i>no image</i>	<i>no image</i>

GRAPHS

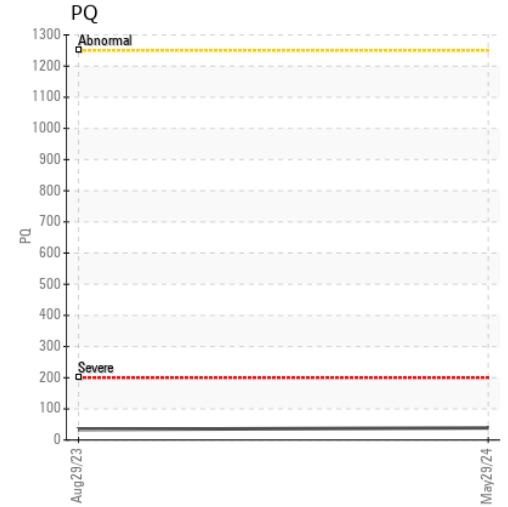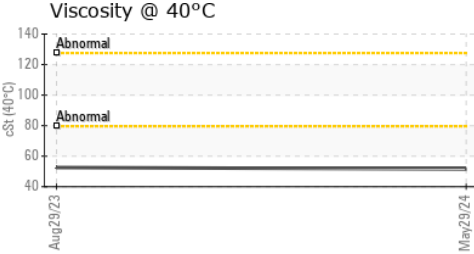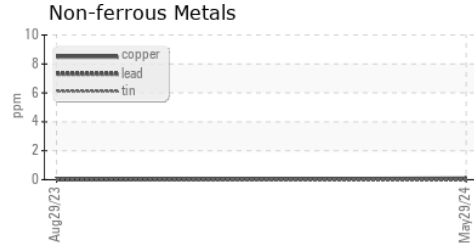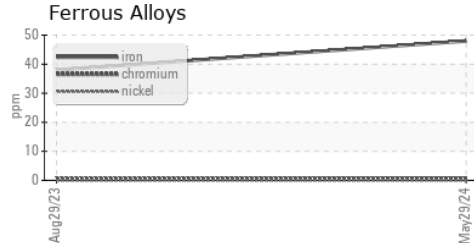

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : JR0212756 **Received** : 03 Jun 2024
Lab Number : **06197933** **Tested** : 04 Jun 2024
Unique Number : 11060056 **Diagnosed** : 04 Jun 2024 - Wes Davis
Test Package : CONST (Additional Tests: FT-IR, PQ)

JRE - ASHLAND
 11047 LEADBETTER RD
 ASHLAND, VA
 US 23005
 Contact: DAVID ZIEG
 dzieg@jamesriverequipment.com
 T: (804)798-6001
 F: (804)798-0292

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)