OIL ANALYSIS REPORT

Sample Rating Trend

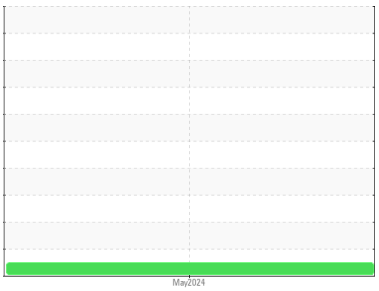

NORMAL

Machine Id
TOTE 152
Component
New (Unused) Oil
Fluid
{not provided} (--- GAL)

DIAGNOSIS

Recommendation
This is a baseline read-out on the submitted sample.

SAMPLE INFORMATION		method	limit/base	current	history1	history2
Sample Number		Client Info		**TLC0001622**	---	---
Sample Date		Client Info		**28 May 2024**	---	---
Machine Age	hrs	Client Info		**0**	---	---
Oil Age	hrs	Client Info		**0**	---	---
Oil Changed		Client Info		**N/A**	---	---
Sample Status				**NORMAL**	---	---

WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>5	**0**	---	---
Chromium	ppm	ASTM D5185m	>5	**0**	---	---
Nickel	ppm	ASTM D5185m	>5	**0**	---	---
Titanium	ppm	ASTM D5185m		**0**	---	---
Silver	ppm	ASTM D5185m	>5	**0**	---	---
Aluminum	ppm	ASTM D5185m	>5	**<1**	---	---
Lead	ppm	ASTM D5185m	>5	**1**	---	---
Copper	ppm	ASTM D5185m	>5	**0**	---	---
Tin	ppm	ASTM D5185m	>5	**0**	---	---
Vanadium	ppm	ASTM D5185m		**<1**	---	---
Cadmium	ppm	ASTM D5185m		**0**	---	---

ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m		**41**	---	---
Barium	ppm	ASTM D5185m		**0**	---	---
Molybdenum	ppm	ASTM D5185m		**58**	---	---
Manganese	ppm	ASTM D5185m		**0**	---	---
Magnesium	ppm	ASTM D5185m		**13**	---	---
Calcium	ppm	ASTM D5185m		**831**	---	---
Phosphorus	ppm	ASTM D5185m		**501**	---	---
Zinc	ppm	ASTM D5185m		**656**	---	---
Sulfur	ppm	ASTM D5185m		**1720**	---	---

CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>15	**2**	---	---
Sodium	ppm	ASTM D5185m		**0**	---	---
Potassium	ppm	ASTM D5185m	>20	**3**	---	---
Water	%	ASTM D6304		**NEG**	---	---

FLUID CLEANLINESS		method	limit/base	current	history1	history2
Particles >4µm		ASTM D7647	>5000	**992**	---	---
Particles >6µm		ASTM D7647	>1300	**174**	---	---
Particles >14µm		ASTM D7647	>160	**3**	---	---
Particles >21µm		ASTM D7647	>40	**1**	---	---
Particles >38µm		ASTM D7647	>10	**0**	---	---
Particles >71µm		ASTM D7647	>3	**0**	---	---
Oil Cleanliness		ISO 4406 (c)	>19/17/14	**17/15/9**	---	---

FLUID DEGRADATION		method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D8045		**0.66**	---	---

OIL ANALYSIS REPORT

Particle Trend

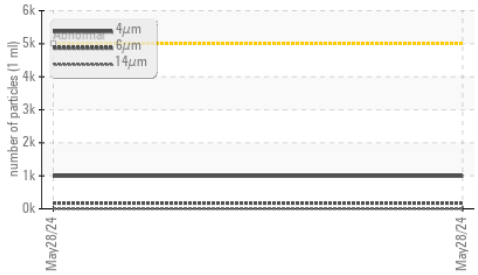

Acid Number

Viscosity @ 40°C

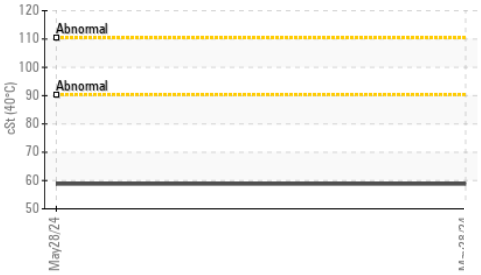

Viscosity @ 100°C

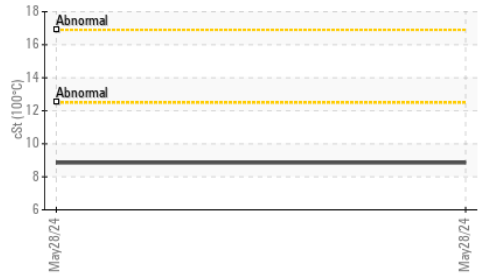

VISUAL		method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	**NONE**	---	---
Yellow Metal	scalar	*Visual	NONE	**NONE**	---	---
Precipitate	scalar	*Visual	NONE	**NONE**	---	---
Silt	scalar	*Visual	NONE	**NONE**	---	---
Debris	scalar	*Visual	NONE	**NONE**	---	---
Sand/Dirt	scalar	*Visual	NONE	**NONE**	---	---
Appearance	scalar	*Visual	NORML	**NORML**	---	---
Odor	scalar	*Visual	NORML	**NORML**	---	---
Emulsified Water	scalar	*Visual		**NEG**	---	---
Free Water	scalar	*Visual		**NEG**	---	---

FLUID PROPERTIES		method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D445		**58.8**	---	---
Visc @ 100°C	cSt	ASTM D445		**8.85**	---	---
Viscosity Index (VI)	Scale	ASTM D2270		**126**	---	---

SAMPLE IMAGES	method	limit/base	current	history1	history2
Color				*no image*	*no image*
Bottom				*no image*	*no image*

GRAPHS

Ferrous Alloys

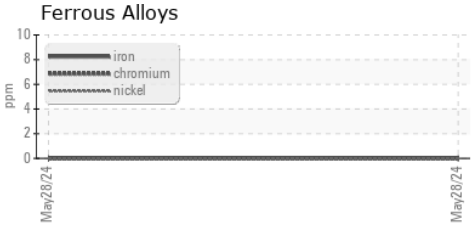

Non-ferrous Metals

Viscosity @ 40°C

Particle Count

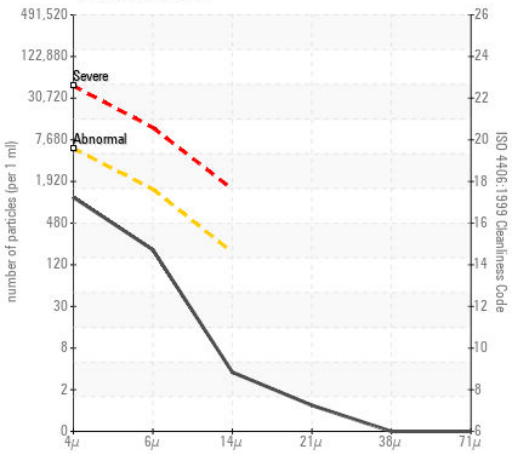

Acid Number

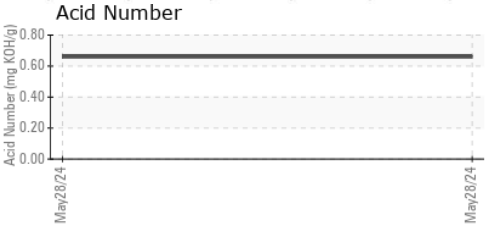

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : TLC0001622 **Received** : 03 Jun 2024
Lab Number : 06198117 **Tested** : 05 Jun 2024
Unique Number : 11060240 **Diagnosed** : 05 Jun 2024 - Jonathan Hester
Test Package : PLANT (Additional Tests: FT-IR, ICP-NewOil, KV100, VI)

Certificate L2367

To discuss this sample report, contact Customer Service at 1-800-237-1369.
** - Denotes test methods that are outside of the ISO 17025 scope of accreditation.*
Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

SUPPLY PRO
115 EMPIRE WAY
ATLANTA, GA
US 30354
Contact: MICHAEL JACKSON
mjackson@supplypro1.com
T: (470)991-1693
F:

Report Id: SUPATLGA [WUSCAR] 06198117 (Generated: 06/06/2024 07:19:34) Rev: 1
Contact/Location: MICHAEL JACKSON - SUPATLGA