



OIL ANALYSIS REPORT

Sample Rating Trend



NORMAL



Area

04

Machine Id

[04] BASELINE - COMPRESSOR LIFE 46

Component

New (Unused) Oil

Fluid

HIGH PERFORMANCE LUBRICANTS COMPRESSOR LIFE 46 (5 GAL)

DIAGNOSIS

Recommendation

This is a baseline read-out on the submitted sample. (Customer Sample Comment: Batch# 22H0401)

SAMPLE INFORMATION		method	limit/base	current	history1	history2
Sample Number	Client Info			HPL0004905	---	---
Sample Date	Client Info			28 May 2024	---	---
Machine Age	hrs	Client Info		0	---	---
Oil Age	hrs	Client Info		0	---	---
Oil Changed	Client Info			N/A	---	---
Sample Status				NORMAL	---	---

CONTAMINATION		method	limit/base	current	history1	history2
Water	WC Method			NEG	---	---




WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m		0	---	---
Chromium	ppm	ASTM D5185m		0	---	---
Nickel	ppm	ASTM D5185m		0	---	---
Titanium	ppm	ASTM D5185m		0	---	---
Silver	ppm	ASTM D5185m		0	---	---
Aluminum	ppm	ASTM D5185m		<1	---	---
Lead	ppm	ASTM D5185m		<1	---	---
Copper	ppm	ASTM D5185m		0	---	---
Tin	ppm	ASTM D5185m		0	---	---
Vanadium	ppm	ASTM D5185m		<1	---	---
Cadmium	ppm	ASTM D5185m		0	---	---

ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m		0	---	---
Barium	ppm	ASTM D5185m		0	---	---
Molybdenum	ppm	ASTM D5185m		0	---	---
Manganese	ppm	ASTM D5185m		0	---	---
Magnesium	ppm	ASTM D5185m		<1	---	---
Calcium	ppm	ASTM D5185m	225	1	---	---
Phosphorus	ppm	ASTM D5185m		203	---	---
Zinc	ppm	ASTM D5185m		3	---	---
Sulfur	ppm	ASTM D5185m	22000	24524	---	---

CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m		<1	---	---
Sodium	ppm	ASTM D5185m		<1	---	---
Potassium	ppm	ASTM D5185m	>20	2	---	---

FLUID DEGRADATION		method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D8045	0.1	0.61	---	---

OIL ANALYSIS REPORT

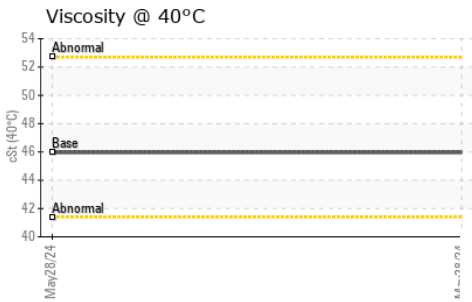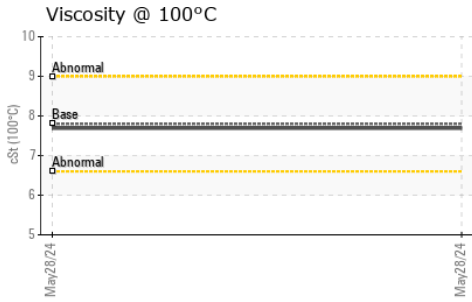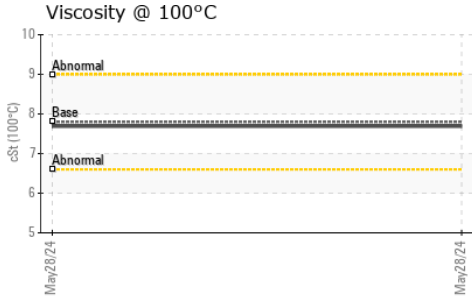




VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	---
Yellow Metal	scalar	*Visual	NONE	NONE	---
Precipitate	scalar	*Visual	NONE	NONE	---
Silt	scalar	*Visual	NONE	NONE	---
Debris	scalar	*Visual	NONE	NONE	---
Sand/Dirt	scalar	*Visual	NONE	NONE	---
Appearance	scalar	*Visual	NORML	NORML	---
Odor	scalar	*Visual	NORML	NORML	---
Emulsified Water	scalar	*Visual	NEG	---	---
Free Water	scalar	*Visual	NEG	---	---

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D445	46	45.96	---
Visc @ 100°C	cSt	ASTM D445	7.8	7.69	---
Viscosity Index (VI)	Scale	ASTM D2270	137	135	---

SAMPLE IMAGES

	method	limit/base	current	history1	history2
Color					
Bottom					

GRAPHS

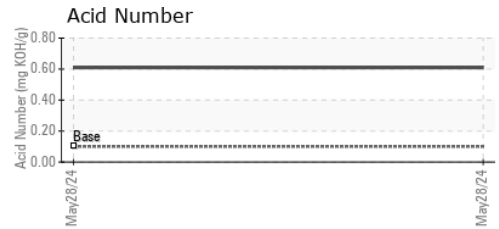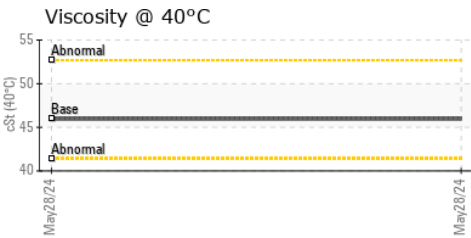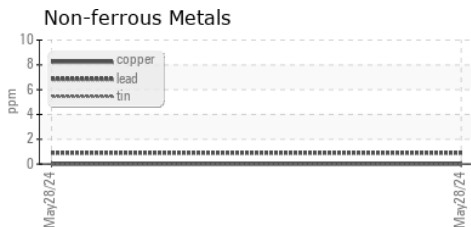

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : HPL0004905 **Received** : 03 Jun 2024
Lab Number : **06198131** **Tested** : 05 Jun 2024
Unique Number : 11060254 **Diagnosed** : 05 Jun 2024 - Jonathan Hester
Test Package : MOB 2 (Additional Tests: FT-IR, ICP-NewOil, KV100, PrtCount, VI)

KENSING
 2525 S KENSINGTON RD
 KANKAKEE, IL
 US 60901

To discuss this sample report, contact Customer Service at 1-800-237-1369.

Contact: TIM HUBERT
timothy.hubert@kensingolutions.com

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

T: (815)939-8918

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

F: x: