




OIL ANALYSIS REPORT

Sample Rating Trend

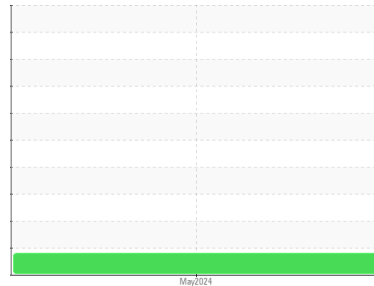

ISO



Area

[1368]

Machine Id

BALEMASTER 4025G-8 KH UNICORR (S/N 97047)

Component

Hydraulic System

Fluid

{not provided} (--- GAL)

DIAGNOSIS

Recommendation

The filter change at the time of sampling has been noted. We recommend an early resample to monitor this condition. NOTE: Please provide information regarding reservoir capacity, filter type and micron rating with next sample. Please specify the brand, type, and viscosity of the oil on your next sample.

Wear

All component wear rates are normal.

Contamination

There is a moderate amount of silt (particulates < 14 microns in size) present in the oil. The system cleanliness is above the acceptable limit for the target ISO 4406 cleanliness code.

Fluid Condition

The AN level is acceptable for this fluid. The oil is still serviceable provided that the contaminant(s) can be reduced to acceptable levels.

SAMPLE INFORMATION

| method | limit/base | current | history1 | history2 |
|---------------|-------------|-------------|----------|----------|
| Sample Number | Client Info | WC0911545 | --- | --- |
| Sample Date | Client Info | 29 May 2024 | --- | --- |
| Machine Age | hrs | Client Info | 0 | --- |
| Oil Age | hrs | Client Info | 0 | --- |
| Oil Changed | Client Info | Filtered | --- | --- |
| Sample Status | | ABNORMAL | --- | --- |

CONTAMINATION

| method | limit/base | current | history1 | history2 |
|--------|------------|---------|----------|----------|
| Water | WC Method | >0.05 | NEG | --- |

WEAR METALS

| method | limit/base | current | history1 | history2 | |
|----------|------------|-------------|----------|----------|-----|
| Iron | ppm | ASTM D5185m | >20 | 7 | --- |
| Chromium | ppm | ASTM D5185m | >20 | <1 | --- |
| Nickel | ppm | ASTM D5185m | >20 | 0 | --- |
| Titanium | ppm | ASTM D5185m | | <1 | --- |
| Silver | ppm | ASTM D5185m | | 0 | --- |
| Aluminum | ppm | ASTM D5185m | >20 | 1 | --- |
| Lead | ppm | ASTM D5185m | >20 | <1 | --- |
| Copper | ppm | ASTM D5185m | >20 | 18 | --- |
| Tin | ppm | ASTM D5185m | >20 | <1 | --- |
| Vanadium | ppm | ASTM D5185m | | 0 | --- |
| Cadmium | ppm | ASTM D5185m | | <1 | --- |

ADDITIVES

| method | limit/base | current | history1 | history2 | |
|------------|------------|-------------|----------|----------|-----|
| Boron | ppm | ASTM D5185m | | 4 | --- |
| Barium | ppm | ASTM D5185m | | 0 | --- |
| Molybdenum | ppm | ASTM D5185m | | 4 | --- |
| Manganese | ppm | ASTM D5185m | | 0 | --- |
| Magnesium | ppm | ASTM D5185m | | 8 | --- |
| Calcium | ppm | ASTM D5185m | | 535 | --- |
| Phosphorus | ppm | ASTM D5185m | | 446 | --- |
| Zinc | ppm | ASTM D5185m | | 489 | --- |
| Sulfur | ppm | ASTM D5185m | | 5757 | --- |

CONTAMINANTS

| method | limit/base | current | history1 | history2 | |
|-----------|------------|-------------|----------|----------|-----|
| Silicon | ppm | ASTM D5185m | >15 | 9 | --- |
| Sodium | ppm | ASTM D5185m | | 0 | --- |
| Potassium | ppm | ASTM D5185m | >20 | 3 | --- |

FLUID CLEANLINESS





| method | limit/base | current | history1 | history2 | |
|-----------------|--------------|-----------|----------|----------|-----|
| Particles >4µm | ASTM D7647 | | | 73551 | --- |
| Particles >6µm | ASTM D7647 | >5000 | | 12387 | --- |
| Particles >14µm | ASTM D7647 | >640 | | 146 | --- |
| Particles >21µm | ASTM D7647 | >160 | | 37 | --- |
| Particles >38µm | ASTM D7647 | >40 | | 2 | --- |
| Particles >71µm | ASTM D7647 | >10 | | 0 | --- |
| Oil Cleanliness | ISO 4406 (c) | >--/19/16 | | 23/21/14 | --- |

FLUID DEGRADATION

| method | limit/base | current | history1 | history2 | |
|------------------|------------|------------|----------|----------|-----|
| Acid Number (AN) | mg KOH/g | ASTM D8045 | | 0.35 | --- |



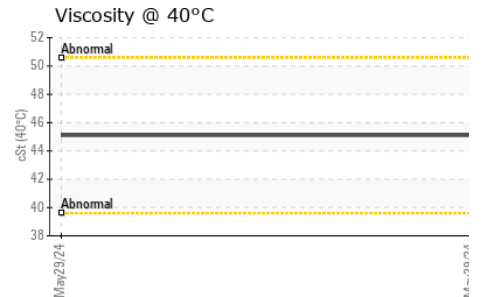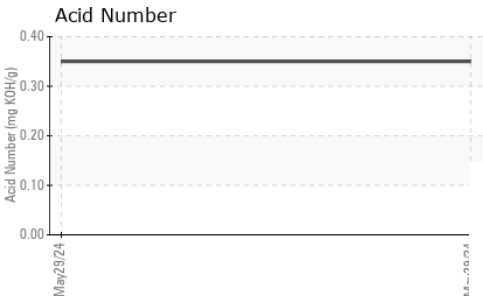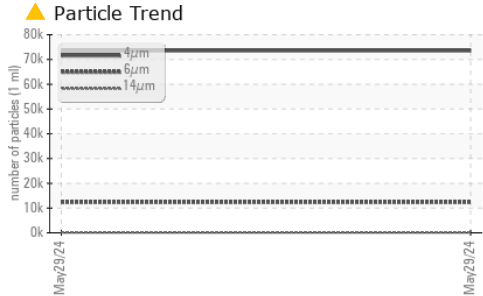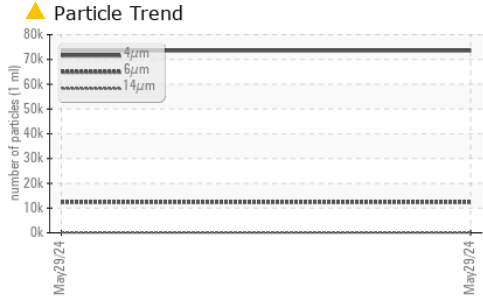

OIL ANALYSIS REPORT








| VISUAL | method | limit/base | current | history1 | history2 | |
|------------------|--------|------------|---------|----------|----------|-----|
| White Metal | scalar | *Visual | NONE | NONE | --- | --- |
| Yellow Metal | scalar | *Visual | NONE | NONE | --- | --- |
| Precipitate | scalar | *Visual | NONE | NONE | --- | --- |
| Silt | scalar | *Visual | NONE | NONE | --- | --- |
| Debris | scalar | *Visual | NONE | NONE | --- | --- |
| Sand/Dirt | scalar | *Visual | NONE | NONE | --- | --- |
| Appearance | scalar | *Visual | NORML | NORML | --- | --- |
| Odor | scalar | *Visual | NORML | NORML | --- | --- |
| Emulsified Water | scalar | *Visual | >0.05 | NEG | --- | --- |
| Free Water | scalar | *Visual | | NEG | --- | --- |

| FLUID PROPERTIES | method | limit/base | current | history1 | history2 |
|------------------|--------|------------|---------|----------|----------|
| Visc @ 40°C | cSt | ASTM D445 | 45.1 | --- | --- |

| SAMPLE IMAGES | method | limit/base | current | history1 | history2 |
|---------------|--------|------------|---------|----------|----------|
|---------------|--------|------------|---------|----------|----------|

| | | | | | |
|--------|--|--|-------------------------------------------------------------------------------------|----------|----------|
| Color | | |  | no image | no image |
| Bottom | | |  | no image | no image |

GRAPHS

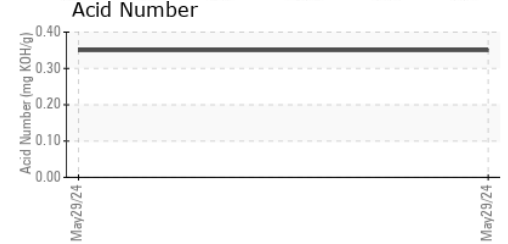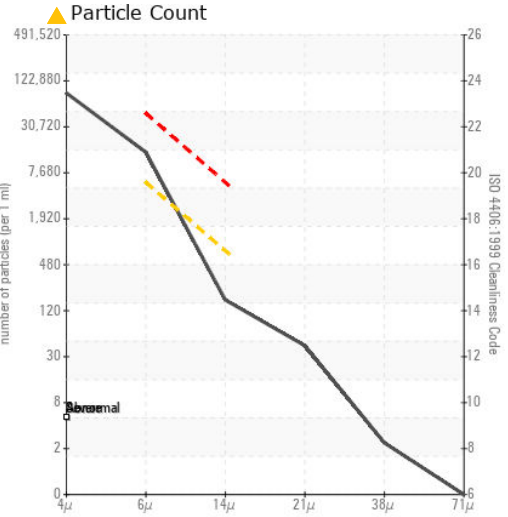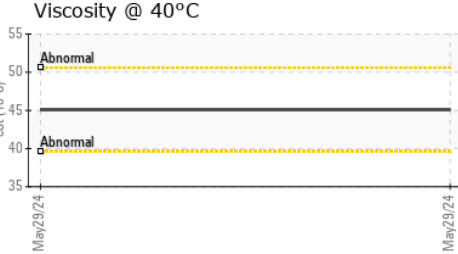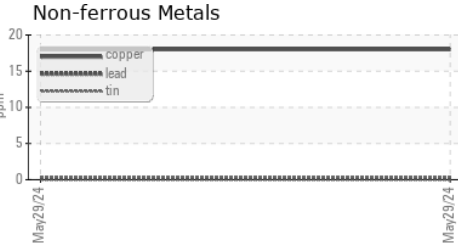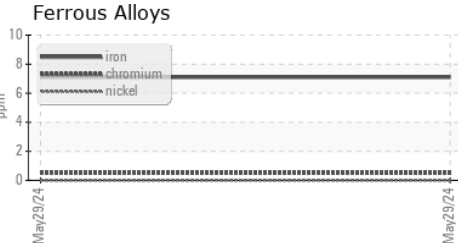

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : WC0911545 **Received** : 03 Jun 2024
Lab Number : 06198177 **Tested** : 05 Jun 2024
Unique Number : 11060300 **Diagnosed** : 05 Jun 2024 - Wes Davis
Test Package : IND 2

ADVANCED EQUIPMENT SALES
 535 HAGEY RD
 SOUDERTON, PA
 US 18964
 Contact: JEFF BURNLEY
 jburnley@aesales.net
 T: (215)723-7200
 F: (215)723-7201

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)