


OIL ANALYSIS REPORT

Machine Id

KAESER AIRTOWER 7.5C 5961242 (S/N 1661)

Compressor

KAESER SIGMA (OEM) S-460 (--- QTS)

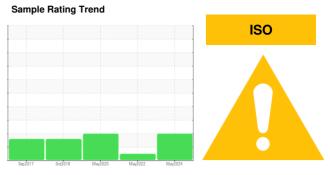

DIAGNOSIS

Recommendation

We recommend you service the filters on this component. Resample at the next service interval to monitor.

All component wear rates are normal.

Contamination

There is a high amount of particulates present in the oil.


Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

SAMPLE INFORM	MATION	method	limit/base	current	history1	history2
Sample Number		Client Info		KCPA012969	KCP50915	KCP24079
Sample Date		Client Info		23 May 2024	26 May 2022	08 May 2020
Machine Age	hrs	Client Info		3428	2813	1932
Oil Age	hrs	Client Info		3428	900	300
Oil Changed		Client Info		N/A	Changed	Changed
Sample Status				ABNORMAL	NORMAL	ABNORMAL
WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>50	<1	<1	<1
Chromium	ppm	ASTM D5185m	>10	<1	0	0
Nickel	ppm	ASTM D5185m	>3	<1	0	0
Titanium	ppm	ASTM D5185m	>3	<1	0	0
Silver	ppm	ASTM D5185m	>2	0	0	0
Aluminum	ppm	ASTM D5185m	>10	1	<1	<1
Lead	ppm	ASTM D5185m	>10	<1	0	0
Copper	ppm	ASTM D5185m	>50	12	15	18
Tin	ppm	ASTM D5185m	>10	<1	0	0
Antimony	ppm	ASTM D5185m				0
Vanadium	ppm	ASTM D5185m		0	0	0
Cadmium	ppm	ASTM D5185m		<1	0	0
ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m		0	2	0
Barium	ppm	ASTM D5185m	90	0	<1	<1
Molybdenum	ppm	ASTM D5185m		0	0	<1
Manganese	ppm	ASTM D5185m		0	0	0
Magnesium	ppm	ASTM D5185m	90	18	12	13
Calcium	ppm	ASTM D5185m	2	0	0	<1
Phosphorus	ppm	ASTM D5185m		2	0	2
Zinc	ppm	ASTM D5185m		29	49	70
Sulfur	10 10 100				10100	
Gullul	ppm	ASTM D5185m		24214	18432	20431
CONTAMINANTS		ASTM D5185m method	limit/base	24214 current	18432 history1	20431 history2
CONTAMINANTS			limit/base >25			
CONTAMINANTS Silicon	; ;	method		current	history1	history2
CONTAMINANTS Silicon Sodium	ppm	method ASTM D5185m		current	history1	history2
CONTAMINANTS Silicon Sodium Potassium	ppm	method ASTM D5185m ASTM D5185m	>25	current <1 4	history1 2 5	history2 2 3
CONTAMINANTS Silicon Sodium Potassium Water	ppm ppm	method ASTM D5185m ASTM D5185m ASTM D5185m	>25 >20	current <1 4 1	history1 2 5 0	history2 2 3 0
CONTAMINANTS Silicon Sodium Potassium Water	ppm ppm ppm ppm	method ASTM D5185m ASTM D5185m ASTM D5185m ASTM D6304	>25 >20 >0.05	current <1 4 1 0.023	history1 2 5 0 0.012	history2 2 3 0 0.014
CONTAMINANTS Silicon Sodium Potassium Water ppm Water FLUID CLEANLIN	ppm ppm ppm ppm	method ASTM D5185m ASTM D5185m ASTM D5185m ASTM D6304 ASTM D6304	>25 >20 >0.05 >500	current <1 4 1 0.023 231	history1 2 5 0 0.012 123.9	history2 2 3 0 0.014 145.0
CONTAMINANTS Silicon Sodium Potassium Water ppm Water FLUID CLEANLIN Particles >4µm	ppm ppm ppm ppm	method ASTM D5185m ASTM D5185m ASTM D5185m ASTM D6304 ASTM D6304 method	>25 >20 >0.05 >500 limit/base	current <1 4 1 0.023 231 current	history1 2 5 0 0.012 123.9 history1	history2 2 3 0 0.014 145.0 history2
CONTAMINANTS Silicon Sodium Potassium Water ppm Water FLUID CLEANLIN Particles >4µm Particles >6µm	ppm ppm ppm ppm	method ASTM D5185m ASTM D5185m ASTM D5185m ASTM D6304 ASTM D6304 method ASTM D7647	>25 >20 >0.05 >500 limit/base	current <1 4 1 0.023 231 current 62122	history1 2 5 0 0.012 123.9 history1 933	history2 2 3 0 0.014 145.0 history2 13470
CONTAMINANTS Silicon Sodium Potassium Water ppm Water FLUID CLEANLIN Particles >4µm Particles >6µm Particles >14µm	ppm ppm ppm ppm	method ASTM D5185m ASTM D5185m ASTM D5185m ASTM D6304 ASTM D6304 method ASTM D7647 ASTM D7647	>25 >20 >0.05 >500 limit/base >1300	current <1 4 1 0.023 231 current 62122 ▲ 16608	history1 2 5 0 0.012 123.9 history1 933 224	history2 2 3 0 0.014 145.0 history2 13470 3194
CONTAMINANTS Silicon Sodium Potassium Water ppm Water	ppm ppm ppm ppm	method ASTM D5185m ASTM D5185m ASTM D6304 ASTM D6304 ASTM D6304 method ASTM D7647 ASTM D7647 ASTM D7647	>25 >20 >0.05 >500 limit/base >1300 >80	current <1 4 1 0.023 231 current 62122 ▲ 16608 ▲ 1093	history1 2 5 0 0.012 123.9 history1 933 224 21	history2 2 3 0 0.014 145.0 history2 13470 13470 103
CONTAMINANTS Silicon Sodium Potassium Water ppm Water FLUID CLEANLIN Particles >4µm Particles >6µm Particles >14µm Particles >21µm	ppm ppm ppm ppm	method ASTM D5185m ASTM D5185m ASTM D6304 ASTM D6304 Method ASTM D7647 ASTM D7647 ASTM D7647 ASTM D7647	>25 >20 >0.05 >500 limit/base >1300 >80 >20	current <1 4 1 0.023 231 current 62122 ▲ 16608 ▲ 1093 ▲ 230	history1 2 5 0 0.012 123.9 history1 933 224 21 9	history2 2 3 0 0.014 145.0 history2 13470 103 31
CONTAMINANTS Silicon Sodium Potassium Water ppm Water FLUID CLEANLIN Particles >6µm Particles >14µm Particles >21µm Particles >38µm	ppm ppm ppm ppm	method ASTM D5185m ASTM D5185m ASTM D6304 ASTM D6304 Method ASTM D7647 ASTM D7647 ASTM D7647 ASTM D7647 ASTM D7647 ASTM D7647	>25 >20 >0.05 >500 limit/base >1300 >80 >20 >4	current <1 4 1 0.023 231 current 62122 ▲ 16608 ▲ 1093 ▲ 230 ▲ 10	history1 2 5 0 0.012 123.9 history1 933 224 21 9 1	history2 2 3 0 0.014 145.0 history2 13470 103 31 13



OIL ANALYSIS REPORT

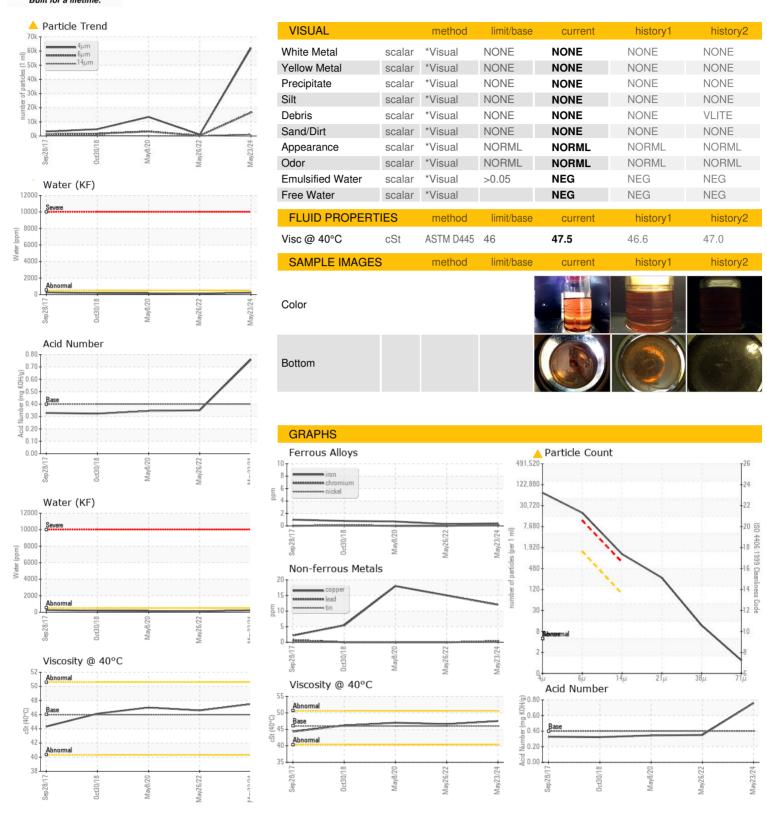





Certificate 12367

Sample No.

Laboratory

Lab Number

: WearCheck USA - 501 Madison Ave., Cary, NC 27513 : KCPA012969

: 06198194 Unique Number: 11060317

Received : 03 Jun 2024 **Tested** : 05 Jun 2024 : 05 Jun 2024 - Don Baldridge

Diagnosed Test Package : IND 2 (Additional Tests: KF, PrtCount)

To discuss this sample report, contact Customer Service at 1-800-237-1369. st - Denotes test methods that are outside of the ISO 17025 scope of accreditation. Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

YOUNGS PLANT FARM

863 AIRPORT RD AUBURN, AL US 36830 Contact: STUART

stuart@youngsplantfarm.com T:

F: Contact/Location: STUART ? - YOUAUB