


OIL ANALYSIS REPORT

Sample Rating Trend







RW5-MIB
Component
Gearbox
Fluid

{not provided} (--- QTS)

DIAGNOSIS

Machine Id

Recommendation

Resample at the next service interval to monitor. Please specify the brand, type, and viscosity of the oil on your next sample.

Wear

All component wear rates are normal.

Contamination

There is no indication of any contamination in the oil.

Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

| | | | | May2024 | | |
|---------------|--------|-------------|------------|-------------|----------|----------|
| SAMPLE INFORM | MATION | method | limit/base | current | history1 | history2 |
| Sample Number | | Client Info | | WC0935380 | | |
| Sample Date | | Client Info | | 06 May 2024 | | |
| Machine Age | hrs | Client Info | | 0 | | |
| Oil Age | hrs | Client Info | | 0 | | |
| Oil Changed | | Client Info | | N/A | | |
| Sample Status | | | | NORMAL | | |
| CONTAMINATION | V | method | limit/base | current | history1 | history2 |
| Water | | WC Method | >0.2 | NEG | | |
| WEAR METALS | | method | limit/base | current | history1 | history2 |
| Iron | ppm | ASTM D5185m | >200 | 2 | | |
| Chromium | ppm | ASTM D5185m | >15 | <1 | | |
| Nickel | ppm | ASTM D5185m | >15 | <1 | | |
| Titanium | ppm | ASTM D5185m | | <1 | | |
| Silver | ppm | ASTM D5185m | | 0 | | |
| Aluminum | ppm | ASTM D5185m | >25 | 2 | | |
| Lead | ppm | ASTM D5185m | >100 | <1 | | |
| Copper | ppm | ASTM D5185m | >200 | 6 | | |
| Tin | ppm | ASTM D5185m | >25 | <1 | | |
| Vanadium | ppm | ASTM D5185m | | <1 | | |
| Cadmium | ppm | ASTM D5185m | | <1 | | |
| ADDITIVES | | method | limit/base | current | history1 | history2 |
| Boron | ppm | ASTM D5185m | | 0 | | |
| Barium | ppm | ASTM D5185m | | 0 | | |
| Molybdenum | ppm | ASTM D5185m | | <1 | | |
| Manganese | ppm | ASTM D5185m | | 0 | | |
| Magnesium | ppm | ASTM D5185m | | 20 | | |
| Calcium | ppm | ASTM D5185m | | 5 | | |
| Phosphorus | ppm | ASTM D5185m | | 20 | | |
| Zinc | ppm | ASTM D5185m | | 5 | | |
| Sulfur | ppm | ASTM D5185m | | 15686 | | |
| CONTAMINANTS | ; | method | limit/base | current | history1 | history2 |
| Silicon | ppm | ASTM D5185m | >50 | 1 | | |
| Sodium | ppm | ASTM D5185m | | <1 | | |
| Potassium | ppm | ASTM D5185m | >20 | 2 | | |
| FLUID DEGRADA | ATION | method | limit/base | current | history1 | history2 |
| | | | | | | |


0.45


Acid Number (AN)

mg KOH/g ASTM D8045





OIL ANALYSIS REPORT

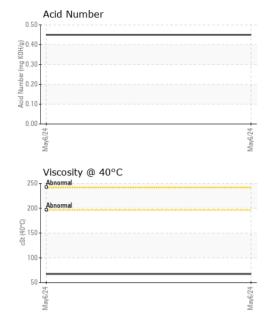


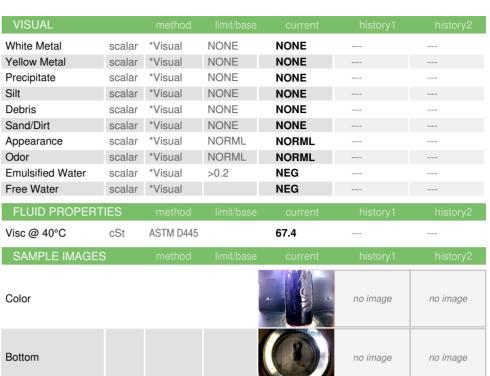


GRAPHS







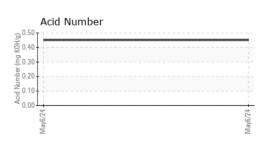





Laboratory Sample No.

Lab Number : 06198312

: WC0935380 Unique Number : 11060435

: WearCheck USA - 501 Madison Ave., Cary, NC 27513

Received : 03 Jun 2024 **Tested** : 04 Jun 2024 Diagnosed : 05 Jun 2024 - Jonathan Hester

1170 ATLANTA INDUSTRIAL DR MARIETTA, GA

COBB CO MARIETTA WATER AUTHORITY

US 30066 Contact: Bobby Fields bfields@ccmwa.org

Test Package : IND 2 Certificate 12367 To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation. Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

Report Id: COBMARRP [WUSCAR] 06198312 (Generated: 06/05/2024 16:23:33) Rev: 1

Contact/Location: Bobby Fields - COBMARRP

T:

F: