




# OIL ANALYSIS REPORT

Sample Rating Trend

**NORMAL**

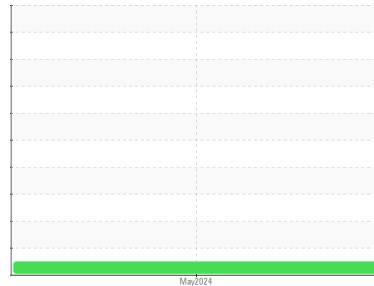

Area  
**[W02008357]**  
 Machine Id  
**VOLVO A30G 752288**  
 Component  
**Bogie/Center Axle**  
 Fluid  
**{not provided} (11 GAL)**



## DIAGNOSIS

**Recommendation**  
 Resample at the next service interval to monitor. Please specify the brand, type, and viscosity of the oil on your next sample. ( Customer Sample Comment: W02008357 )

**Wear**  
 All component wear rates are normal.

**Contamination**  
 There is no indication of any contamination in the oil.

**Fluid Condition**  
 The condition of the oil is acceptable for the time in service.

## SAMPLE INFORMATION

|               | method      | limit/base  | current            | history1 | history2 |
|---------------|-------------|-------------|--------------------|----------|----------|
| Sample Number | Client Info |             | <b>ML0002519</b>   | ---      | ---      |
| Sample Date   | Client Info |             | <b>31 May 2024</b> | ---      | ---      |
| Machine Age   | hrs         | Client Info | <b>4501</b>        | ---      | ---      |
| Oil Age       | hrs         | Client Info | <b>2000</b>        | ---      | ---      |
| Oil Changed   | Client Info |             | <b>Changed</b>     | ---      | ---      |
| Sample Status |             |             | <b>NORMAL</b>      | ---      | ---      |

## CONTAMINATION

|       | method    | limit/base | current    | history1 | history2 |
|-------|-----------|------------|------------|----------|----------|
| Water | WC Method | >0.2       | <b>NEG</b> | ---      | ---      |

## WEAR METALS

|          | method | limit/base       | current      | history1 | history2 |
|----------|--------|------------------|--------------|----------|----------|
| Iron     | ppm    | ASTM D5185m >900 | <b>225</b>   | ---      | ---      |
| Chromium | ppm    | ASTM D5185m >20  | <b>4</b>     | ---      | ---      |
| Nickel   | ppm    | ASTM D5185m >10  | <b>3</b>     | ---      | ---      |
| Titanium | ppm    | ASTM D5185m      | <b>&lt;1</b> | ---      | ---      |
| Silver   | ppm    | ASTM D5185m      | <b>0</b>     | ---      | ---      |
| Aluminum | ppm    | ASTM D5185m >30  | <b>1</b>     | ---      | ---      |
| Lead     | ppm    | ASTM D5185m >50  | <b>&lt;1</b> | ---      | ---      |
| Copper   | ppm    | ASTM D5185m >150 | <b>56</b>    | ---      | ---      |
| Tin      | ppm    | ASTM D5185m >20  | <b>3</b>     | ---      | ---      |
| Vanadium | ppm    | ASTM D5185m      | <b>&lt;1</b> | ---      | ---      |
| Cadmium  | ppm    | ASTM D5185m      | <b>&lt;1</b> | ---      | ---      |

## ADDITIVES

|            | method | limit/base  | current      | history1 | history2 |
|------------|--------|-------------|--------------|----------|----------|
| Boron      | ppm    | ASTM D5185m | <b>174</b>   | ---      | ---      |
| Barium     | ppm    | ASTM D5185m | <b>4</b>     | ---      | ---      |
| Molybdenum | ppm    | ASTM D5185m | <b>6</b>     | ---      | ---      |
| Manganese  | ppm    | ASTM D5185m | <b>10</b>    | ---      | ---      |
| Magnesium  | ppm    | ASTM D5185m | <b>8</b>     | ---      | ---      |
| Calcium    | ppm    | ASTM D5185m | <b>706</b>   | ---      | ---      |
| Phosphorus | ppm    | ASTM D5185m | <b>1506</b>  | ---      | ---      |
| Zinc       | ppm    | ASTM D5185m | <b>350</b>   | ---      | ---      |
| Sulfur     | ppm    | ASTM D5185m | <b>24261</b> | ---      | ---      |


## CONTAMINANTS

|           | method | limit/base      | current  | history1 | history2 |
|-----------|--------|-----------------|----------|----------|----------|
| Silicon   | ppm    | ASTM D5185m >50 | <b>3</b> | ---      | ---      |
| Sodium    | ppm    | ASTM D5185m     | <b>0</b> | ---      | ---      |
| Potassium | ppm    | ASTM D5185m >20 | <b>4</b> | ---      | ---      |

## VISUAL

|                  | method | limit/base    | current      | history1 | history2 |
|------------------|--------|---------------|--------------|----------|----------|
| White Metal      | scalar | *Visual NONE  | <b>NONE</b>  | ---      | ---      |
| Yellow Metal     | scalar | *Visual NONE  | <b>NONE</b>  | ---      | ---      |
| Precipitate      | scalar | *Visual NONE  | <b>NONE</b>  | ---      | ---      |
| Silt             | scalar | *Visual NONE  | <b>LIGHT</b> | ---      | ---      |
| Debris           | scalar | *Visual NONE  | <b>NONE</b>  | ---      | ---      |
| Sand/Dirt        | scalar | *Visual NONE  | <b>NONE</b>  | ---      | ---      |
| Appearance       | scalar | *Visual NORML | <b>NORML</b> | ---      | ---      |
| Odor             | scalar | *Visual NORML | <b>NORML</b> | ---      | ---      |
| Emulsified Water | scalar | *Visual >0.2  | <b>NEG</b>   | ---      | ---      |
| Free Water       | scalar | *Visual       | <b>NEG</b>   | ---      | ---      |




# OIL ANALYSIS REPORT

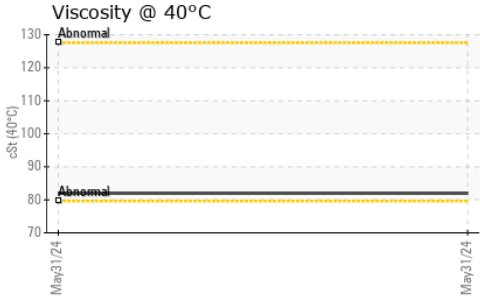

| FLUID PROPERTIES | method | limit/base | current     | history1 | history2 |
|------------------|--------|------------|-------------|----------|----------|
| Visc @ 40°C      | cSt    | ASTM D445  | <b>82.0</b> | ---      | ---      |

| SAMPLE IMAGES | method | limit/base | current  | history1 | history2 |
|---------------|--------|------------|----------|----------|----------|
| Color         |        |            | no image | no image | no image |
| Bottom        |        |            | no image | no image | no image |

## GRAPHS

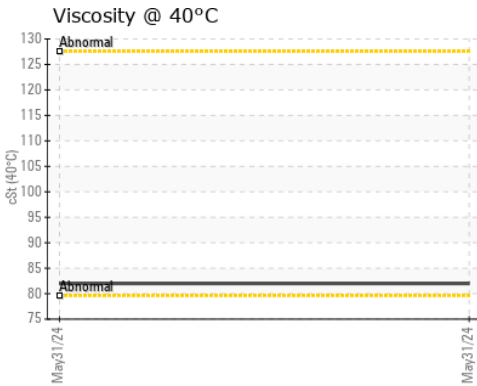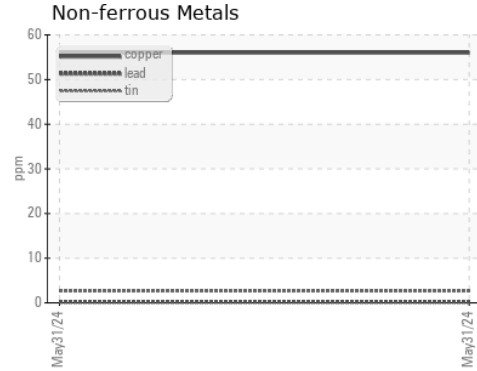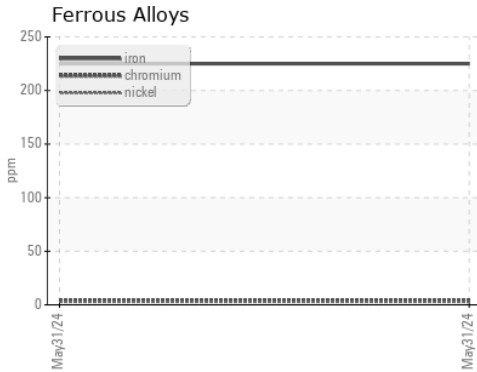

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : ML0002519      **Received** : 03 Jun 2024  
**Lab Number** : **06198386**      **Tested** : 04 Jun 2024  
**Unique Number** : 11060509      **Diagnosed** : 05 Jun 2024 - Sean Felton  
**Test Package** : CONST

**WILLIAM HAZEL**  
 PO BOX 600  
 CHANTILLY, VA  
 US 20153

Contact: SERVICE MANAGER  
 jimmy\_elswick@wahazel.com  
 T: (703)378-8300

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

F: