



OIL ANALYSIS REPORT

Sample Rating Trend



VISCOSITY



Machine Id
VOLVO EC250E 314204
 Component
Rear Left Final Drive
 Fluid
VOLVO SUPER GEAR OIL 75W-80-GO102 (--- GAL)

DIAGNOSIS

Recommendation

The oil change at the time of sampling has been noted. Resample at the next service interval to monitor.

Wear

Metal levels are typical for a new component breaking in.

Contamination

There is no indication of any contamination in the oil.

Fluid Condition

The oil viscosity is higher than normal. This plus the additive levels indicates the addition of a different brand, or type of oil. Confirm oil type.

SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		ML0002807	---	---
Sample Date	Client Info		29 May 2024	---	---
Machine Age	hrs	Client Info	2065	---	---
Oil Age	hrs	Client Info	1000	---	---
Oil Changed	Client Info		Changed	---	---
Sample Status			ATTENTION	---	---

CONTAMINATION

	method	limit/base	current	history1	history2
Water	WC Method	>0.2	NEG	---	---

WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>500	490	---
Chromium	ppm	ASTM D5185m	>10	10	---
Nickel	ppm	ASTM D5185m	>10	<1	---
Titanium	ppm	ASTM D5185m		<1	---
Silver	ppm	ASTM D5185m		0	---
Aluminum	ppm	ASTM D5185m	>25	7	---
Lead	ppm	ASTM D5185m	>25	<1	---
Copper	ppm	ASTM D5185m	>50	1	---
Tin	ppm	ASTM D5185m	>10	<1	---
Vanadium	ppm	ASTM D5185m		<1	---
Cadmium	ppm	ASTM D5185m		<1	---

ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m		0	---
Barium	ppm	ASTM D5185m		<1	---
Molybdenum	ppm	ASTM D5185m		1	---
Manganese	ppm	ASTM D5185m		7	---
Magnesium	ppm	ASTM D5185m		2	---
Calcium	ppm	ASTM D5185m		0	---
Phosphorus	ppm	ASTM D5185m		272	---
Zinc	ppm	ASTM D5185m		26	---
Sulfur	ppm	ASTM D5185m		15567	---



CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>75	37	---
Sodium	ppm	ASTM D5185m		1	---
Potassium	ppm	ASTM D5185m	>20	4	---

VISUAL

	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	---
Yellow Metal	scalar	*Visual	NONE	NONE	---
Precipitate	scalar	*Visual	NONE	NONE	---
Silt	scalar	*Visual	NONE	MODER	---
Debris	scalar	*Visual	NONE	NONE	---
Sand/Dirt	scalar	*Visual	NONE	NONE	---
Appearance	scalar	*Visual	NORML	NORML	---
Odor	scalar	*Visual	NORML	NORML	---
Emulsified Water	scalar	*Visual	>0.2	NEG	---
Free Water	scalar	*Visual		NEG	---

OIL ANALYSIS REPORT

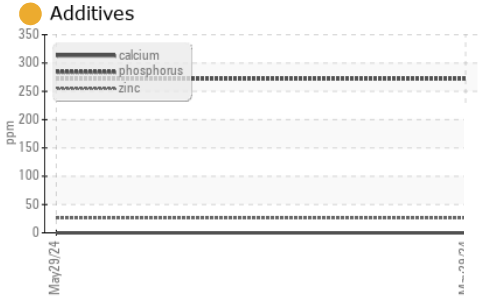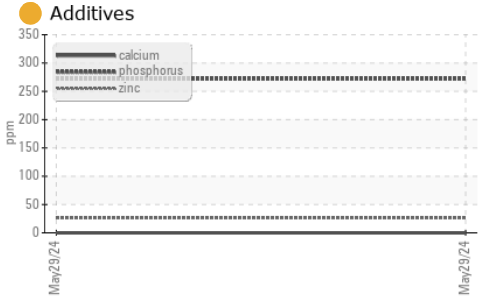




FLUID PROPERTIES

method	limit/base	current	history1	history2
Visc @ 40°C	cSt ASTM D445	● 171	---	---

SAMPLE IMAGES

method	limit/base	current	history1	history2
Color			no image	no image
Bottom			no image	no image

GRAPHS

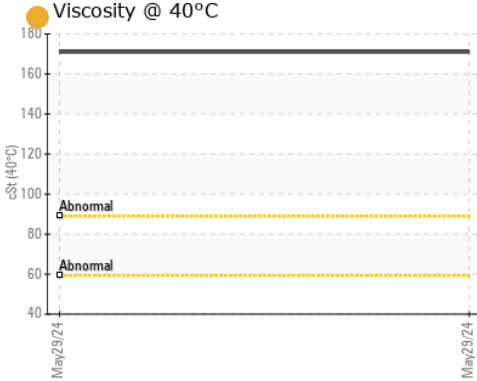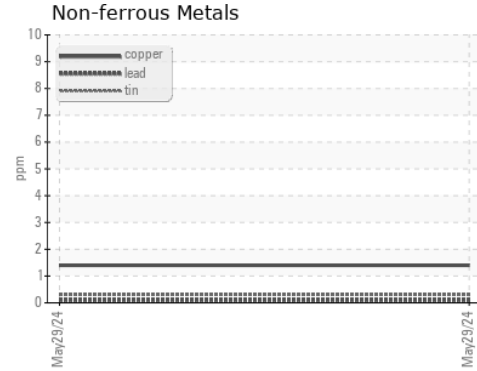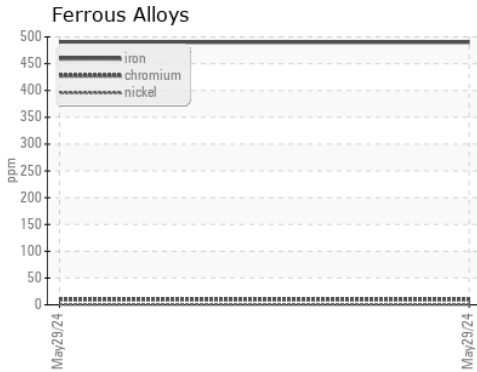

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : ML0002807
Lab Number : 06198409
Unique Number : 11060532
Test Package : CONST

Received : 03 Jun 2024
Tested : 04 Jun 2024
Diagnosed : 05 Jun 2024 - Don Baldrige

McCLUNG-LOGAN EQUIPMENT CO - RICHMOND
 1345 MOUNTAIN ROAD
 GLEN ALLEN, VA
 US 23060

Contact: Alex Anderson
 aanderson@mcclung-logan.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

F: (804)266-1611