


OIL ANALYSIS REPORT

MINING Machine Id

ME-56 VOLVO L350F ME-56

Diesel Engine

SHELL RIMULA SUPER SAE 15W40 (--- GAL)





DIAGNOSIS

Recommendation

Resample at the next service interval to monitor.

Wear

Metal levels are typical for a new component breaking in.

Contamination

There is no indication of any contamination in the oil


Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

| SAMPLE INFORMATION method limit/base current history Sample Number Client Info WC0939952 Sample Date Client Info 29 May 2024 Machine Age hrs Client Info 11775 Oil Age hrs Client Info 550 Oil Changed Client Info Changed Sample Status NORMAL CONTAMINATION method limit/base current history Fuel WC Method >6.0 <1.0 Water WC Method >0.1 NEG Glycol WC Method NEG WEAR METALS method limit/base current history Chromium ppm ASTM D5185m >10 0 Nickel ppm ASTM D5185m >10 0 Titanium ppm ASTM D5185m 0 | ory1 history2 |
|--|--|
| Sample Date Client Info 29 May 2024 Machine Age hrs Client Info 11775 Oil Age hrs Client Info 550 Oil Changed Client Info Changed Sample Status NORMAL CONTAMINATION method limit/base current histo Fuel WC Method >6.0 <1.0 Water WC Method >0.1 NEG Glycol WC Method NEG WEAR METALS method limit/base current histo Iron ppm ASTM D5185m >100 0 Nickel ppm ASTM D5185m >10 0 | ory1 history2 ory1 history2 |
| Machine Age hrs Client Info 11775 Oil Age hrs Client Info 550 Oil Changed Client Info Changed Sample Status NORMAL CONTAMINATION method limit/base current histo Fuel WC Method >6.0 <1.0 | ory1 history2 ory1 history2 |
| Oil Age hrs Client Info 550 Oil Changed Client Info Changed Sample Status NORMAL CONTAMINATION method limit/base current history Fuel WC Method >6.0 <1.0 | ory1 history2 ory1 history2 ory1 history2 |
| Oil Changed Client Info Changed Sample Status NORMAL CONTAMINATION method limit/base current history Fuel WC Method >6.0 <1.0 | ory1 history2 ory1 history2 |
| Sample Status NORMAL CONTAMINATION method limit/base current history Fuel WC Method >6.0 <1.0 | ory1 history2 ory1 history2 |
| CONTAMINATION method limit/base current histor Fuel WC Method >6.0 <1.0 | ory1 history2 ory1 history2 |
| Fuel WC Method >6.0 <1.0 Water WC Method >0.1 NEG Glycol WC Method NEG WEAR METALS method limit/base current history Iron ppm ASTM D5185m >100 13 Chromium ppm ASTM D5185m >10 0 Nickel ppm ASTM D5185m >10 0 | ory1 history2 |
| Water WC Method >0.1 NEG Glycol WC Method NEG WEAR METALS method limit/base current history Iron ppm ASTM D5185m >100 13 Chromium ppm ASTM D5185m >10 0 Nickel ppm ASTM D5185m >10 0 | ory1 history2 |
| Glycol WC Method NEG WEAR METALS method limit/base current history Iron ppm ASTM D5185m >100 13 Chromium ppm ASTM D5185m >10 0 Nickel ppm ASTM D5185m >10 0 | ory1 history2 |
| WEAR METALS method limit/base current history Iron ppm ASTM D5185m >100 13 Chromium ppm ASTM D5185m >10 0 Nickel ppm ASTM D5185m >10 0 | ory1 history2 |
| Iron ppm ASTM D5185m >100 13 Chromium ppm ASTM D5185m >10 0 Nickel ppm ASTM D5185m >10 0 | |
| Chromium ppm ASTM D5185m >10 0 Nickel ppm ASTM D5185m >10 0 | |
| Nickel ppm ASTM D5185m >10 0 | |
| | |
| Titanium ppm ASTM D5185m 0 | |
| | |
| Silver ppm ASTM D5185m >2 0 | |
| Aluminum ppm ASTM D5185m >10 <1 | |
| Lead ppm ASTM D5185m >20 0 | |
| Copper ppm ASTM D5185m >15 0 | |
| Tin ppm ASTM D5185m >10 <1 | |
| Vanadium ppm ASTM D5185m 0 | |
| Cadmium ppm ASTM D5185m 0 | |
| ADDITIVES method limit/base current history | ory1 history2 |
| Boron ppm ASTM D5185m 9 | |
| Barium ppm ASTM D5185m 0 | |
| Molybdenum ppm ASTM D5185m 61 | |
| Manganese ppm ASTM D5185m <1 | |
| Magnesium ppm ASTM D5185m 939 | |
| Calcium ppm ASTM D5185m 2840 1145 | |
| Phosphorus ppm ASTM D5185m 1150 1058 | |
| Zinc ppm ASTM D5185m 1270 1271 | |
| Sulfur ppm ASTM D5185m 2829 3246 | |
| CONTAMINANTS method limit/base current history | ory1 history2 |
| | |
| Silicon ppm ASTM D5185m >20 3 | |
| Silicon ppm ASTM D5185m >20 3 Sodium ppm ASTM D5185m <1 | |
| | |
| Sodium ppm ASTM D5185m <1 | |
| Sodium ppm ASTM D5185m <1 Potassium ppm ASTM D5185m >20 0 | |
| Sodium ppm ASTM D5185m <1 Potassium ppm ASTM D5185m >20 0 INFRA-RED method limit/base current history | ory1 history2 |
| Sodium ppm ASTM D5185m <1 Potassium ppm ASTM D5185m >20 0 INFRA-RED method limit/base current history Soot % *ASTM D7844 >3 0.9 | ory1 history2 |
| Sodium ppm ASTM D5185m <1 Potassium ppm ASTM D5185m >20 0 INFRA-RED method limit/base current histomatical his | ory1 history2 |
| Sodium ppm ASTM D5185m <1 Potassium ppm ASTM D5185m >20 0 INFRA-RED method limit/base current history Soot % % *ASTM D7844 >3 0.9 Nitration Abs/cm *ASTM D7624 >20 9.8 Sulfation Abs/.1mm *ASTM D7415 >30 22.2 | ory1 history2 |



OIL ANALYSIS REPORT

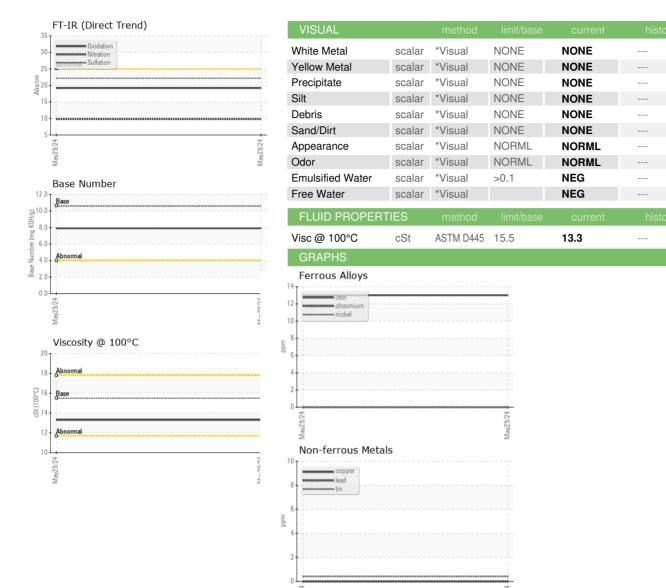





Certificate 12367

Laboratory

Sample No.

Lab Number : 06198580

:St (100°C)

: WC0939952 Unique Number : 11060703

Viscosity @ 100°C

: WearCheck USA - 501 Madison Ave., Cary, NC 27513 Received **Tested** Diagnosed

: 03 Jun 2024 Test Package : CONST (Additional Tests: TBN)

: 04 Jun 2024 : 04 Jun 2024 - Wes Davis

Base Number

10

6.0

0.0

nber (mg KOH/g)

COVIA - OTTAWA -LESUEUR - 008 39770 OTTAWA ROAD LE SUEUR, MN US 56058-4292

Contact: Sam Donner samuel.donner@coviacorp.com T: (507)931-6081

To discuss this sample report, contact Customer Service at 1-800-237-1369. * - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)