




OIL ANALYSIS REPORT

Sample Rating Trend

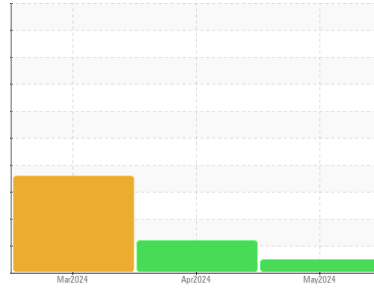

NORMAL



Machine Id
21F150
 Component
Gasoline Engine
 Fluid
AMSOIL AZO 0W30 (--- GAL)

DIAGNOSIS

Recommendation

No corrective action is recommended at this time. Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

There is no indication of any contamination in the oil.

Fluid Condition

The condition of the oil is acceptable for the time in service.

SAMPLE INFORMATION		method	limit/base	current	history1	history2
Sample Number	Client Info			WC0916660	WC0916667	WC0916658
Sample Date	Client Info			29 May 2024	29 Apr 2024	13 Mar 2024
Machine Age	mls	Client Info		112979	107965	102697
Oil Age	mls	Client Info		1541	0	14105
Oil Changed	Client Info			Not Changed	Not Changd	Not Changed
Sample Status				NORMAL	ABNORMAL	ABNORMAL

CONTAMINATION		method	limit/base	current	history1	history2
Fuel	WC Method	>4.0		<1.0	<1.0	<1.0
Water	WC Method	>0.2		NEG	NEG	NEG
Glycol	WC Method			NEG	NEG	NEG

WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>150	4	14	38
Chromium	ppm	ASTM D5185m	>20	0	<1	1
Nickel	ppm	ASTM D5185m	>5	<1	2	<1
Titanium	ppm	ASTM D5185m		0	<1	<1
Silver	ppm	ASTM D5185m	>2	0	0	0
Aluminum	ppm	ASTM D5185m	>40	4	5	13
Lead	ppm	ASTM D5185m	>50	0	0	<1
Copper	ppm	ASTM D5185m	>155	1	3	7
Tin	ppm	ASTM D5185m	>10	0	2	<1
Vanadium	ppm	ASTM D5185m		0	<1	0
Cadmium	ppm	ASTM D5185m		0	1	0

ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m		309	183	30
Barium	ppm	ASTM D5185m		0	0	0
Molybdenum	ppm	ASTM D5185m		192	218	213
Manganese	ppm	ASTM D5185m		<1	1	2
Magnesium	ppm	ASTM D5185m		853	984	905
Calcium	ppm	ASTM D5185m		1159	1431	1273
Phosphorus	ppm	ASTM D5185m		655	753	723
Zinc	ppm	ASTM D5185m		720	890	855
Sulfur	ppm	ASTM D5185m		3550	4225	3148




CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>30	13	24	29
Sodium	ppm	ASTM D5185m	>400	5	7	9
Potassium	ppm	ASTM D5185m	>20	2	4	5

INFRA-RED		method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844		0.1	0.1	0.1
Nitration	Abs/cm	*ASTM D7624	>20	9.1	11.8	15.6
Sulfation	Abs/.1mm	*ASTM D7415	>30	47.2	55.1	63.5

FLUID DEGRADATION		method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	*ASTM D7414	>25	55.3	65.9	75.6
Base Number (BN)	mg KOH/g	ASTM D2896	12.6	2.3	0.0	0.0







OIL ANALYSIS REPORT

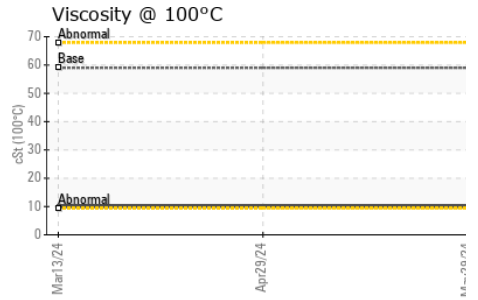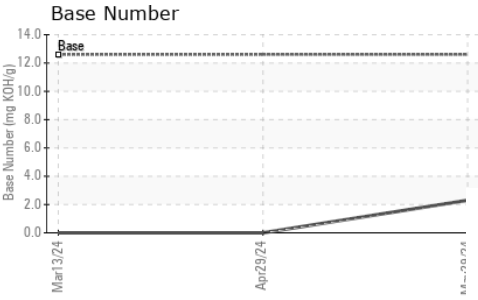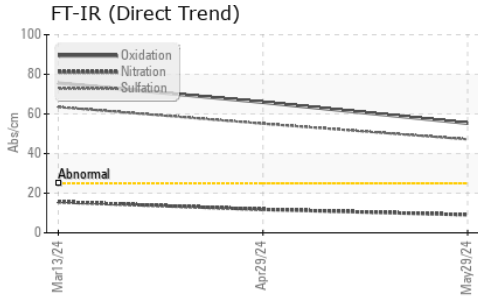

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D445	59.0	9.9	10.1

GRAPHS

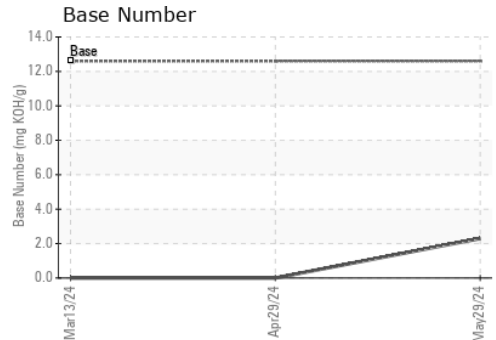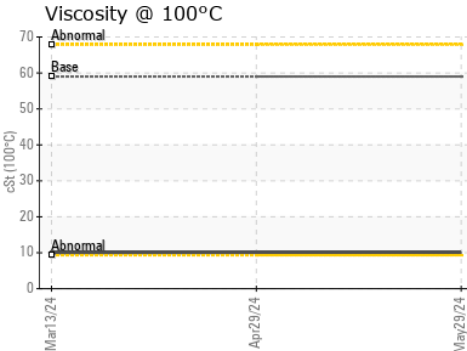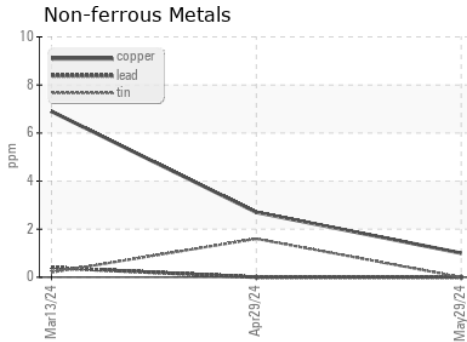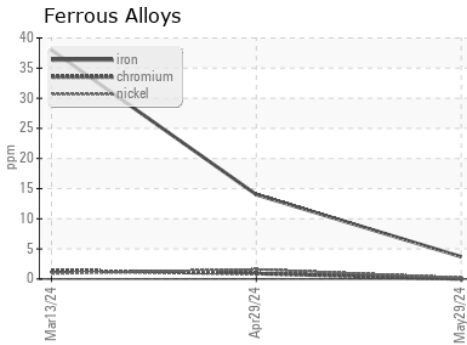

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513

Sample No. : WC0916660

Lab Number : 06198647

Unique Number : 11060770

Test Package : FLEET

Received : 03 Jun 2024

Tested : 04 Jun 2024

Diagnosed : 05 Jun 2024 - Doug Bogart

BILL WINNEY

P.O. BOX 334

BONDURANT, WY

US 82922

Contact: BILL WINNEY

bill.winney@hotmail.com

T:

F:

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)