

OIL ANALYSIS REPORT

Sample Rating Trend



DEGRADATION



Machine Id

909

Component

Diesel Engine

Fluid

DIESEL ENGINE OIL SAE 5W30 (--- QTS)

DIAGNOSIS

▲ Recommendation

Oil and filter change at the time of sampling has been noted. No corrective action is recommended at this time. Resample at the next service interval to monitor.

Wear

Metal levels are typical for a new component breaking in.

Contamination

Elevated aluminum (Al) and/or lead (Pb) and potassium (K) levels in your metals analysis are likely a result of solder flux release into the lubricant and is common on new equipment/components. There is no indication of any contamination in the oil.

▲ Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil.

SAMPLE INFORMATION method limit/base current history1 history2

Sample Number	Client Info		HRE0000222	---	---
Sample Date	Client Info		27 May 2024	---	---
Machine Age	mls	Client Info	71442	---	---
Oil Age	mls	Client Info	50000	---	---
Oil Changed	Client Info		Changed	---	---
Sample Status			ABNORMAL	---	---

CONTAMINATION method limit/base current history1 history2

Fuel	WC Method	>5	<1.0	---	---
Water	WC Method	>0.2	NEG	---	---
Glycol	WC Method		NEG	---	---

WEAR METALS method limit/base current history1 history2

Iron	ppm	ASTM D5185m	>100	120	---	---
Chromium	ppm	ASTM D5185m	>20	6	---	---
Nickel	ppm	ASTM D5185m	>4	0	---	---
Titanium	ppm	ASTM D5185m		0	---	---
Silver	ppm	ASTM D5185m	>3	<1	---	---
Aluminum	ppm	ASTM D5185m	>20	29	---	---
Lead	ppm	ASTM D5185m	>40	11	---	---
Copper	ppm	ASTM D5185m	>330	28	---	---
Tin	ppm	ASTM D5185m	>15	6	---	---
Vanadium	ppm	ASTM D5185m		0	---	---
Cadmium	ppm	ASTM D5185m		0	---	---

ADDITIVES method limit/base current history1 history2

Boron	ppm	ASTM D5185m	250	11	---	---
Barium	ppm	ASTM D5185m	10	4	---	---
Molybdenum	ppm	ASTM D5185m	100	67	---	---
Manganese	ppm	ASTM D5185m		5	---	---
Magnesium	ppm	ASTM D5185m	450	547	---	---
Calcium	ppm	ASTM D5185m	3000	1762	---	---
Phosphorus	ppm	ASTM D5185m	1150	1015	---	---
Zinc	ppm	ASTM D5185m	1350	1280	---	---
Sulfur	ppm	ASTM D5185m	4250	3052	---	---

CONTAMINANTS method limit/base current history1 history2

Silicon	ppm	ASTM D5185m	>25	27	---	---
Sodium	ppm	ASTM D5185m		6	---	---
Potassium	ppm	ASTM D5185m	>20	107	---	---






INFRA-RED method limit/base current history1 history2

Soot %	%	*ASTM D7844	>3	0.6	---	---
Nitration	Abs/cm	*ASTM D7624	>20	17.5	---	---
Sulfation	Abs/.1mm	*ASTM D7415	>30	33.0	---	---

FLUID DEGRADATION method limit/base current history1 history2

Oxidation	Abs/.1mm	*ASTM D7414	>25	38.8	---	---
Base Number (BN)	mg KOH/g	ASTM D2896	8.5	▲ 1.6	---	---





OIL ANALYSIS REPORT

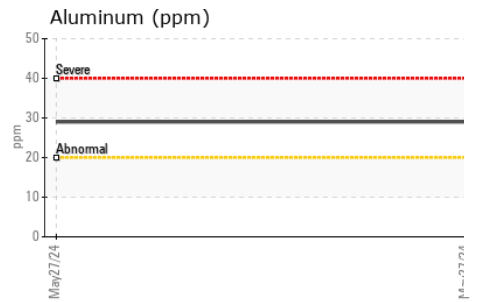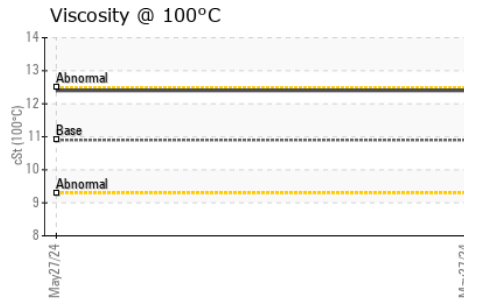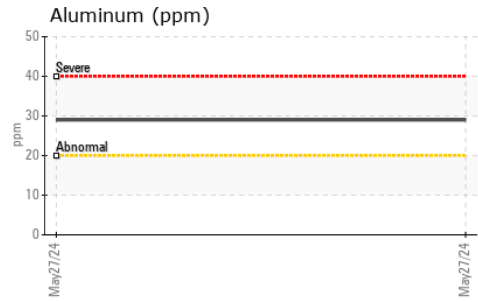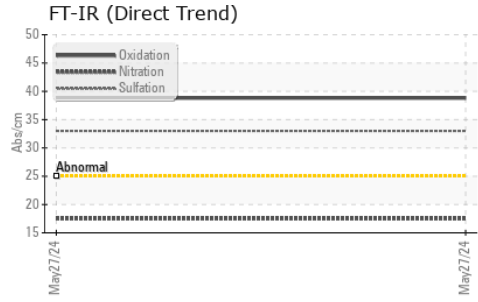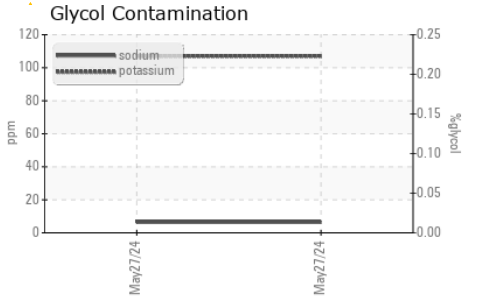

PROPERTY	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	---
Yellow Metal	scalar	*Visual	NONE	NONE	---
Precipitate	scalar	*Visual	NONE	NONE	---
Silt	scalar	*Visual	NONE	NONE	---
Debris	scalar	*Visual	NONE	NONE	---
Sand/Dirt	scalar	*Visual	NONE	NONE	---
Appearance	scalar	*Visual	NORML	NORML	---
Odor	scalar	*Visual	NORML	NORML	---
Emulsified Water	scalar	*Visual	>0.2	NEG	---
Free Water	scalar	*Visual		NEG	---

PROPERTY	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D445	10.9	12.4	---

GRAPHS

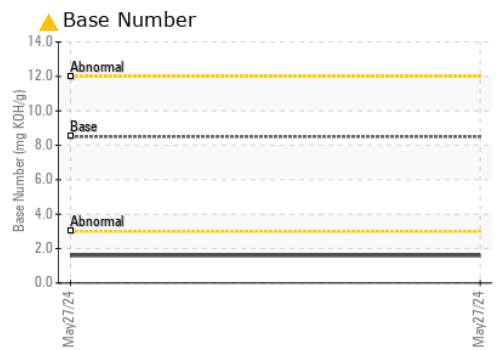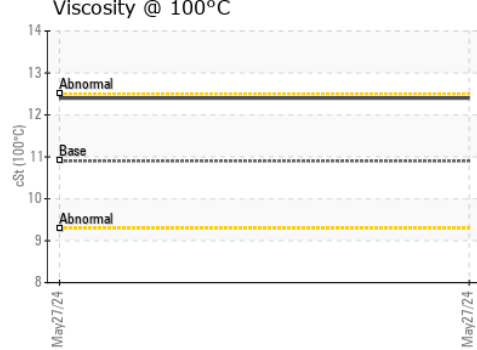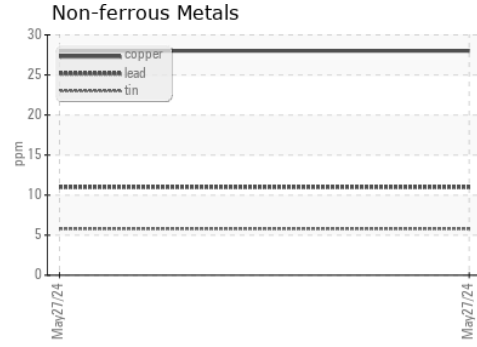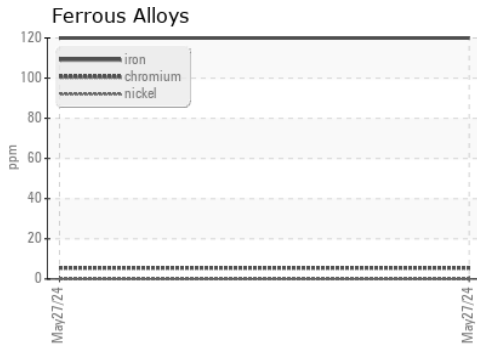

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : HRE0000222
Lab Number : 06198786
Unique Number : 11060909
Test Package : FLEET

Received : 04 Jun 2024
Tested : 05 Jun 2024
Diagnosed : 06 Jun 2024 - Sean Felton

MABE TRUCKING
 PO BOX 1081
 EDEN, NC
 US 27289

Contact: MAINTENANCE
 maintenancemanager@mabetrucking.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

F: (336)635-1791