




OIL ANALYSIS REPORT

Area
{UNASSIGNED}
 Machine Id
216
 Component
Diesel Engine
 Fluid
DIESEL ENGINE OIL SAE 40 (36 QTS)

Sample Rating Trend

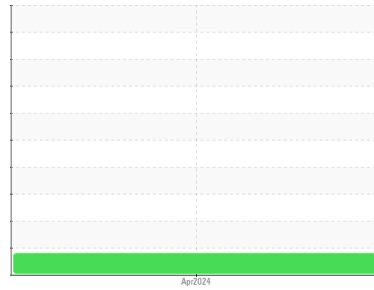

DIAGNOSIS

Recommendation
 Oil and filter change at the time of sampling has been noted. No corrective action is recommended at this time. Resample at the next service interval to monitor.

Wear
 Cylinder, crank, or cam shaft wear is indicated. All other component wear rates are normal.

Contamination
 There is no indication of any contamination in the oil.

Fluid Condition
 The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is acceptable for the time in service.

SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		WC0847916	---	---
Sample Date	Client Info		24 Apr 2024	---	---
Machine Age	hrs Client Info		5203	---	---
Oil Age	hrs Client Info		5203	---	---
Oil Changed	Client Info		Changed	---	---
Sample Status			ABNORMAL	---	---

CONTAMINATION

	method	limit/base	current	history1	history2
Fuel	WC Method	>3.0	<1.0	---	---
Water	WC Method	>0.2	NEG	---	---
Glycol	WC Method		NEG	---	---

WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm ASTM D5185m	>120	▲ 223	---	---
Chromium	ppm ASTM D5185m	>20	5	---	---
Nickel	ppm ASTM D5185m	>5	4	---	---
Titanium	ppm ASTM D5185m	>2	0	---	---
Silver	ppm ASTM D5185m	>2	0	---	---
Aluminum	ppm ASTM D5185m	>20	3	---	---
Lead	ppm ASTM D5185m	>40	<1	---	---
Copper	ppm ASTM D5185m	>330	15	---	---
Tin	ppm ASTM D5185m	>15	2	---	---
Vanadium	ppm ASTM D5185m		0	---	---
Cadmium	ppm ASTM D5185m		0	---	---

ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm ASTM D5185m	250	3	---	---
Barium	ppm ASTM D5185m	10	0	---	---
Molybdenum	ppm ASTM D5185m	100	65	---	---
Manganese	ppm ASTM D5185m		2	---	---
Magnesium	ppm ASTM D5185m	450	948	---	---
Calcium	ppm ASTM D5185m	3000	1190	---	---
Phosphorus	ppm ASTM D5185m	1150	1021	---	---
Zinc	ppm ASTM D5185m	1350	1239	---	---
Sulfur	ppm ASTM D5185m	4250	2658	---	---

CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm ASTM D5185m	>25	4	---	---
Sodium	ppm ASTM D5185m	>216	10	---	---
Potassium	ppm ASTM D5185m	>20	2	---	---

INFRA-RED





	method	limit/base	current	history1	history2
Soot %	% *ASTM D7844	>4	1.8	---	---
Nitration	Abs/cm *ASTM D7624	>20	13.8	---	---
Sulfation	Abs/.1mm *ASTM D7415	>30	27.9	---	---

FLUID DEGRADATION

	method	limit/base	current	history1	history2
Oxidation	Abs/.1mm *ASTM D7414	>25	32.3	---	---
Base Number (BN)	mg KOH/g ASTM D2896	8.5	5.5	---	---







OIL ANALYSIS REPORT

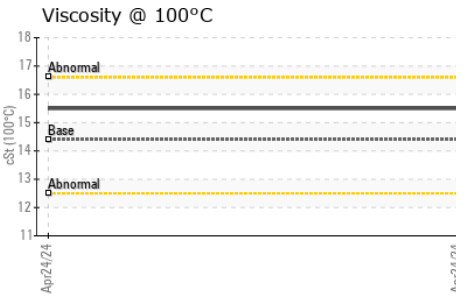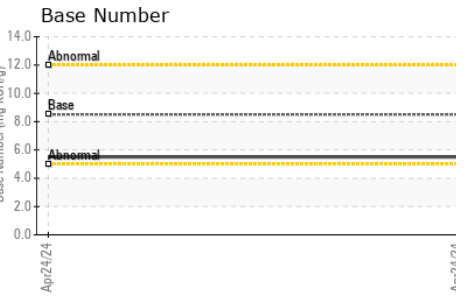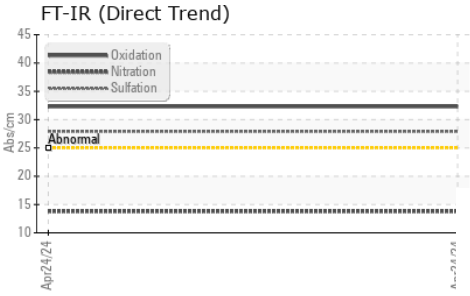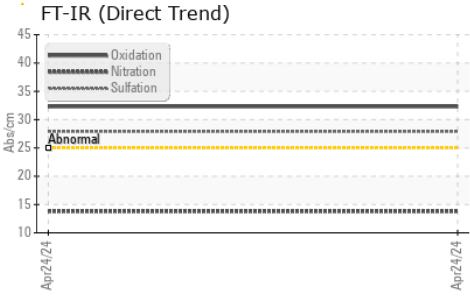

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	---
Yellow Metal	scalar	*Visual	NONE	NONE	---
Precipitate	scalar	*Visual	NONE	NONE	---
Silt	scalar	*Visual	NONE	NONE	---
Debris	scalar	*Visual	NONE	NONE	---
Sand/Dirt	scalar	*Visual	NONE	NONE	---
Appearance	scalar	*Visual	NORML	NORML	---
Odor	scalar	*Visual	NORML	NORML	---
Emulsified Water	scalar	*Visual	>0.2	NEG	---
Free Water	scalar	*Visual		NEG	---

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D445	14.4	15.5	---

GRAPHS

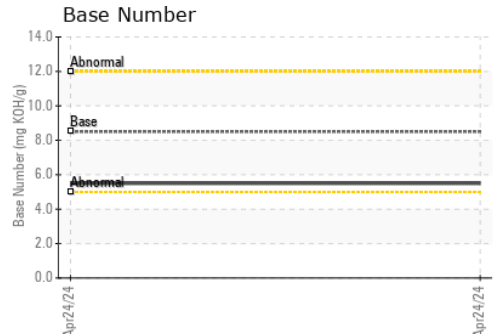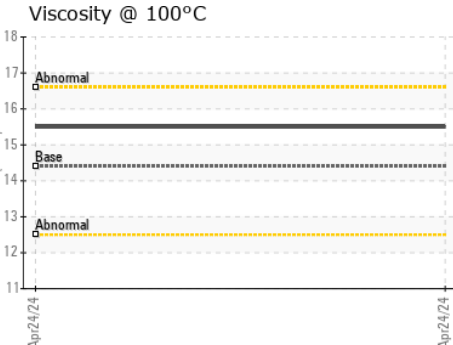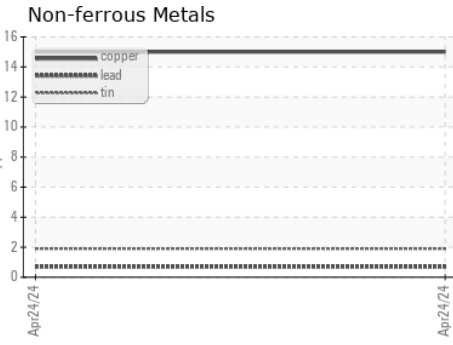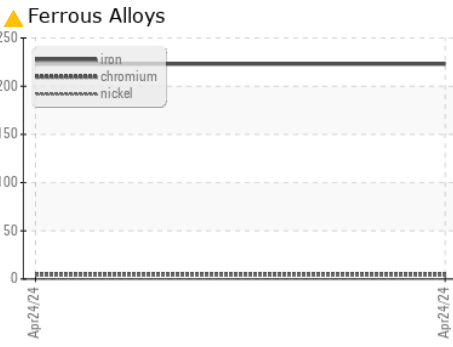

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : WC0847916
Lab Number : 06198949
Unique Number : 11061072
Test Package : CONST (Additional Tests: TBN)

Received : 04 Jun 2024
Tested : 05 Jun 2024
Diagnosed : 06 Jun 2024 - Don Baldrige

Apple Valley Waste - Chambersburg Location
 5436 Sunset Pike
 Chambersburg, PA
 US 17202
 Contact: Service Manager

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:
F: