




# OIL ANALYSIS REPORT

Sample Rating Trend

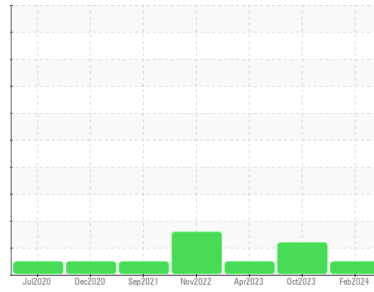

**NORMAL**



Machine Id  
**KAESER 6549693 - COMP 2**  
 Component  
**Compressor**  
 Fluid  
**KAESER SIGMA (OEM) S-460 (--- GAL)**

**DIAGNOSIS**

**Recommendation**

Resample at the next service interval to monitor.

**Wear**

All component wear rates are normal.

**Contamination**

There is no indication of any contamination in the oil. The amount and size of particulates present in the system are acceptable.

**Fluid Condition**

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

SAMPLE INFORMATION		method	limit/base	current	history1	history2
Sample Number	Client Info			<b>KCP51374</b>	KCPA006914	KCP52647
Sample Date	Client Info			<b>08 Feb 2024</b>	10 Oct 2023	17 Apr 2023
Machine Age	hrs	Client Info		<b>16509</b>	16313	15189
Oil Age	hrs	Client Info		<b>196</b>	0	1383
Oil Changed	Client Info			<b>Not Chngd</b>	N/A	Not Chngd
Sample Status				<b>NORMAL</b>	ATTENTION	NORMAL

WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>50	<b>0</b>	0	0
Chromium	ppm	ASTM D5185m	>10	<b>&lt;1</b>	<1	0
Nickel	ppm	ASTM D5185m	>3	<b>0</b>	<1	0
Titanium	ppm	ASTM D5185m	>3	<b>0</b>	<1	0
Silver	ppm	ASTM D5185m	>2	<b>0</b>	<1	0
Aluminum	ppm	ASTM D5185m	>10	<b>3</b>	2	0
Lead	ppm	ASTM D5185m	>10	<b>&lt;1</b>	<1	0
Copper	ppm	ASTM D5185m	>50	<b>&lt;1</b>	1	<1
Tin	ppm	ASTM D5185m	>10	<b>&lt;1</b>	<1	0
Vanadium	ppm	ASTM D5185m		<b>0</b>	0	0
Cadmium	ppm	ASTM D5185m		<b>0</b>	<1	0






ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m		<b>0</b>	0	0
Barium	ppm	ASTM D5185m	90	<b>83</b>	64	63
Molybdenum	ppm	ASTM D5185m		<b>0</b>	<1	0
Manganese	ppm	ASTM D5185m		<b>0</b>	0	0
Magnesium	ppm	ASTM D5185m	90	<b>84</b>	80	80
Calcium	ppm	ASTM D5185m	2	<b>0</b>	3	4
Phosphorus	ppm	ASTM D5185m		<b>0</b>	3	0
Zinc	ppm	ASTM D5185m		<b>0</b>	0	3
Sulfur	ppm	ASTM D5185m		<b>21423</b>	18784	17536

CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>25	<b>&lt;1</b>	<1	0
Sodium	ppm	ASTM D5185m		<b>14</b>	29	28
Potassium	ppm	ASTM D5185m	>20	<b>4</b>	11	7
Water	%	ASTM D6304	>0.05	<b>0.028</b>	0.023	0.025
ppm Water	ppm	ASTM D6304	>500	<b>288</b>	236.6	259.3

FLUID CLEANLINESS		method	limit/base	current	history1	history2
Particles >4µm		ASTM D7647		<b>5048</b>	6113	1386
Particles >6µm		ASTM D7647	>1300	<b>1117</b>	1661	591
Particles >14µm		ASTM D7647	>80	<b>73</b>	105	73
Particles >21µm		ASTM D7647	>20	<b>22</b>	25	14
Particles >38µm		ASTM D7647	>4	<b>5</b>	1	1
Particles >71µm		ASTM D7647	>3	<b>3</b>	0	0
Oil Cleanliness		ISO 4406 (c)	>--/17/13	<b>20/17/13</b>	20/18/14	18/16/13

FLUID DEGRADATION		method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D8045	0.4	<b>0.36</b>	0.30	0.31


# OIL ANALYSIS REPORT

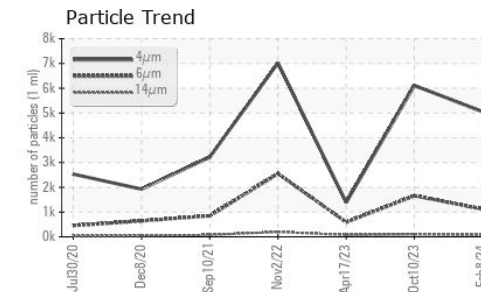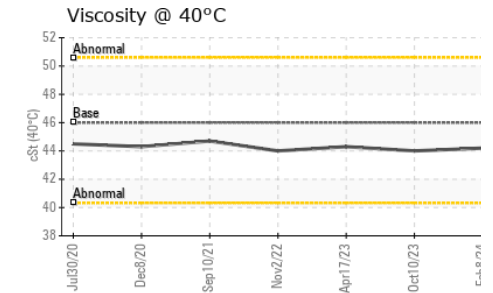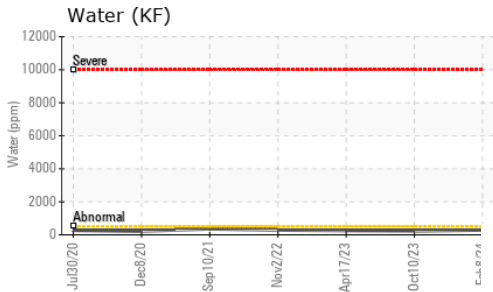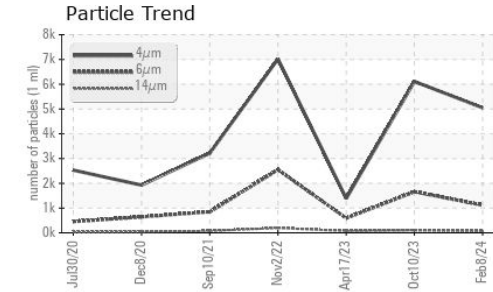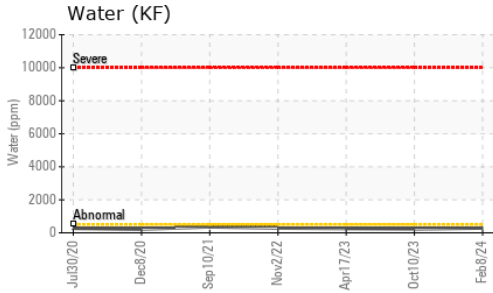






VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.05	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D445 46	44.2	44.0	44.3

SAMPLE IMAGES	method	limit/base	current	history1	history2
---------------	--------	------------	---------	----------	----------

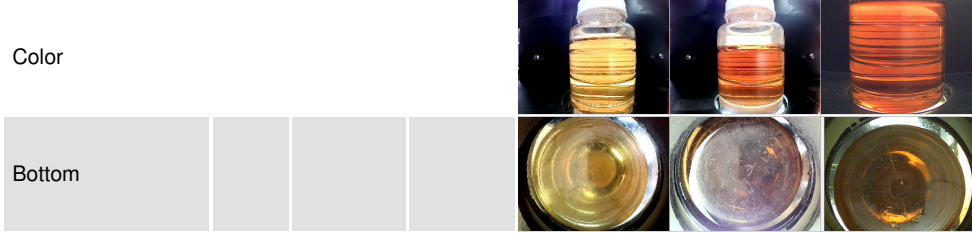

## GRAPHS

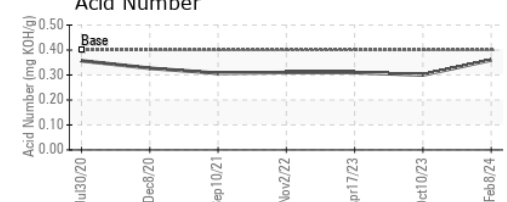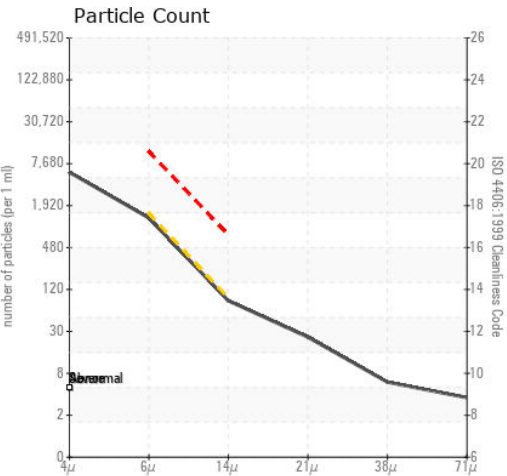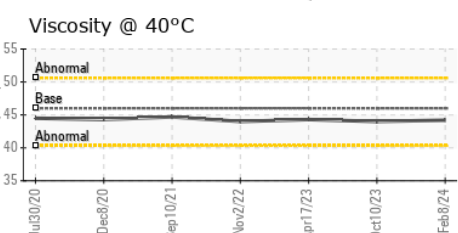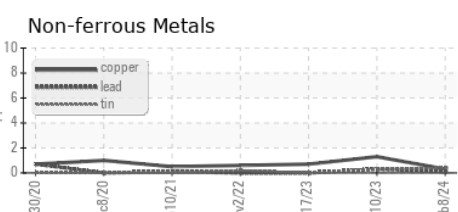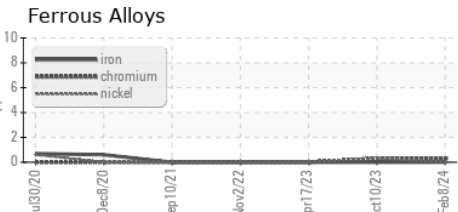

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : KCP51374 **Received** : 04 Jun 2024  
**Lab Number** : 06199162 **Tested** : 05 Jun 2024  
**Unique Number** : 11061285 **Diagnosed** : 06 Jun 2024 - Don Baldrige  
**Test Package** : IND 2 ( Additional Tests: KF, PrtCount )

**AMAZON**  
 3292 E HOLMES RD  
 MEMPHIS, TN  
 US 38118  
 Contact: Service Manager

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.  
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)