




# OIL ANALYSIS REPORT

## Sample Rating Trend

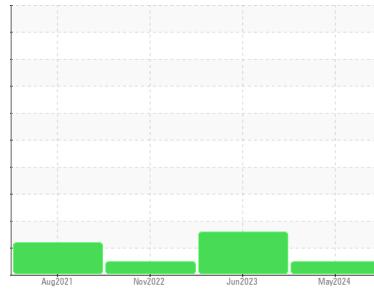

**NORMAL**



Machine Id  
**7378455 (S/N 1560)**  
 Component  
**Compressor**  
 Fluid  
**KAESER SIGMA (OEM) S-460 (--- GAL)**

### DIAGNOSIS

#### Recommendation

Resample at the next service interval to monitor.

#### Wear

All component wear rates are normal.

#### Contamination

The amount and size of particulates present in the system are acceptable. There is no indication of any contamination in the oil.

#### Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

SAMPLE INFORMATION		method	limit/base	current	history1	history2
Sample Number	Client Info			<b>KCPA004739</b>	KCPA003900	KCP47969D
Sample Date	Client Info			<b>21 May 2024</b>	26 Jun 2023	09 Nov 2022
Machine Age	hrs	Client Info		<b>10281</b>	7332	5427
Oil Age	hrs	Client Info		<b>0</b>	0	3489
Oil Changed	Client Info			<b>N/A</b>	N/A	Changed
Sample Status				<b>NORMAL</b>	ABNORMAL	NORMAL

WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>50	<b>0</b>	0	<1
Chromium	ppm	ASTM D5185m	>10	<b>&lt;1</b>	0	0
Nickel	ppm	ASTM D5185m	>3	<b>0</b>	0	0
Titanium	ppm	ASTM D5185m	>3	<b>0</b>	<1	0
Silver	ppm	ASTM D5185m	>2	<b>0</b>	0	0
Aluminum	ppm	ASTM D5185m	>10	<b>3</b>	<1	<1
Lead	ppm	ASTM D5185m	>10	<b>0</b>	0	0
Copper	ppm	ASTM D5185m	>50	<b>9</b>	2	5
Tin	ppm	ASTM D5185m	>10	<b>&lt;1</b>	0	<1
Antimony	ppm	ASTM D5185m		<b>---</b>	---	---
Vanadium	ppm	ASTM D5185m		<b>0</b>	0	0
Cadmium	ppm	ASTM D5185m		<b>0</b>	0	0






ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m		<b>0</b>	0	0
Barium	ppm	ASTM D5185m	90	<b>0</b>	26	7
Molybdenum	ppm	ASTM D5185m		<b>0</b>	0	0
Manganese	ppm	ASTM D5185m		<b>0</b>	0	0
Magnesium	ppm	ASTM D5185m	90	<b>45</b>	81	61
Calcium	ppm	ASTM D5185m	2	<b>0</b>	2	0
Phosphorus	ppm	ASTM D5185m		<b>0</b>	4	2
Zinc	ppm	ASTM D5185m		<b>4</b>	28	4
Sulfur	ppm	ASTM D5185m		<b>20934</b>	19396	20873

CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>25	<b>&lt;1</b>	0	<1
Sodium	ppm	ASTM D5185m		<b>5</b>	8	21
Potassium	ppm	ASTM D5185m	>20	<b>3</b>	2	4
Water	%	ASTM D6304	>0.05	<b>0.016</b>	0.021	0.027
ppm Water	ppm	ASTM D6304	>500	<b>163</b>	215.3	273.0

FLUID CLEANLINESS		method	limit/base	current	history1	history2
Particles >4µm		ASTM D7647		<b>680</b>	4903	591
Particles >6µm		ASTM D7647	>1300	<b>113</b>	▲ 1899	108
Particles >14µm		ASTM D7647	>80	<b>21</b>	▲ 182	7
Particles >21µm		ASTM D7647	>20	<b>11</b>	▲ 37	2
Particles >38µm		ASTM D7647	>4	<b>2</b>	1	0
Particles >71µm		ASTM D7647	>3	<b>0</b>	0	0
Oil Cleanliness		ISO 4406 (c)	>--/17/13	<b>17/14/12</b>	▲ 19/18/15	16/14/10

FLUID DEGRADATION		method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D8045	0.4	<b>0.34</b>	0.34	0.32


# OIL ANALYSIS REPORT

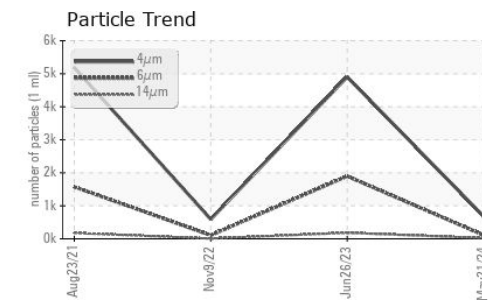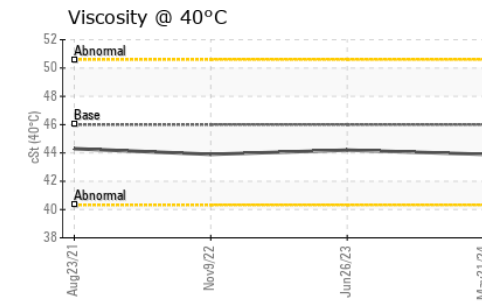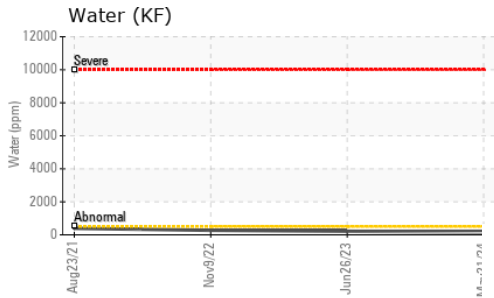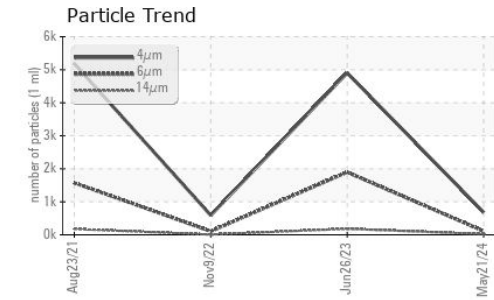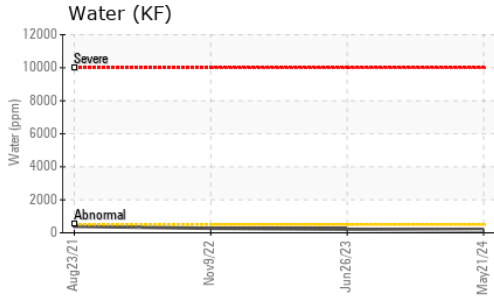





VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	LIGHT
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.05	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D445	46	43.9	44.2

SAMPLE IMAGES	method	limit/base	current	history1	history2
---------------	--------	------------	---------	----------	----------

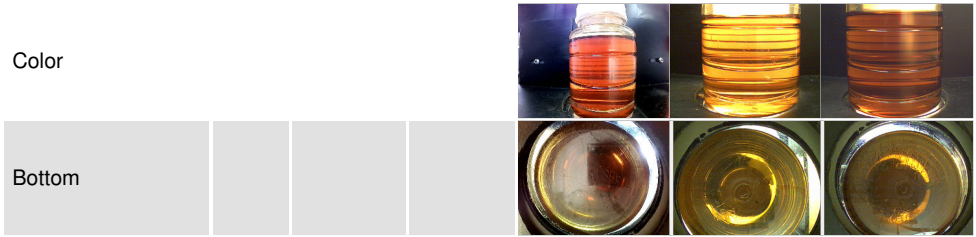

## GRAPHS

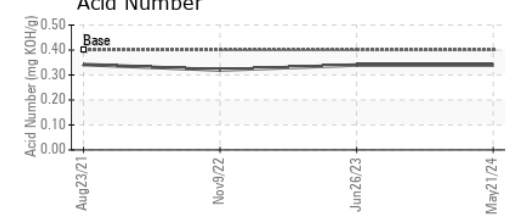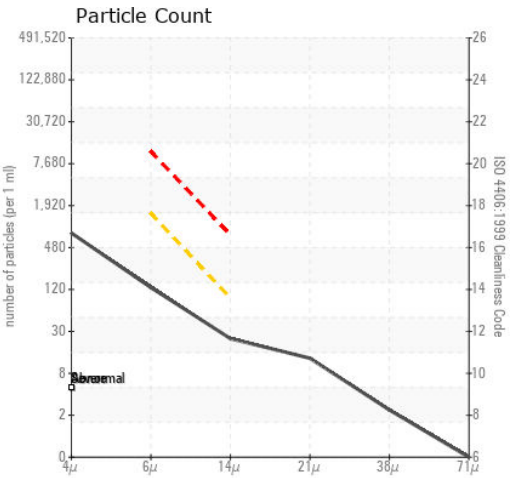

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : KCPA004739  
**Lab Number** : 06199164  
**Unique Number** : 11061287  
**Test Package** : IND 2 ( Additional Tests: KF, PrtCount )  
**Received** : 04 Jun 2024  
**Tested** : 05 Jun 2024  
**Diagnosed** : 06 Jun 2024 - Don Baldrige

**NGAGE MEDICAL**  
 3082 INDUSTRIAL DR W  
 HERNANDO, MS  
 US 38632  
 Contact: Service Manager

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:  
F: