


OIL ANALYSIS REPORT

Sample Rating Trend



Machine Id

7072528 (S/N 1172) Compressor

Fluid KAESER SIGMA (OEM) S-460 (--- GAL)

DIAGNOSIS

Recommendation

No corrective action is recommended at this time. Oil and filter change at the time of sampling has been noted. Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

There is a high amount of particulates present in the oil.

Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is acceptable for the time in service.


SAMPLE INFORM	IATION	method	limit/base	current	history1	history2
Sample Number		Client Info		KCPA018035	KCPA001776	KCP51469
Sample Date		Client Info		13 May 2024	30 May 2023	26 May 2022
Machine Age	hrs	Client Info		22185	17579	13033
Oil Age	hrs	Client Info		4606	0	0
Oil Changed		Client Info		Changed	N/A	Changed
Sample Status				ABNORMAL	ABNORMAL	NORMAL
WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>50	0	0	<1
Chromium	ppm	ASTM D5185m	>10	<1	0	0
Nickel	ppm	ASTM D5185m	>3	0	0	0
Titanium	ppm	ASTM D5185m	>3	0	0	0
Silver	ppm	ASTM D5185m	>2	0	0	0
Aluminum	ppm	ASTM D5185m	>10	3	0	<1
Lead	ppm	ASTM D5185m	>10	<1	0	2
Copper	ppm	ASTM D5185m	>50	5	2	3
Tin	ppm	ASTM D5185m	>10	ء <1	0	<1
Antimony	ppm	ASTM D5185m				
Vanadium	ppm	ASTM D5185m		0	0	0
Cadmium	ppm	ASTM D5185m		0	0	0
	ppin				-	
ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m		0	0	1
Barium	ppm	ASTM D5185m	90	0	0	0
Molybdenum	ppm	ASTM D5185m		0	0	0
Vanganese	ppm	ASTM D5185m		0	0	0
Magnesium	ppm	ASTM D5185m	90	54	59	57
Calcium	ppm	ASTM D5185m	2	0	<1	0
Phosphorus	ppm	ASTM D5185m		0	2	10
Zinc	ppm	ASTM D5185m		2	0	<1
Sulfur	ppm	ASTM D5185m		22725	23171	18066
CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm					.4
	1010	ASTM D5185m	>25	<1	<1	<1
	ppm	ASTM D5185m ASTM D5185m	>25	<1 18	<1 12	17
Sodium			>25 >20			
Sodium Potassium	ppm	ASTM D5185m	>20	18	12	17
Sodium Potassium Water	ppm ppm	ASTM D5185m ASTM D5185m	>20	18 4	12 3	17 0
Sodium Potassium Water	ppm ppm % ppm	ASTM D5185m ASTM D5185m ASTM D6304	>20 >0.05	18 4 0.015	12 3 0.014	17 0 0.021 212.5
Sodium Potassium Water ppm Water FLUID CLEANLIN	ppm ppm % ppm	ASTM D5185m ASTM D5185m ASTM D6304 ASTM D6304	>20 >0.05 >500	18 4 0.015 157	12 3 0.014 145.2	17 0 0.021 212.5
Sodium Potassium Water opm Water FLUID CLEANLIN Particles >4µm	ppm ppm % ppm	ASTM D5185m ASTM D5185m ASTM D6304 ASTM D6304 method	>20 >0.05 >500 limit/base	18 4 0.015 157 current	12 3 0.014 145.2 history1	17 0 0.021 212.5 history2
Sodium Potassium Water opm Water FLUID CLEANLIN Particles >4µm Particles >6µm	ppm ppm % ppm	ASTM D5185m ASTM D5185m ASTM D6304 ASTM D6304 method ASTM D7647	>20 >0.05 >500 limit/base	18 4 0.015 157 current 15737	12 3 0.014 145.2 history1 8464	17 0 0.021 212.5 history2 708
Sodium Potassium Water opm Water FLUID CLEANLIN Particles >4µm Particles >6µm Particles >14µm	ppm ppm % ppm	ASTM D5185m ASTM D5185m ASTM D6304 ASTM D6304 method ASTM D7647 ASTM D7647	>20 >0.05 >500 limit/base >1300 >80	18 4 0.015 157 <u>current</u> 15737 ▲ 6645	12 3 0.014 145.2 history1 8464 ▲ 3391	17 0 0.021 212.5 history2 708 201
Sodium Potassium Water opm Water FLUID CLEANLIN Particles >4µm Particles >6µm Particles >14µm Particles >21µm	ppm ppm % ppm	ASTM D5185m ASTM D5185m ASTM D6304 ASTM D6304 Method ASTM D7647 ASTM D7647 ASTM D7647	>20 >0.05 >500 limit/base >1300 >80	18 4 0.015 157 current 15737 ▲ 6645 ▲ 1550	12 3 0.014 145.2 history1 8464 3391 ▲ 3391	17 0 0.021 212.5 history2 708 201 16
Sodium Potassium Water ppm Water FLUID CLEANLIN Particles >4µm Particles >6µm Particles >14µm Particles >21µm Particles >38µm	ppm ppm % ppm	ASTM D5185m ASTM D5185m ASTM D6304 ASTM D6304 ASTM D7647 ASTM D7647 ASTM D7647 ASTM D7647 ASTM D7647	>20 >0.05 >500 limit/base >1300 >80 >20 >4	18 4 0.015 157 current 15737 ▲ 6645 ▲ 1550 ▲ 473	12 3 0.014 145.2 history1 8464 ▲ 3391 ▲ 381 ▲ 95	17 0 0.021 212.5 history2 708 201 16 4
Sodium Potassium Water ppm Water FLUID CLEANLIN Particles >4µm Particles >6µm Particles >14µm Particles >21µm Particles >38µm Particles >71µm	ppm ppm % ppm	ASTM D5185m ASTM D5185m ASTM D6304 ASTM D6304 ASTM D7647 ASTM D7647 ASTM D7647 ASTM D7647	>20 >0.05 >500 limit/base >1300 >80 >20 >4	18 4 0.015 157 current 15737 ▲ 6645 ▲ 1550 ▲ 473 ▲ 22	12 3 0.014 145.2 history1 8464 3391 381 381 395 2	17 0 0.021 212.5 history2 708 201 16 4 0
Sodium Potassium Water ppm Water	ppm % ppm ESS	ASTM D5185m ASTM D5185m ASTM D6304 ASTM D6304 ASTM D7647 ASTM D7647 ASTM D7647 ASTM D7647 ASTM D7647 ASTM D7647	>20 >0.05 >500 limit/base >1300 >80 >20 >4 >3	18 4 0.015 157 current 15737 ▲ 6645 ▲ 1550 ▲ 473 ▲ 22 1	12 3 0.014 145.2 history1 8464 3391 381 381 95 2 0	17 0 0.021 212.5 history2 708 201 16 4 0 0


Report Id: CAREDEMN [WUSCAR] 06199171 (Generated: 06/08/2024 10:51:13) Rev: 1


Contact/Location: Service Manager - CAREDEMN





OIL ANALYSIS REPORT













VISUAL		method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	LIGHT	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.05	NEG	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG	NEG
FLUID PROPERT	IES	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D445	46	44.0	40.5	43.8
SAMPLE IMAGES	6	method	limit/base	current	history1	history2
Color				A.		



Bottom

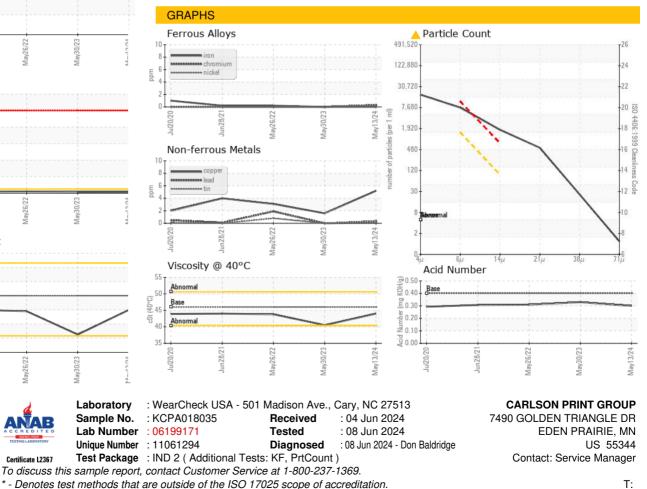

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

Report Id: CAREDEMN [WUSCAR] 06199171 (Generated: 06/08/2024 10:51:13) Rev: 1

Certificate 12367

Contact/Location: Service Manager - CAREDEMN

F: