




OIL ANALYSIS REPORT

Sample Rating Trend

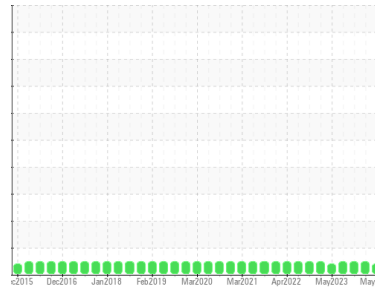

VIS DEBRIS



Machine Id
BEEF SUPPORT 1A NK
 Component
Hydraulic System
 Fluid
USPI FG HYD 46 (--- LTR)

DIAGNOSIS

Recommendation

We recommend you service the filters on this component. Resample at the next service interval to monitor. We were unable to perform a particle count due to a high concentration of particles present in this sample.

Wear

All component wear rates are normal.

Contamination

Moderate concentration of visible dirt/debris present in the oil.

Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

SAMPLE INFORMATION

| | method | limit/base | current | history1 | history2 |
|---------------|-------------|-------------|--------------------|-------------|-------------|
| Sample Number | Client Info | | USPM36433 | USPM30203 | USPM31462 |
| Sample Date | Client Info | | 30 May 2024 | 27 Feb 2024 | 27 Nov 2023 |
| Machine Age | hrs | Client Info | 0 | 0 | 0 |
| Oil Age | hrs | Client Info | 0 | 0 | 0 |
| Oil Changed | Client Info | | N/A | N/A | N/A |
| Sample Status | | | ABNORMAL | NORMAL | NORMAL |

WEAR METALS

| | method | limit/base | current | history1 | history2 |
|----------|--------|-----------------|--------------|----------|----------|
| Iron | ppm | ASTM D5185m >20 | 4 | 4 | 2 |
| Chromium | ppm | ASTM D5185m >20 | <1 | <1 | 0 |
| Nickel | ppm | ASTM D5185m >20 | 0 | <1 | <1 |
| Titanium | ppm | ASTM D5185m | 0 | 0 | <1 |
| Silver | ppm | ASTM D5185m | 0 | 0 | 0 |
| Aluminum | ppm | ASTM D5185m >20 | 0 | 0 | 0 |
| Lead | ppm | ASTM D5185m >20 | 0 | 0 | <1 |
| Copper | ppm | ASTM D5185m >20 | 0 | <1 | <1 |
| Tin | ppm | ASTM D5185m >20 | 0 | 0 | <1 |
| Vanadium | ppm | ASTM D5185m | 0 | 0 | 0 |
| Cadmium | ppm | ASTM D5185m | 0 | 0 | <1 |

ADDITIVES

| | method | limit/base | current | history1 | history2 |
|------------|--------|-----------------|--------------|----------|----------|
| Boron | ppm | ASTM D5185m | 0 | 0 | 0 |
| Barium | ppm | ASTM D5185m | 0 | 0 | 0 |
| Molybdenum | ppm | ASTM D5185m | 0 | 0 | <1 |
| Manganese | ppm | ASTM D5185m | <1 | <1 | <1 |
| Magnesium | ppm | ASTM D5185m | 0 | 1 | 0 |
| Calcium | ppm | ASTM D5185m | 0 | 1 | <1 |
| Phosphorus | ppm | ASTM D5185m 725 | 434 | 428 | 376 |
| Zinc | ppm | ASTM D5185m | 0 | 4 | 0 |
| Sulfur | ppm | ASTM D5185m 625 | 529 | 490 | 467 |

CONTAMINANTS

| | method | limit/base | current | history1 | history2 |
|-----------|--------|------------------|--------------|----------|----------|
| Silicon | ppm | ASTM D5185m >15 | 5 | 5 | 2 |
| Sodium | ppm | ASTM D5185m | 1 | 1 | 0 |
| Potassium | ppm | ASTM D5185m >20 | <1 | <1 | 2 |
| Water | % | ASTM D6304 >0.05 | 0.006 | 0.007 | 0.002 |
| ppm Water | ppm | ASTM D6304 >500 | 62 | 72 | 25 |

FLUID CLEANLINESS




| | method | limit/base | current | history1 | history2 |
|-----------------|--------------|------------|------------|----------|----------|
| Particles >4µm | ASTM D7647 | >5000 | --- | 1889 | 649 |
| Particles >6µm | ASTM D7647 | >1300 | --- | 462 | 151 |
| Particles >14µm | ASTM D7647 | >160 | --- | 12 | 8 |
| Particles >21µm | ASTM D7647 | >40 | --- | 3 | 2 |
| Particles >38µm | ASTM D7647 | >10 | --- | 0 | 0 |
| Particles >71µm | ASTM D7647 | >3 | --- | 0 | 0 |
| Oil Cleanliness | ISO 4406 (c) | >19/17/14 | --- | 18/16/11 | 17/14/10 |

FLUID DEGRADATION

| | method | limit/base | current | history1 | history2 |
|------------------|----------|-----------------|-------------|----------|----------|
| Acid Number (AN) | mg KOH/g | ASTM D8045 0.36 | 0.26 | 0.17 | 0.15 |




OIL ANALYSIS REPORT

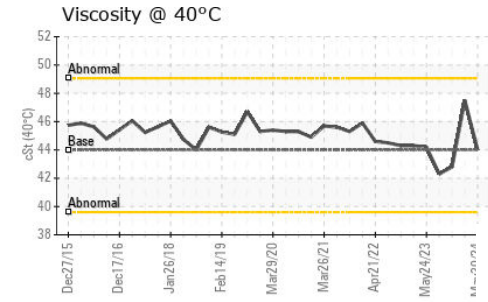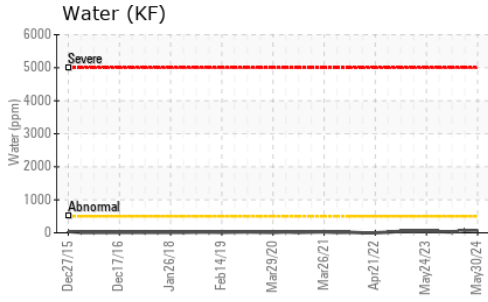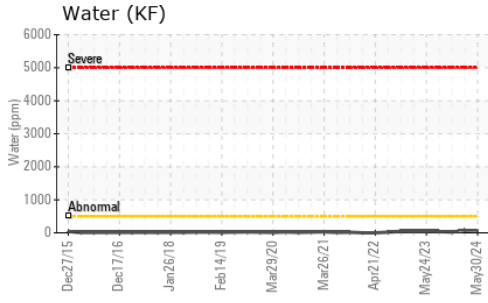





| VISUAL | method | limit/base | current | history1 | history2 |
|------------------|--------|------------|---------|----------|----------|
| White Metal | scalar | *Visual | NONE | NONE | NONE |
| Yellow Metal | scalar | *Visual | NONE | NONE | NONE |
| Precipitate | scalar | *Visual | NONE | NONE | NONE |
| Silt | scalar | *Visual | NONE | NONE | NONE |
| Debris | scalar | *Visual | NONE | ▲ MODER | NONE |
| Sand/Dirt | scalar | *Visual | NONE | NONE | NONE |
| Appearance | scalar | *Visual | NORML | NORML | NORML |
| Odor | scalar | *Visual | NORML | NORML | NORML |
| Emulsified Water | scalar | *Visual | >0.05 | NEG | NEG |
| Free Water | scalar | *Visual | | NEG | NEG |

| FLUID PROPERTIES | method | limit/base | current | history1 | history2 |
|------------------|--------|------------|---------|----------|----------|
| Visc @ 40°C | cSt | ASTM D445 | 44 | 47.5 | 42.8 |

| SAMPLE IMAGES | method | limit/base | current | history1 | history2 |
|---------------|--------|------------|---------|----------|----------|
|---------------|--------|------------|---------|----------|----------|

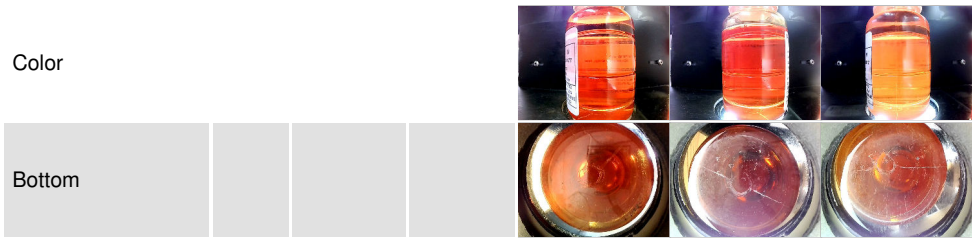

GRAPHS

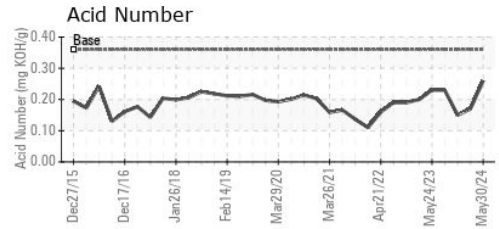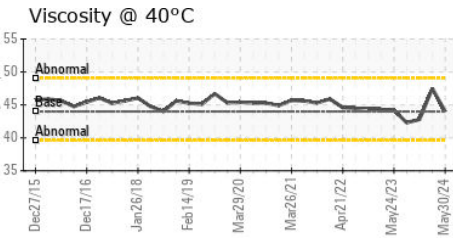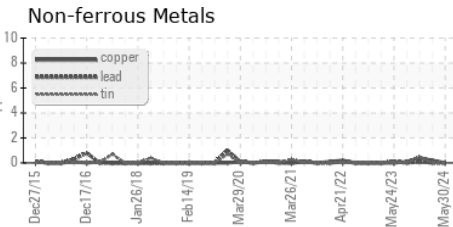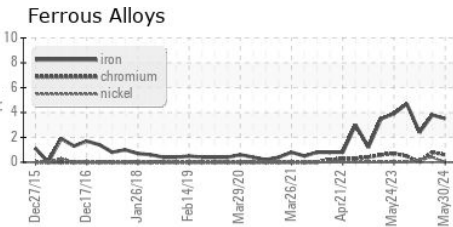

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : USPM36433
Lab Number : 06199213
Unique Number : 11061336
Test Package : IND 2

Received : 04 Jun 2024
Tested : 09 Jun 2024
Diagnosed : 09 Jun 2024 - Doug Bogart

TYSON - DAKOTA CITY SLAUGHTER

DAKOTA CITY, NE
 US

Contact:
 doug.bogart@wearcheck.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)