

OIL ANALYSIS REPORT

DIRT

Machine Id **ALLISON 37** Component **Transmission (Auto)** Fluid **ALLISON TES 295 (6 GAL)**

DIAGNOSIS

A Recommendation

Oil and filter change at the time of sampling has been noted. Resample at the next service interval to monitor.

🔺 Wear

The aluminum level is abnormal. Torque converter wear is indicated.

Contamination

Elemental level of silicon (Si) above normal indicating ingress of seal material.


Fluid Condition

Additive levels do not indicate the addition of a different brand, or type of fluid. The condition of the fluid is acceptable for the time in service.

Is C Is C Is C C W W U U U U U U U U U U U U U U U U	lient Info lient Info lient Info lient Info dient Info dient Info method /C Method /C	limit/base >230 >2 >5 >2 >5 >65 >55 >85 >5	WC0882506 31 May 2024 219361 Changed ABNORMAL Current 95 <10 0 <10 0 137 1 17 0 <10 <100000000000000000000000000000000000	 history1 -	
Is C Is C C C U U U U U U U U U U U U U U U U U	lient Info lient Info lient Info method /C Method GTM D5185m GTM D5185m	>0.1 limit/base >230 >2 >5 >2 >5 >55 >85 >55 >5	219361 219361 Changed ABNORMAL Current NEG 0 2 3 3 3 3 3 3 3 3 3 3 3 3 3 3 3 3 3 3	 history1 history1 -	 history2 history2 -
Is C C C W W U U U W U U U W U U U U U U U	lient Info lient Info method /C Method method STM D5185m STM D5185m STM D5185m STM D5185m STM D5185m STM D5185m STM D5185m STM D5185m STM D5185m STM D5185m	>0.1 limit/base >230 >2 >5 >2 >5 >55 >85 >55 >5	219361 219361 Changed ABNORMAL Current NEG 0 2 3 3 3 3 3 3 3 3 3 3 3 3 3 3 3 3 3 3	 history1 history1 -	I instory2 history2 instory2 -
C Market Constraints of the constraints of the constraints of the constraints of the constraint of the	Ilient Info method /C Method method STM D5185m STM D5185m STM D5185m STM D5185m STM D5185m STM D5185m STM D5185m STM D5185m STM D5185m STM D5185m	>0.1 limit/base >230 >2 >5 >2 >5 >55 >85 >55 >5	Changed ABNORMAL current NEG 95 <10 0 <10 0 <137 137 1 17 0 <<1 17	history1 history1 history1	 history2 history2 -
ASDOM	method /C Method STM D5185m STM D5185m	>0.1 limit/base >230 >2 >5 >2 >5 >55 >55 >55 >5 >5	ABNORMAL current NEG 95 <1 0 <1 0 <1 0 ↓ 137 1 17 0 <1 17 0 <1 17 0 <1 17 0 <1 17 0 <1 17 0 <1 17 0 <1 17 17 17 17 17 17 17 17 17 1	history1 history1	history2 history
W ASS ASS ASS ASS ASS ASS ASS ASS ASS AS	/C Method method STM D5185m STM D5185m STM D5185m STM D5185m STM D5185m STM D5185m STM D5185m STM D5185m STM D5185m STM D5185m	>0.1 limit/base >230 >2 >5 >2 >5 >55 >55 >55 >5 >5	Current NEG 95 <1 0 <1 0 <1 0 137 1 17 0 <1 17 0 <1 1	history1 history1	history2 history2 -
W ASS ASS ASS ASS ASS ASS ASS ASS ASS AS	/C Method method STM D5185m STM D5185m STM D5185m STM D5185m STM D5185m STM D5185m STM D5185m STM D5185m STM D5185m STM D5185m	>0.1 limit/base >230 >2 >5 >2 >5 >55 >55 >55 >5 >5	NEG current 95 <1 0 <1 0 ↓ 137 1 17 0 <1 17 0 <1	 history1 -	 history2 -
AS AS AS AS AS AS AS AS AS AS AS AS AS A	method GTM D5185m GTM D5185m	limit/base >230 >2 >5 >2 >5 >65 >55 >85 >5	Current 95 <1 0 <1 0 <1 0 × 1377 1 17 0 <<1	history1	history2
ASDOM	STM D5185m STM D5185m	>230 >2 >5 >2 >5 >65 >55 >85 >5	95 <1 0 <1 0 137 1 17 0 <1		
Asom Asom Asom Asom Asom Asom Asom Asom	GTM D5185m	>2 >5 >2 >5 >65 >55 >85 >5	<1 0 <1 0 137 1 17 0 <1		
ASDOM	STM D5185m STM D5185m STM D5185m STM D5185m STM D5185m STM D5185m STM D5185m STM D5185m STM D5185m STM D5185m	>5 >2 >5 >65 >65 >55 >85 >5	0 <1 0 ▲ 137 1 17 0 <1	 	
ASDOM	STM D5185m STM D5185m STM D5185m STM D5185m STM D5185m STM D5185m STM D5185m STM D5185m STM D5185m STM D5185m	>2 >5 >65 >55 >85 >5	<1 0 137 1 17 0 <1	 	
AS model of a model of	STM D5185m STM D5185m STM D5185m STM D5185m STM D5185m STM D5185m STM D5185m STM D5185m	>5 >65 >55 >85 >5	0 ▲ 137 1 17 0 <1	 	
om AS om AS om AS om AS om AS om AS om AS	STM D5185m STM D5185m STM D5185m STM D5185m STM D5185m STM D5185m STM D5185m STM D5185m	>5 >65 >55 >85 >5	137 1 17 0 <1	 	
om AS om AS om AS om AS om AS om AS	GTM D5185m GTM D5185m GTM D5185m GTM D5185m GTM D5185m GTM D5185m	>65 >55 >85 >5	137 1 17 0 <1	 	
om AS om AS om AS om AS om AS	STM D5185m STM D5185m STM D5185m STM D5185m STM D5185m	>55 >85 >5	1 17 0 <1	 	
om AS om AS om AS om AS	STM D5185m STM D5185m STM D5185m STM D5185m	>85 >5	17 0 <1		
om AS om AS om AS	GTM D5185m GTM D5185m GTM D5185m	>5	0 <1		
om AS om AS	STM D5185m STM D5185m		<1		
om AS	STM D5185m				
l			U		
	method				
۵m ۵۹		limit/base	current	history1	history2
	STM D5185m	133	48		
om AS	STM D5185m	0	0		
om AS	STM D5185m	0	0		
om AS	STM D5185m		2		
om AS	STM D5185m	0	0		
om AS	STM D5185m	27	101		
	STM D5185m	293	217		
	STM D5185m	0	7		
		1050	1539		
I	method	limit/base	current	history1	history2
om AS	STM D5185m	>20	4 24		
om AS	STM D5185m		6		
om AS	STM D5185m	>20	<1		
	method	limit/base	current	history1	history2
alar *\	/isual	NONE	NONE		
alar *\	/isual	NONE	NONE		
alar *\	/isual	NONE	NONE		
alar *\	/isual	NONE	NONE		
alar *\	/isual	NONE	NONE		
		NONE	NONE		
		NORML	NORML		
		>0.1	NEG		
mu N					
	om Asom Asom Asom Asom Asom Asom Asom As	ann ASTM D5185m ASTM D5185m XIIIIIIIIIIIIIIIIIIIIIIIIIIIIIIIIIIII	ASTM D5185mImage: ASTM D5185mASTM D5185m27ASTM D5185m293ASTM D5185m293ASTM D5185m293ASTM D5185m1050ASTM D5185m1050ASTM D5185m20ASTM D5185m>20ASTM D5185mNONEASTM D5185mNONEASTM D5185mNONEASTM D5185mNORMASTM D5185mNORMLASTM D5185mNORML <t< td=""><td>ASTM D5185m2ASTM D5185m00ASTM D5185m27101ASTM D5185m293217ASTM D5185m07ASTM D5185m07ASTM D5185m10501539ASTM D5185m20024ASTM D5185m>2024ASTM D5185m>204ASTM D5185m>20<1</td>ASTM D5185m>20<1</t<>	ASTM D5185m2ASTM D5185m00ASTM D5185m27101ASTM D5185m293217ASTM D5185m07ASTM D5185m07ASTM D5185m10501539ASTM D5185m20024ASTM D5185m>2024ASTM D5185m>204ASTM D5185m>20<1	ASTM D5185m2ASTM D5185m00ormASTM D5185m27101ormASTM D5185m293217ormASTM D5185m07ormASTM D5185m07ormASTM D5185m10501539ormASTM D5185m>2024ormASTM D5185m>20<1



OIL ANALYSIS REPORT

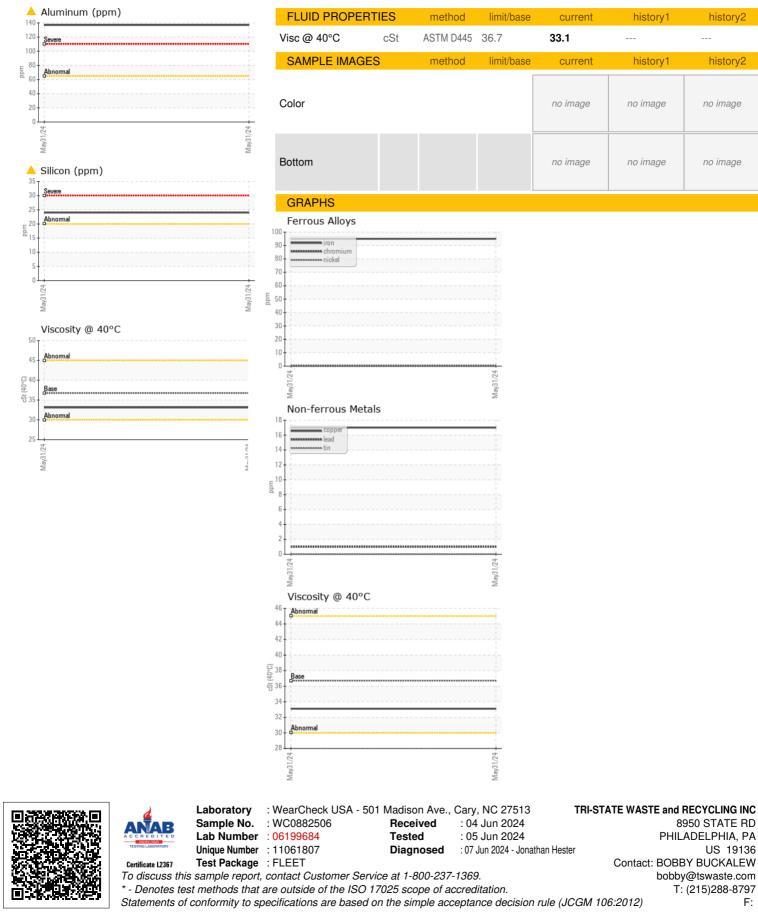

Report Id: TRIPHIPA [WUSCAR] 06199684 (Generated: 06/07/2024 12:16:09) Rev: 1

Submitted By: BOBBY BUCKALEW

Page 2 of 2

F:

US 19136

history2

history2

no image

no image