





OIL ANALYSIS REPORT

Area
Action Newark
 Machine Id
CATERPILLAR 5659
 Component
Diesel Engine
 Fluid
DIESEL ENGINE OIL SAE 40 (--- GAL)

Sample Rating Trend

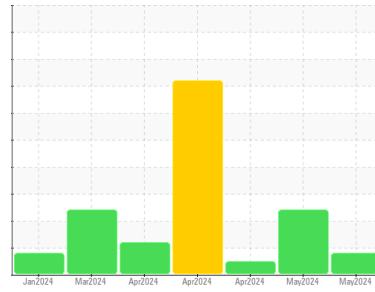

DIAGNOSIS

- Recommendation**
No corrective action is recommended at this time. Resample at the next service interval to monitor.
- Wear**
All component wear rates are normal.
- Contamination**
Light fuel dilution occurring. No other contaminants were detected in the oil.
- Fluid Condition**
The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

SAMPLE INFORMATION

method	limit/base	current	history1	history2
Sample Number	Client Info	WC0912310	WC0912314	WC0924897
Sample Date	Client Info	25 May 2024	11 May 2024	19 Apr 2024
Machine Age	hrs	Client Info	4398	4118
Oil Age	hrs	Client Info	0	0
Oil Changed	Client Info	N/A	N/A	N/A
Sample Status		MARGINAL	SEVERE	NORMAL

CONTAMINATION

method	limit/base	current	history1	history2
Water	WC Method >0.2	NEG	NEG	NEG
Glycol	WC Method	NEG	NEG	NEG

WEAR METALS

method	limit/base	current	history1	history2
Iron	ppm ASTM D5185m >100	2	10	15
Chromium	ppm ASTM D5185m >20	0	<1	0
Nickel	ppm ASTM D5185m >2	0	0	0
Titanium	ppm ASTM D5185m >2	0	<1	0
Silver	ppm ASTM D5185m >2	0	<1	0
Aluminum	ppm ASTM D5185m >25	1	5	0
Lead	ppm ASTM D5185m >40	0	1	<1
Copper	ppm ASTM D5185m >330	0	<1	4
Tin	ppm ASTM D5185m >15	0	<1	<1
Vanadium	ppm ASTM D5185m	0	<1	0
Cadmium	ppm ASTM D5185m	0	0	0

ADDITIVES

method	limit/base	current	history1	history2
Boron	ppm ASTM D5185m 250	7	8	13
Barium	ppm ASTM D5185m 10	0	0	<1
Molybdenum	ppm ASTM D5185m 100	47	49	57
Manganese	ppm ASTM D5185m	0	0	2
Magnesium	ppm ASTM D5185m 450	749	721	829
Calcium	ppm ASTM D5185m 3000	1006	1003	1231
Phosphorus	ppm ASTM D5185m 1150	914	1031	1036
Zinc	ppm ASTM D5185m 1350	1096	1093	1211
Sulfur	ppm ASTM D5185m 4250	3373	3180	3650

CONTAMINANTS

method	limit/base	current	history1	history2
Silicon	ppm ASTM D5185m >25	2	4	4
Sodium	ppm ASTM D5185m >216	<1	1	2
Potassium	ppm ASTM D5185m >20	0	2	0
Fuel	% ASTM D3524 >5	▲ 4.5	▲ 8.5	<1.0

INFRA-RED





method	limit/base	current	history1	history2
Soot %	% *ASTM D7844 >3	0.2	0.4	0.5
Nitration	Abs/cm *ASTM D7624 >20	5.8	7.5	6.0
Sulfation	Abs/.1mm *ASTM D7415 >30	17.3	17.9	18.2

FLUID DEGRADATION

method	limit/base	current	history1	history2
Oxidation	Abs/.1mm *ASTM D7414 >25	12.3	12.7	13.3
Base Number (BN)	mg KOH/g ASTM D2896 8.5	8.3	7.2	8.4











OIL ANALYSIS REPORT

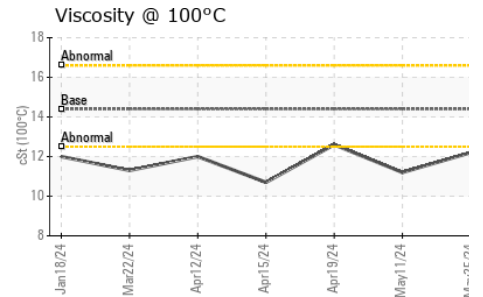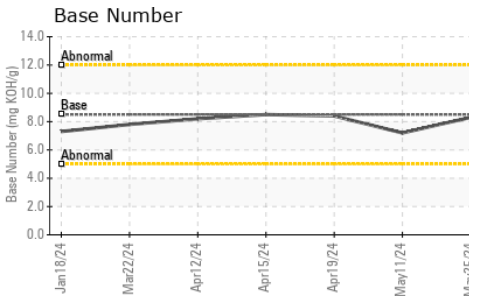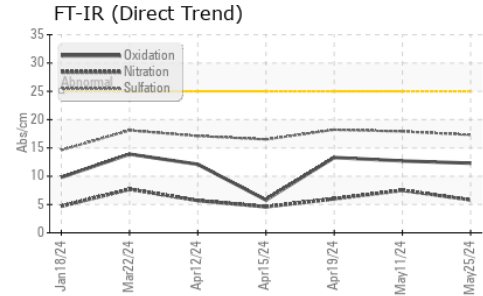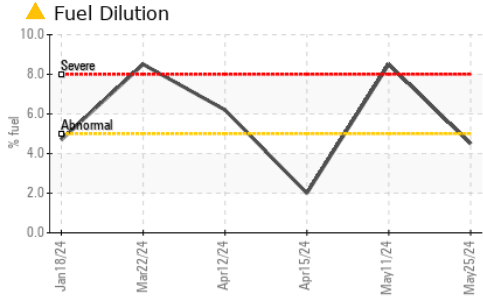

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2	
Visc @ 100°C	cSt	ASTM D445	14.4	12.2	▲ 11.2	12.6

GRAPHS

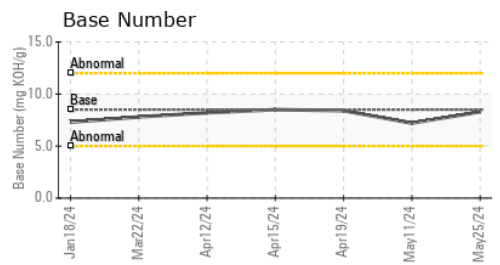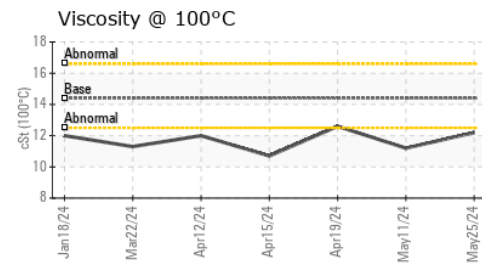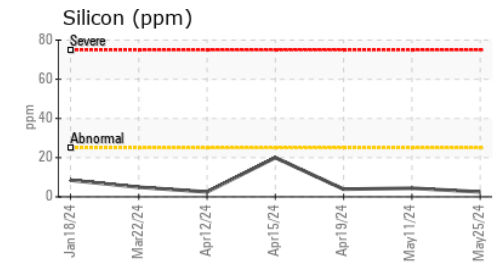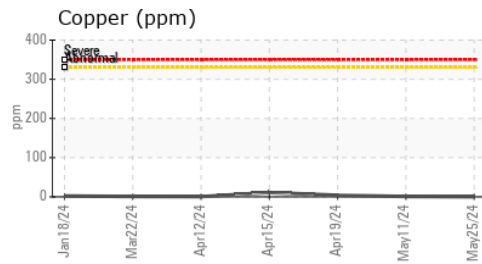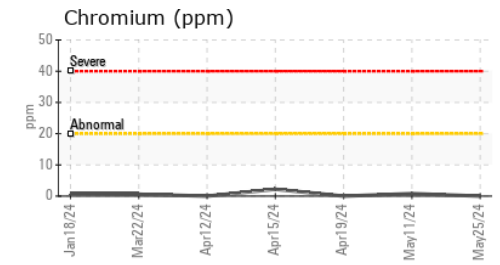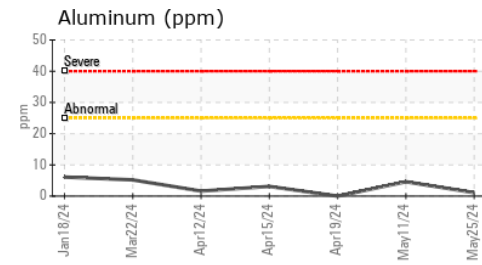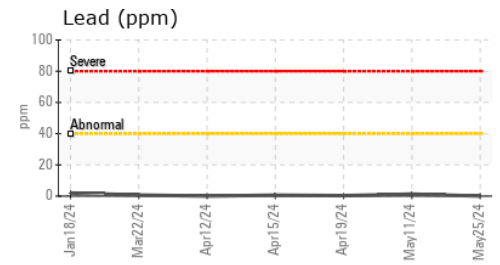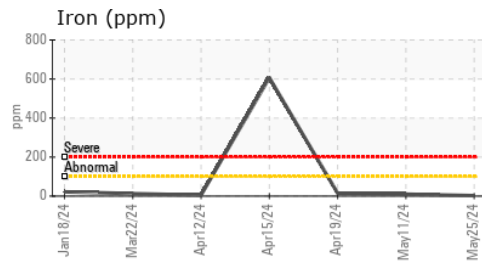

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : WC0912310 **Received** : 05 Jun 2024
Lab Number : 06199862 **Tested** : 06 Jun 2024
Unique Number : 11061985 **Diagnosed** : 06 Jun 2024 - Wes Davis
Test Package : MOB 1 (Additional Tests: PercentFuel, TBN)

INTERSTATE WASTE-NEWARK
 110 EVERGREEN AVE, BAY 3
 NEWARK, NJ
 US 07114
 Contact: Robert Witynski
 RWitynski@interstatewaste.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.
 * - Denotes test methods that are outside of the ISO 17025 scope of accreditation.
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)