




OIL ANALYSIS REPORT

Sample Rating Trend

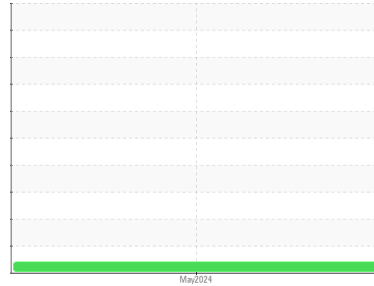

VISCOSITY



Machine Id

09.20 []

Component

Diesel Engine

Fluid

MOBIL DELVAC 1300 SUPER15W40 (--- GAL)

DIAGNOSIS

● Recommendation

No corrective action is recommended at this time. Resample at the next service interval to monitor.

Wear

Metal levels are typical for a new component breaking in.

Contamination

Fuel content negligible. There is no indication of any contamination in the oil.

● Fluid Condition

The oil viscosity is lower than normal. The BN result indicates that there is suitable alkalinity remaining in the oil. Confirm oil type.

SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		WC0886958	---	---
Sample Date	Client Info		29 May 2024	---	---
Machine Age	hrs	Client Info	525	---	---
Oil Age	hrs	Client Info	525	---	---
Oil Changed	Client Info		Not Chngd	---	---
Sample Status			ATTENTION	---	---

CONTAMINATION

	method	limit/base	current	history1	history2
Water	WC Method	>0.2	NEG	---	---
Glycol	WC Method		NEG	---	---

WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >100	46	---	---
Chromium	ppm	ASTM D5185m >20	1	---	---
Nickel	ppm	ASTM D5185m >4	0	---	---
Titanium	ppm	ASTM D5185m	0	---	---
Silver	ppm	ASTM D5185m >3	0	---	---
Aluminum	ppm	ASTM D5185m >20	16	---	---
Lead	ppm	ASTM D5185m >40	1	---	---
Copper	ppm	ASTM D5185m >330	31	---	---
Tin	ppm	ASTM D5185m >15	<1	---	---
Vanadium	ppm	ASTM D5185m	0	---	---
Cadmium	ppm	ASTM D5185m	0	---	---

ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m 0	46	---	---
Barium	ppm	ASTM D5185m 0	5	---	---
Molybdenum	ppm	ASTM D5185m 0	10	---	---
Manganese	ppm	ASTM D5185m	5	---	---
Magnesium	ppm	ASTM D5185m 0	728	---	---
Calcium	ppm	ASTM D5185m	1341	---	---
Phosphorus	ppm	ASTM D5185m	710	---	---
Zinc	ppm	ASTM D5185m	843	---	---
Sulfur	ppm	ASTM D5185m	3100	---	---

CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >25	41	---	---
Sodium	ppm	ASTM D5185m	5	---	---
Potassium	ppm	ASTM D5185m >20	59	---	---
Fuel	%	ASTM D3524 >5	0.5	---	---

INFRA-RED





	method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844 >3	0.2	---	---
Nitration	Abs/cm	*ASTM D7624 >20	9.7	---	---
Sulfation	Abs/.1mm	*ASTM D7415 >30	22.0	---	---

FLUID DEGRADATION

	method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	*ASTM D7414 >25	20.4	---	---
Base Number (BN)	mg KOH/g	ASTM D2896 9.4	6.4	---	---







OIL ANALYSIS REPORT

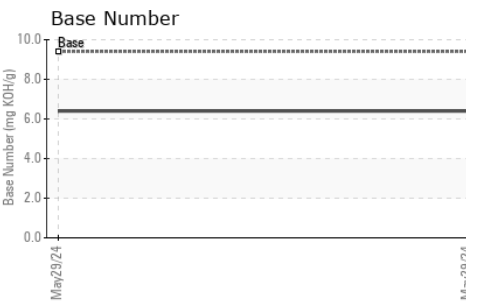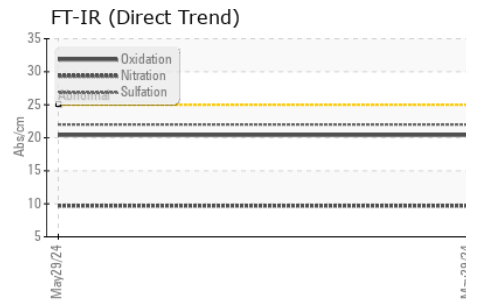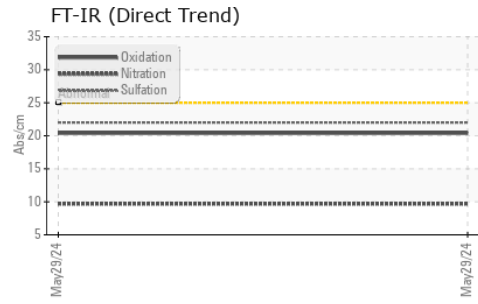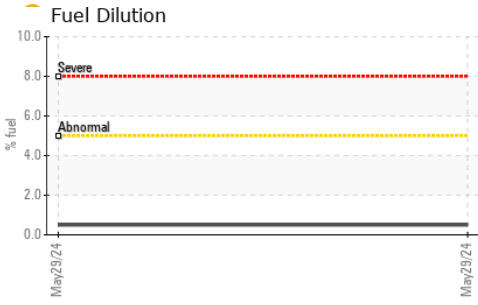

VISUAL	method	limit/base	current	history1	history2	
White Metal	scalar	*Visual	NONE	NONE	---	---
Yellow Metal	scalar	*Visual	NONE	NONE	---	---
Precipitate	scalar	*Visual	NONE	NONE	---	---
Silt	scalar	*Visual	NONE	NONE	---	---
Debris	scalar	*Visual	NONE	NONE	---	---
Sand/Dirt	scalar	*Visual	NONE	NONE	---	---
Appearance	scalar	*Visual	NORML	NORML	---	---
Odor	scalar	*Visual	NORML	NORML	---	---
Emulsified Water	scalar	*Visual	>0.2	NEG	---	---
Free Water	scalar	*Visual		NEG	---	---

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D445 14	● 11.4	---	---

GRAPHS

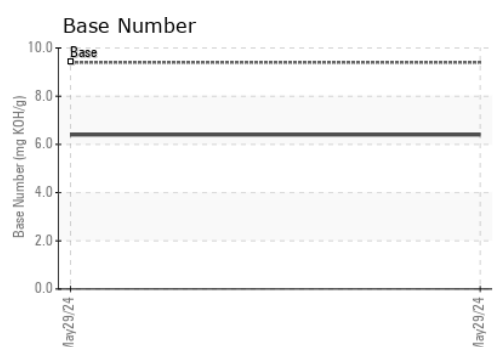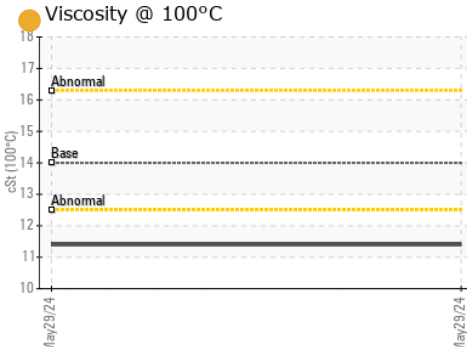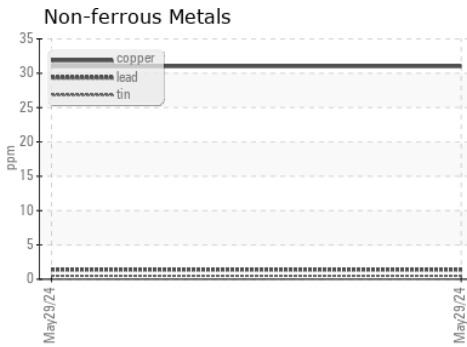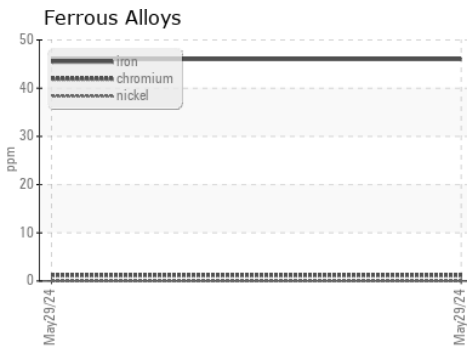

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : WC0886958 **Received** : 05 Jun 2024
Lab Number : 06199954 **Tested** : 06 Jun 2024
Unique Number : 11062077 **Diagnosed** : 07 Jun 2024 - Sean Felton
Test Package : CONST (Additional Tests: FuelDilution, PercentFuel, TBN)

SHERWOOD CONSTRUCTION CO INC
 3219 WEST MAY ST
 WICHITA, KS
 US 67213
 Contact: SHAWN SOUTH
 shawn.south@sherwood.net

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T: x:
F: x: