





OIL ANALYSIS REPORT

Area
OKLAHOMA/102/EG - OTHER SERVICE
 Machine Id
05.71 [OKLAHOMA^102^EG - OTHER SERVICE]
 Component
Diesel Engine
 Fluid
MOBIL DELVAC 1300 SUPER15W40 (--- GAL)

Sample Rating Trend

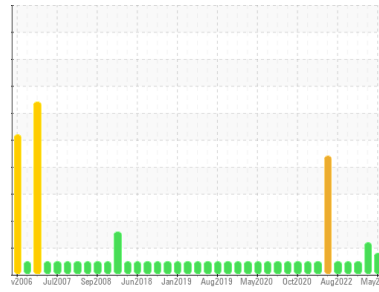

DIAGNOSIS

Recommendation
 The oil change at the time of sampling has been noted. Resample at the next service interval to monitor. No other corrective action is recommended at this time.

Wear
 All component wear rates are normal.

Contamination
 Light fuel dilution occurring. No other contaminants were detected in the oil.

Fluid Condition
 The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

SAMPLE INFORMATION

| | method | limit/base | current | history1 | history2 |
|---------------|-------------|-------------|--------------------|-------------|-------------|
| Sample Number | Client Info | | WC0908859 | WC0821696 | WC0778255 |
| Sample Date | Client Info | | 28 May 2024 | 22 Jun 2023 | 22 Feb 2023 |
| Machine Age | hrs | Client Info | 522745 | 1008 | 966 |
| Oil Age | hrs | Client Info | 12711 | 571 | 966 |
| Oil Changed | Client Info | | Changed | Changed | Changed |
| Sample Status | | | MARGINAL | ABNORMAL | NORMAL |

CONTAMINATION

| | method | limit/base | current | history1 | history2 |
|--------|-----------|------------|------------|----------|----------|
| Water | WC Method | | NEG | NEG | NEG |
| Glycol | WC Method | | NEG | NEG | NEG |

WEAR METALS

| | method | limit/base | current | history1 | history2 |
|----------|--------|-------------|--------------|----------|----------|
| Iron | ppm | ASTM D5185m | 23 | 19 | 15 |
| Chromium | ppm | ASTM D5185m | <1 | <1 | <1 |
| Nickel | ppm | ASTM D5185m | 0 | <1 | <1 |
| Titanium | ppm | ASTM D5185m | 0 | <1 | <1 |
| Silver | ppm | ASTM D5185m | 0 | <1 | 0 |
| Aluminum | ppm | ASTM D5185m | 2 | <1 | 2 |
| Lead | ppm | ASTM D5185m | 0 | <1 | <1 |
| Copper | ppm | ASTM D5185m | <1 | 1 | 1 |
| Tin | ppm | ASTM D5185m | 0 | <1 | 0 |
| Vanadium | ppm | ASTM D5185m | 0 | 0 | <1 |
| Cadmium | ppm | ASTM D5185m | 0 | 0 | 0 |

ADDITIVES

| | method | limit/base | current | history1 | history2 |
|------------|--------|-------------|--------------|----------|----------|
| Boron | ppm | ASTM D5185m | 31 | 48 | 32 |
| Barium | ppm | ASTM D5185m | 0 | 0 | 0 |
| Molybdenum | ppm | ASTM D5185m | 39 | 43 | 32 |
| Manganese | ppm | ASTM D5185m | <1 | <1 | <1 |
| Magnesium | ppm | ASTM D5185m | 453 | 452 | 363 |
| Calcium | ppm | ASTM D5185m | 1414 | 1640 | 1314 |
| Phosphorus | ppm | ASTM D5185m | 759 | 676 | 529 |
| Zinc | ppm | ASTM D5185m | 947 | 850 | 697 |
| Sulfur | ppm | ASTM D5185m | 3242 | 2385 | 1734 |

CONTAMINANTS

| | method | limit/base | current | history1 | history2 |
|-----------|--------|-------------|--------------|----------|----------|
| Silicon | ppm | ASTM D5185m | 8 | 7 | 6 |
| Sodium | ppm | ASTM D5185m | 3 | 0 | 2 |
| Potassium | ppm | ASTM D5185m | 0 | 2 | 1 |
| Fuel | % | ASTM D3524 | ▲ 3.3 | ▲ 4.2 | <1.0 |

INFRA-RED





| | method | limit/base | current | history1 | history2 |
|-----------|----------|-------------|-------------|----------|----------|
| Soot % | % | *ASTM D7844 | 0.2 | 0.2 | 0.2 |
| Nitration | Abs/cm | *ASTM D7624 | 8.9 | 11.6 | 10.3 |
| Sulfation | Abs/.1mm | *ASTM D7415 | 21.7 | 25.7 | 23.8 |

FLUID DEGRADATION

| | method | limit/base | current | history1 | history2 |
|------------------|----------|-------------|-------------|----------|----------|
| Oxidation | Abs/.1mm | *ASTM D7414 | 21.0 | 29.3 | 27.5 |
| Base Number (BN) | mg KOH/g | ASTM D2896 | 8.3 | 8.1 | 5.9 |







OIL ANALYSIS REPORT

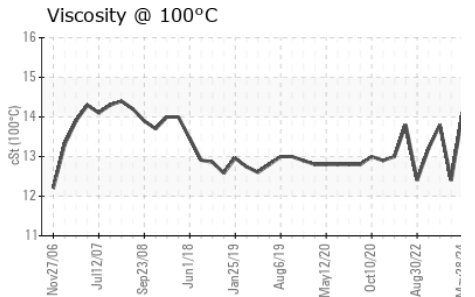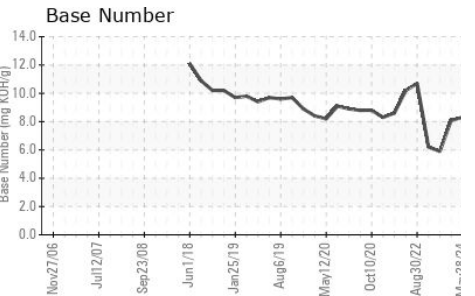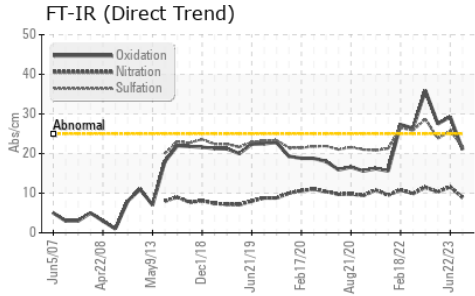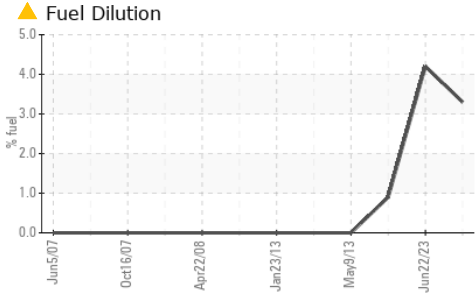

| VISUAL | method | limit/base | current | history1 | history2 |
|------------------|--------|------------|---------|----------|----------|
| White Metal | scalar | *Visual | NONE | NONE | NONE |
| Yellow Metal | scalar | *Visual | NONE | NONE | NONE |
| Precipitate | scalar | *Visual | NONE | NONE | NONE |
| Silt | scalar | *Visual | NONE | NONE | NONE |
| Debris | scalar | *Visual | NONE | NONE | NONE |
| Sand/Dirt | scalar | *Visual | NONE | NONE | NONE |
| Appearance | scalar | *Visual | NORML | NORML | NORML |
| Odor | scalar | *Visual | NORML | NORML | NORML |
| Emulsified Water | scalar | *Visual | NEG | NEG | NEG |
| Free Water | scalar | *Visual | NEG | NEG | NEG |

| FLUID PROPERTIES | method | limit/base | current | history1 | history2 |
|------------------|--------|------------|---------|----------|----------|
| Visc @ 100°C | cSt | ASTM D445 | 14.1 | ▲ 12.4 | 13.8 |

GRAPHS

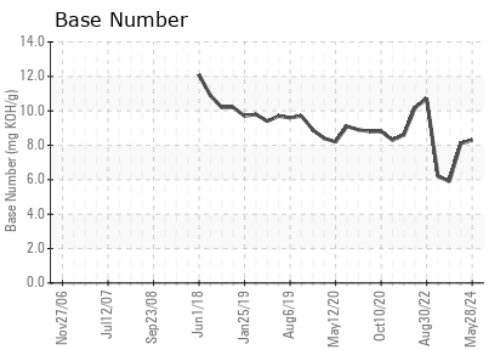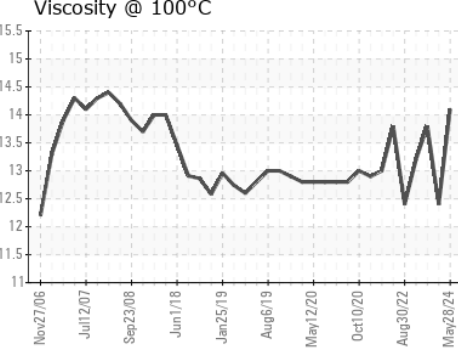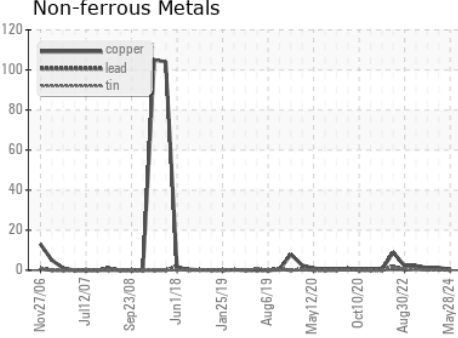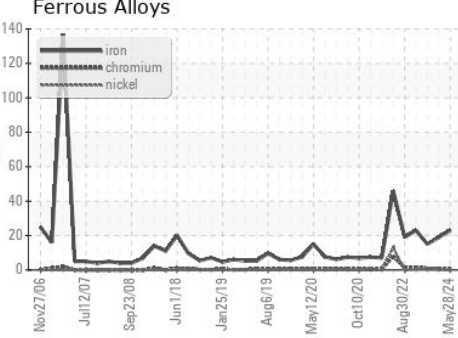

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : WC0908859 **Received** : 05 Jun 2024
Lab Number : 06199960 **Tested** : 06 Jun 2024
Unique Number : 11062083 **Diagnosed** : 06 Jun 2024 - Wes Davis
Test Package : CONST (Additional Tests: PercentFuel, TBN)

SHERWOOD CONSTRUCTION CO INC
 3219 WEST MAY ST
 WICHITA, KS
 US 67213
 Contact: DOUG KING
 doug.king@sherwood.net
 T: (316)617-3161
 F: x:

To discuss this sample report, contact Customer Service at 1-800-237-1369.
 * - Denotes test methods that are outside of the ISO 17025 scope of accreditation.
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)