




OIL ANALYSIS REPORT

Sample Rating Trend

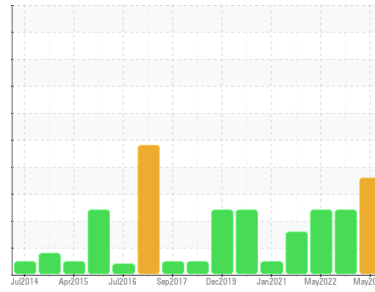

Area
OKLAHOMA/102/EG - DOZER
 Machine Id
36.18L [OKLAHOMA^102^EG - DOZER]
 Component
Hydraulic System
 Fluid
MOBIL MOBILTRANS AST 30 (25 GAL)

DIAGNOSIS

Recommendation

We advise that you check all areas where dirt can enter the system. Oil and filter change at the time of sampling has been noted. We advise that you inspect for possible wear. Resample at the next service interval to monitor. We were unable to perform a particle count due to metal particles present in this sample.

Wear

Moderate concentration of visible metal present. All component wear rates are normal.

Contamination

Elemental levels of silicon (Si) and aluminum (Al) indicate alumina-silicate (coarse dirt) ingress.

Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		WC0908920	WC0686980	WC0686857
Sample Date	Client Info		28 May 2024	07 Jun 2022	16 May 2022
Machine Age	hrs	Client Info	14330	12569	12504
Oil Age	hrs	Client Info	1000	2062	1997
Oil Changed	Client Info		Changed	Not Changd	Not Changd
Sample Status			ABNORMAL	ABNORMAL	ABNORMAL

CONTAMINATION

	method	limit/base	current	history1	history2
Water	WC Method	>0.1	NEG	NEG	NEG

WEAR METALS

	method	limit/base	current	history1	history2	
Iron	ppm	ASTM D5185m	>20	15	11	12
Chromium	ppm	ASTM D5185m	>10	1	<1	<1
Nickel	ppm	ASTM D5185m	>10	0	0	0
Titanium	ppm	ASTM D5185m		<1	<1	<1
Silver	ppm	ASTM D5185m		0	0	0
Aluminum	ppm	ASTM D5185m	>10	12	11	10
Lead	ppm	ASTM D5185m	>10	0	<1	<1
Copper	ppm	ASTM D5185m	>75	5	2	3
Tin	ppm	ASTM D5185m	>10	<1	<1	0
Antimony	ppm	ASTM D5185m		---	---	---
Vanadium	ppm	ASTM D5185m		0	0	0
Cadmium	ppm	ASTM D5185m		0	0	0

ADDITIVES

	method	limit/base	current	history1	history2	
Boron	ppm	ASTM D5185m		42	47	47
Barium	ppm	ASTM D5185m		<1	0	0
Molybdenum	ppm	ASTM D5185m		0	<1	1
Manganese	ppm	ASTM D5185m		<1	<1	<1
Magnesium	ppm	ASTM D5185m		19	19	28
Calcium	ppm	ASTM D5185m		3055	2958	3044
Phosphorus	ppm	ASTM D5185m		1089	986	1048
Zinc	ppm	ASTM D5185m		1232	1220	1295
Sulfur	ppm	ASTM D5185m		5433	4822	4309

CONTAMINANTS

	method	limit/base	current	history1	history2	
Silicon	ppm	ASTM D5185m	>20	▲ 29	▲ 22	▲ 21
Sodium	ppm	ASTM D5185m		2	2	0
Potassium	ppm	ASTM D5185m	>20	3	1	4


FLUID CLEANLINESS

	method	limit/base	current	history1	history2
Particles >4µm	ASTM D7647		---	5778	1227
Particles >6µm	ASTM D7647	>2500	---	187	112
Particles >14µm	ASTM D7647	>640	---	17	9
Particles >21µm	ASTM D7647	>160	---	5	2
Particles >38µm	ASTM D7647	>40	---	0	0
Particles >71µm	ASTM D7647	>10	---	0	0
Oil Cleanliness	ISO 4406 (c)	>--/18/16	---	20/15/11	17/14/10




OIL ANALYSIS REPORT


▲ Silicon (ppm)

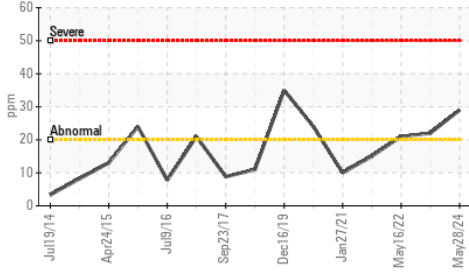


● Aluminum (ppm)

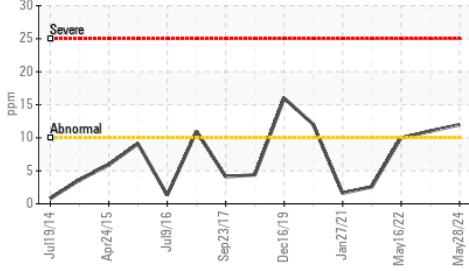

Acid Number

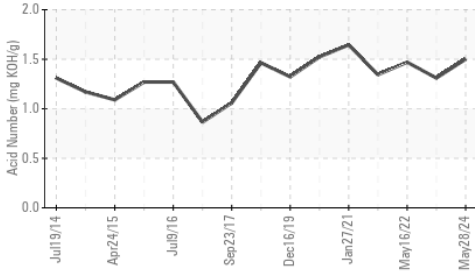

Viscosity @ 40°C

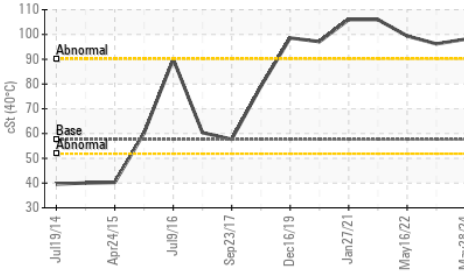


FLUID DEGRADATION

	method	limit/base	current	history1	history2	
Acid Number (AN)	mg KOH/g	ASTM D8045	1.50	1.31	1.47	
VISUAL		method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	▲ MODER	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.1	NEG	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG	NEG

FLUID PROPERTIES


	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D445	98.1	96.2	99.4

SAMPLE IMAGES

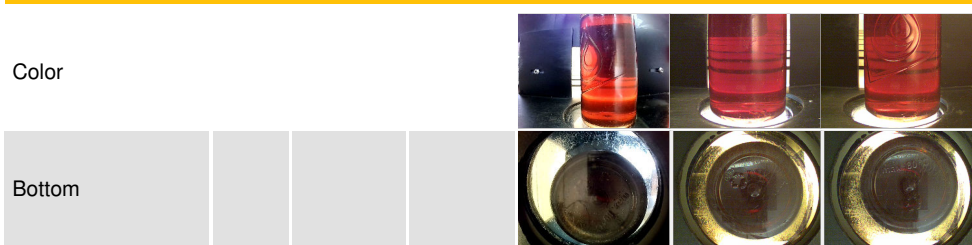


GRAPHS


Ferrous Alloys

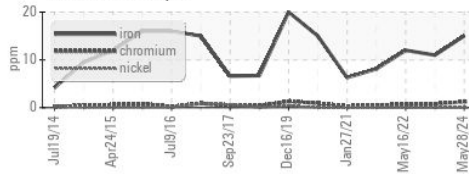


Non-ferrous Metals

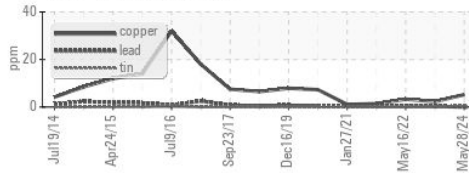

Viscosity @ 40°C

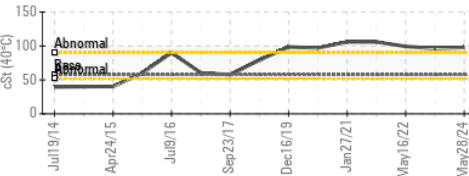

Acid Number

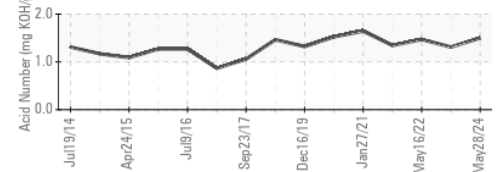

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513

Sample No. : WC0908920

Lab Number : 06200064

Unique Number : 11062187

Test Package : CONST

Received : 05 Jun 2024

Tested : 07 Jun 2024

Diagnosed : 07 Jun 2024 - Jonathan Hester

SHERWOOD CONSTRUCTION CO INC

3219 WEST MAY ST

WICHITA, KS

US 67213

Contact: DOUG KING

doug.king@sherwood.net

T: (316)617-3161

F: x:

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)