


OIL ANALYSIS REPORT



MVD

B-03-411 Pressure Displacement Blower Drive End

Drive End Compressor

GARDNER DENVER AEON PD (--- GAL)

DIAGNOSIS

Recommendation

No corrective action is recommended at this time. Resample at the next service interval to monitor.

All component wear rates are normal.

Contamination

There is a high amount of silt (particulates < 14 microns in size) present in the oil.

Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

мау2023 Jun2023 Smg2023 Осе2023 Осе2023 Feb2024 Мау2024								
SAMPLE INFORM	MATION	method	limit/base	current	history1	history2		
Sample Number		Client Info		TWC0000006	WC0886365	WC0886366		
Sample Date		Client Info		31 May 2024	02 May 2024	26 Mar 2024		
Machine Age	hrs	Client Info		0	0	0		
Oil Age	hrs	Client Info		0	0	0		
Oil Changed		Client Info		N/A	N/A	N/A		
Sample Status				ABNORMAL	ABNORMAL	ABNORMAL		
CONTAMINATION	N	method	limit/base	current	history1	history2		
Water		WC Method	>0.1	NEG	NEG	NEG		
WEAR METALS		method	limit/base	current	history1	history2		
Iron	ppm	ASTM D5185m	>50	23	51	50		
Chromium	ppm	ASTM D5185m	>10	0	<1	<1		
Nickel	ppm	ASTM D5185m		0	0	0		
Titanium	ppm	ASTM D5185m		0	<1	<1		
Silver	ppm	ASTM D5185m		0	0	0		
Aluminum	ppm	ASTM D5185m	>25	<1	2	3		
Lead	ppm	ASTM D5185m	>25	0	<1	<1		
Copper	ppm	ASTM D5185m	>50	3	6	7		
Tin	ppm	ASTM D5185m	>15	<1	<1	1		
Vanadium	ppm	ASTM D5185m		0	0	<1		
Cadmium	ppm	ASTM D5185m		0	0	<1		
ADDITIVES		method	limit/base	current	history1	history2		
Boron	ppm	ASTM D5185m		0	0	0		
Barium	ppm	ASTM D5185m		0	0	0		
Molybdenum	ppm	ASTM D5185m		0	<1	0		
Manganese	ppm	ASTM D5185m		<1	<1	<1		
Magnesium	ppm	ASTM D5185m		0	<1	<1		
Calcium	ppm	ASTM D5185m		2	3	4		
Phosphorus	ppm	ASTM D5185m		732	744	694		
Zinc	ppm	ASTM D5185m		6	2	3		
Sulfur	ppm	ASTM D5185m		733	1028	884		
CONTAMINANTS		method	limit/base	current	history1	history2		
Silicon	ppm	ASTM D5185m	>25	13	7	9		
Sodium	ppm	ASTM D5185m		0	0	0		
Potassium	ppm	ASTM D5185m		1	<1	<1		
FLUID CLEANLIN	IESS	method	limit/base	current	history1	history2		
Particles >4µm		ASTM D7647	>10000	^ 74782	<u>100794</u>	<u>▲</u> 173677		
Particles >6µm		ASTM D7647	>2500	3589	4451	<u>\$\times\$ 25454</u>		
Particles >14μm		ASTM D7647	>320	36	99	▲ 342		
Particles >21μm		ASTM D7647	>80	8	13	<u>^</u> 89		
Particles >38μm		ASTM D7647	>20	0	0	3		
Particles >71μm		ASTM D7647	>4	0	0	0		
Oil Cleanliness		ISO 4406 (c)	>20/18/15	<u>23/19/12</u>	<u>24/19/14</u>	<u>\$\rightarrow\$ 25/22/16</u>		
FLUID DEGRADA	TION	method	limit/base	current	history1	history2		

Acid Number (AN)

mg KOH/g ASTM D8045


1.00


1.07

1.23



OIL ANALYSIS REPORT






Acid Number


1.60

200



VISUAL		method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE	LIGHT
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.1	NEG	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG	NEG
FLUID PROPERTIES		method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D445	214	208	209	208
SAMPLE IMAGES		method	limit/base	current	history1	history2



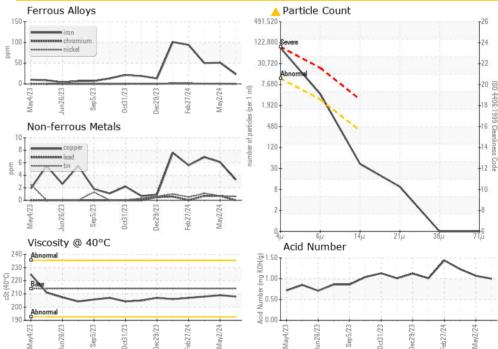





Certificate 12367

Laboratory Sample No.

Test Package : PLANT

Lab Number : 06200119 Unique Number : 11062242

: TWC0000006

: WearCheck USA - 501 Madison Ave., Cary, NC 27513 Received : 05 Jun 2024 **Tested** : 06 Jun 2024 Diagnosed

: 07 Jun 2024 - Don Baldridge

GEVO Inc. 2498 250th Street Doon, IA US 51235

Contact: Service Manager

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:

F: