

OIL ANALYSIS REPORT


Area

Recycled Fiber SF Disc Filter Gearbox

Gearbox

Cluid

MOBIL SHC 634 (--- GAL)





DIAGNOSIS

Recommendation

Resample at the next service interval to monitor. NOTE: Please provide information regarding reservoir capacity, filter type and micron rating with next sample.

Wear

All component wear rates are normal.

Contamination

The system cleanliness is acceptable for your target ISO 4406 cleanliness code. The water content is negligible. The system and fluid cleanliness is acceptable.


Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

| | | Jun2023 | Aug2023 | Jan 2024 Mar 2024 | Jun2024 | |
|------------------|----------|--------------|------------|-------------------|-------------|-------------------|
| SAMPLE INFORM | MATION | method | limit/base | current | history1 | history2 |
| Sample Number | | Client Info | | WC0776510 | WC0776523 | WC0776488 |
| Sample Date | | Client Info | | 04 Jun 2024 | 04 Mar 2024 | 26 Jan 2024 |
| Machine Age | hrs | Client Info | | 0 | 0 | 0 |
| Oil Age | hrs | Client Info | | 0 | 0 | 0 |
| Oil Changed | | Client Info | | N/A | N/A | N/A |
| Sample Status | | | | NORMAL | ATTENTION | ABNORMAL |
| WEAR METALS | | method | limit/base | current | history1 | history2 |
| Iron | ppm | ASTM D5185m | >200 | 8 | 0 | 138 |
| Chromium | ppm | ASTM D5185m | >15 | 0 | 0 | 1 |
| Nickel | ppm | ASTM D5185m | >15 | 0 | 0 | 0 |
| Titanium | ppm | ASTM D5185m | | 0 | 0 | 0 |
| Silver | ppm | ASTM D5185m | | 0 | 0 | 0 |
| Aluminum | ppm | ASTM D5185m | >25 | 0 | 0 | 2 |
| Lead | ppm | ASTM D5185m | >100 | 0 | 0 | 0 |
| Copper | ppm | ASTM D5185m | >200 | <1 | 0 | 1 |
| Tin | ppm | ASTM D5185m | >25 | <1 | 0 | 0 |
| Vanadium | ppm | ASTM D5185m | | 0 | 0 | 0 |
| Cadmium | ppm | ASTM D5185m | | 0 | 0 | 0 |
| ADDITIVES | | method | limit/base | current | history1 | history2 |
| Boron | ppm | ASTM D5185m | | 0 | 0 | 4 |
| Barium | ppm | ASTM D5185m | | 0 | 1 | 7 |
| Molybdenum | ppm | ASTM D5185m | | 0 | 0 | 55 |
| Manganese | ppm | ASTM D5185m | | <1 | 0 | 2 |
| Magnesium | ppm | ASTM D5185m | | 0 | 1 | <1 |
| Calcium | ppm | ASTM D5185m | | 1 | 1 | 7 |
| Phosphorus | ppm | ASTM D5185m | | 513 | 457 | 447 |
| Zinc | ppm | ASTM D5185m | | 0 | 7 | 11 |
| Sulfur | ppm | ASTM D5185m | | 320 | 230 | 4447 |
| CONTAMINANTS | | method | limit/base | current | history1 | history2 |
| Silicon | ppm | ASTM D5185m | >50 | 26 | 22 | 5 |
| Sodium | ppm | ASTM D5185m | | 0 | 0 | 4 |
| Potassium | ppm | ASTM D5185m | >20 | 1 | 0 | 2 |
| Water | % | ASTM D6304 | >0.2 | 0.003 | 0.005 | 0.008 |
| ppm Water | ppm | ASTM D6304 | >2000 | 33 | 52 | 90 |
| FLUID CLEANLIN | ESS | method | limit/base | current | history1 | history2 |
| Particles >4µm | | ASTM D7647 | >20000 | 17416 | 26952 | <u></u> 152504 |
| Particles >6µm | | ASTM D7647 | >5000 | 908 | 3858 | 47451 |
| Particles >14µm | | ASTM D7647 | >640 | 24 | 81 | ▲ 884 |
| Particles >21µm | | ASTM D7647 | >160 | 9 | 14 | 152 |
| Particles >38µm | | ASTM D7647 | >40 | 4 | 1 | 2 |
| Particles >71µm | | ASTM D7647 | >10 | 2 | 0 | 0 |
| Oil Cleanliness | | ISO 4406 (c) | >21/19/16 | 21/17/12 | 22/19/14 | <u>△</u> 24/23/17 |
| FLUID DEGRADA | TION | method | limit/base | current | history1 | history2 |
| Acid Number (AN) | mg KOH/g | ASTM D8045 | | 0.70 | 0.71 | 0.84 |



OIL ANALYSIS REPORT

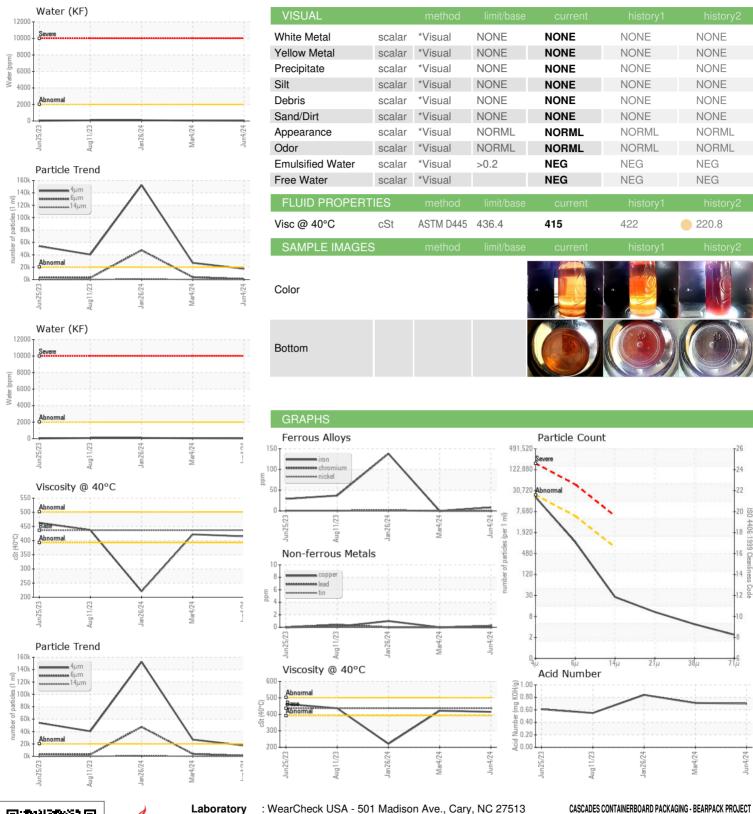



Certificate 12367

Laboratory Sample No. Lab Number

: WC0776510 : 06200137 Unique Number : 11062260 Test Package : PLANT

: WearCheck USA - 501 Madison Ave., Cary, NC 27513 Received : 05 Jun 2024 **Tested** : 06 Jun 2024

Diagnosed : 06 Jun 2024 - Wes Davis

10026 OLD RIDGE ROAD ASHLAND, VA

US 23005 Contact: MARC-ANDRE HUBERT marc-andre_hubert@cascades.com

To discuss this sample report, contact Customer Service at 1-800-237-1369. st - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:

F: