

OIL ANALYSIS REPORT

Machine Id INGERSOLL RAND R1601-A125 1 I/R (S/N V3139V17083)

Compressor Fluid

USPI MAX FG AIR 46 (--- GAL)

Recommendation

Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

There is no indication of any contamination in the oil. The amount and size of particulates present in the system are acceptable.

Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.


		p2018 Jul20	19 Mar2020 Dec2020 J	un2021 Mar2022 Dec2022 Sep20	23 Mar2024	
SAMPLE INFOR	MATION	method	limit/base	current	history1	history2
Sample Number		Client Info		USPM36481	USPM36961	USPM30367
Sample Date		Client Info		04 Jun 2024	24 Mar 2024	10 Mar 2024
Machine Age	hrs	Client Info		0	0	0
Oil Age	hrs	Client Info		0	0	0
Oil Changed		Client Info		N/A	N/A	N/A
Sample Status				NORMAL	ABNORMAL	ABNORMAL
WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>50	0	0	0
Chromium	ppm	ASTM D5185m	>5	0	0	0
Nickel	ppm	ASTM D5185m		0	0	0
Titanium	ppm	ASTM D5185m		0	0	0
Silver	ppm	ASTM D5185m		0	0	0
Aluminum	ppm	ASTM D5185m	>15	0	0	0
_ead	ppm	ASTM D5185m	>65	0	0	0
Copper	ppm	ASTM D5185m	>65	0	0	0
Гin	ppm	ASTM D5185m	>10	<1	0	<1
Vanadium	ppm	ASTM D5185m		0	0	0
Cadmium	ppm	ASTM D5185m		0	0	0
ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	0	0	0	0
Barium	ppm	ASTM D5185m	0	0	0	0
Volybdenum	ppm	ASTM D5185m	0	0	0	0
Vanganese	ppm	ASTM D5185m		<1	0	0
Magnesium	ppm	ASTM D5185m	0	0	0	0
Calcium	ppm	ASTM D5185m	0	0	0	0
Phosphorus	ppm	ASTM D5185m	0	0	0	0
Zinc	ppm	ASTM D5185m	0	0	0	0
Sulfur	ppm	ASTM D5185m	0	0	0	3
CONTAMINANTS	6	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>35	<1	0	0
Sodium	ppm	ASTM D5185m		<1	0	0
Potassium	ppm	ASTM D5185m	>20	1	0	0
Nater	%	ASTM D6304	>0.1	0.015	0.007	0.008
opm Water	ppm	ASTM D6304	>1000	153	80	84
FLUID CLEANLIN	NESS	method	limit/base	current	history1	history2
Particles >4µm		ASTM D7647	>10000	469		
Particles >6µm		ASTM D7647	>2500	56		
Particles >14µm		ASTM D7647	>320	5		
Particles >21µm		ASTM D7647	>80	2		
Particles >38µm		ASTM D7647	>20	0		
Particles >71µm		ASTM D7647	>4	0		
Oil Cleanliness		ISO 4406 (c)	>20/18/15	16/13/10		
FLUID DEGRAD	ATION	method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D8045	0.16	0.15	0.088	0.11





Contact/Location: SERVICE MANAGER ? - SMIMID Page 1 of 2





OIL ANALYSIS REPORT













VISUAL		method	limit/base	current	history1	history2	
VISUAL		methou	IIIIII/Dase	Current	TIIStOLA	TIIStory2	
White Metal	scalar	*Visual	NONE	NONE	NONE	NONE	
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE	
Precipitate	scalar	*Visual	NONE	NONE	NONE	NONE	
Silt	scalar	*Visual	NONE	NONE	🔺 MODER	A MODER	
Debris	scalar	*Visual	NONE	NONE	NONE	NONE	
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE	
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML	
Odor	scalar	*Visual	NORML	NORML	NORML	NORML	
Emulsified Water	scalar	*Visual	>0.1	NEG	NEG	NEG	
Free Water	scalar	*Visual		NEG	NEG	NEG	
FLUID PROPERT	IES	method	limit/base	current	history1	history2	
Visc @ 40°C	cSt	ASTM D445	45.8	50.65	50.0	49.6	
SAMPLE IMAGES	3	method	limit/base	current	history1	history2	
Color				•			

Bottom

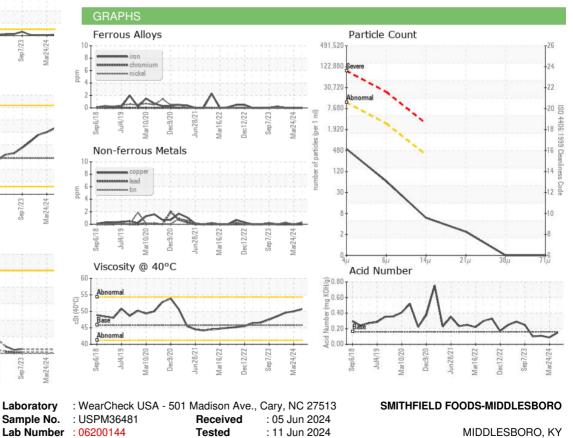



MIDDLESBORC), KY
	US
Contact: SERVICE MANA	GER

To discuss this sample report, contact Customer Service at 1-800-237-1369.

Unique Number : 11062267

Test Package : IND 2

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

Diagnosed

T: F:

Certificate 12367

Contact/Location: SERVICE MANAGER ? - SMIMID