




# OIL ANALYSIS REPORT

## Sample Rating Trend

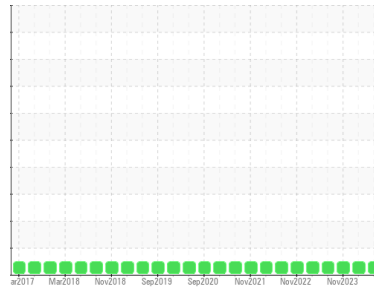

**NORMAL**



Machine Id  
**VP-6 (S/N C-4200)**  
 Component  
**Pump**  
 Fluid  
**USPI VAC 100 (--- GAL)**

### DIAGNOSIS

#### Recommendation

Resample at the next service interval to monitor.

#### Wear

All component wear rates are normal.

#### Contamination

There is no indication of any contamination in the oil. The amount and size of particulates present in the system are acceptable.

#### Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

### SAMPLE INFORMATION

method	limit/base	current	history1	history2
Sample Number	Client Info	<b>USPM37518</b>	USPM30136	USPM31235
Sample Date	Client Info	<b>04 Jun 2024</b>	22 Feb 2024	07 Nov 2023
Machine Age	hrs Client Info	<b>0</b>	0	0
Oil Age	hrs Client Info	<b>0</b>	0	0
Oil Changed	Client Info	<b>N/A</b>	N/A	N/A
Sample Status		<b>NORMAL</b>	NORMAL	NORMAL

### WEAR METALS

method	limit/base	current	history1	history2
Iron	ppm ASTM D5185m >90	<b>0</b>	7	7
Chromium	ppm ASTM D5185m >5	<b>0</b>	<1	0
Nickel	ppm ASTM D5185m >5	<b>0</b>	<1	0
Titanium	ppm ASTM D5185m >3	<b>0</b>	<1	0
Silver	ppm ASTM D5185m >3	<b>0</b>	<1	0
Aluminum	ppm ASTM D5185m >7	<b>&lt;1</b>	<1	0
Lead	ppm ASTM D5185m >12	<b>0</b>	<1	0
Copper	ppm ASTM D5185m >30	<b>0</b>	<1	0
Tin	ppm ASTM D5185m >9	<b>&lt;1</b>	<1	0
Vanadium	ppm ASTM D5185m	<b>0</b>	0	0
Cadmium	ppm ASTM D5185m	<b>0</b>	<1	0

### ADDITIVES

method	limit/base	current	history1	history2
Boron	ppm ASTM D5185m 0	<b>0</b>	0	0
Barium	ppm ASTM D5185m 0	<b>&lt;1</b>	0	0
Molybdenum	ppm ASTM D5185m 0	<b>0</b>	<1	0
Manganese	ppm ASTM D5185m	<b>&lt;1</b>	<1	0
Magnesium	ppm ASTM D5185m 0	<b>0</b>	0	0
Calcium	ppm ASTM D5185m 0	<b>3</b>	0	0
Phosphorus	ppm ASTM D5185m 1800	<b>837</b>	595	667
Zinc	ppm ASTM D5185m 0	<b>0</b>	4	2
Sulfur	ppm ASTM D5185m 0	<b>10</b>	0	24

### CONTAMINANTS

method	limit/base	current	history1	history2
Silicon	ppm ASTM D5185m >60	<b>2</b>	3	2
Sodium	ppm ASTM D5185m	<b>0</b>	0	2
Potassium	ppm ASTM D5185m >20	<b>2</b>	1	0
Water	% ASTM D6304 >.1	<b>0.031</b>	0.033	0.029
ppm Water	ppm ASTM D6304 >1000	<b>313</b>	334	290.2

### FLUID CLEANLINESS






method	limit/base	current	history1	history2
Particles >4µm	ASTM D7647 >5000	<b>4057</b>	821	263
Particles >6µm	ASTM D7647 >1300	<b>905</b>	211	98
Particles >14µm	ASTM D7647 >160	<b>60</b>	20	14
Particles >21µm	ASTM D7647 >40	<b>17</b>	3	4
Particles >38µm	ASTM D7647 >10	<b>2</b>	0	0
Particles >71µm	ASTM D7647 >3	<b>0</b>	0	0
Oil Cleanliness	ISO 4406 (c) >19/17/14	<b>19/17/13</b>	17/15/11	15/14/11

### FLUID DEGRADATION

method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g ASTM D8045 0.05	<b>0.081</b>	0.20	0.20




# OIL ANALYSIS REPORT

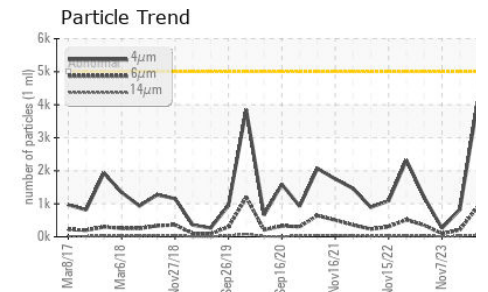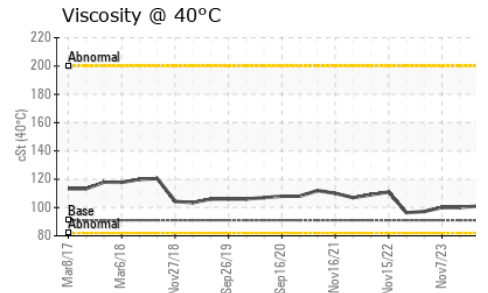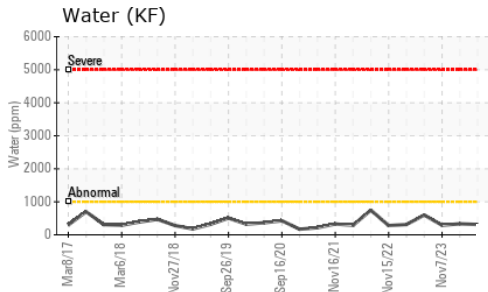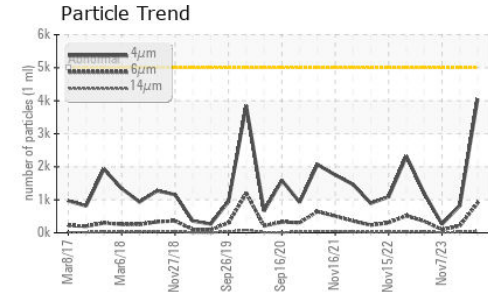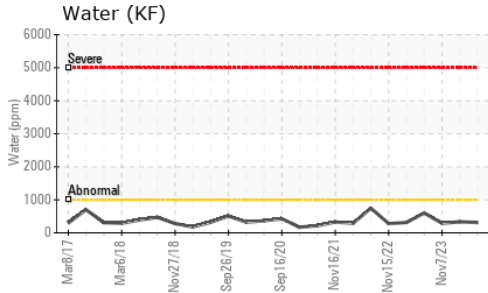





VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>.1	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D445 91	101	100	100

SAMPLE IMAGES	method	limit/base	current	history1	history2
---------------	--------	------------	---------	----------	----------

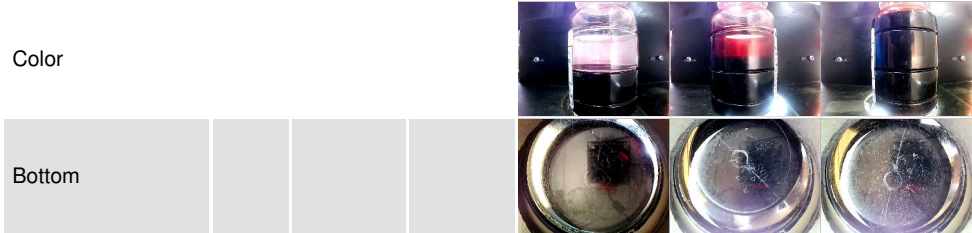

## GRAPHS

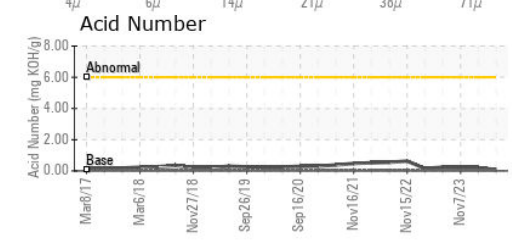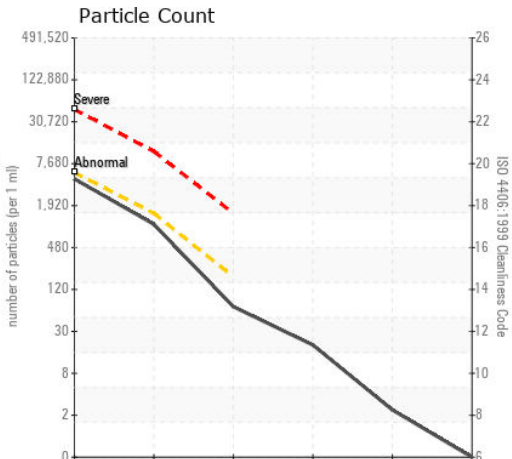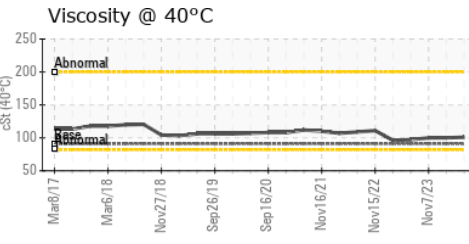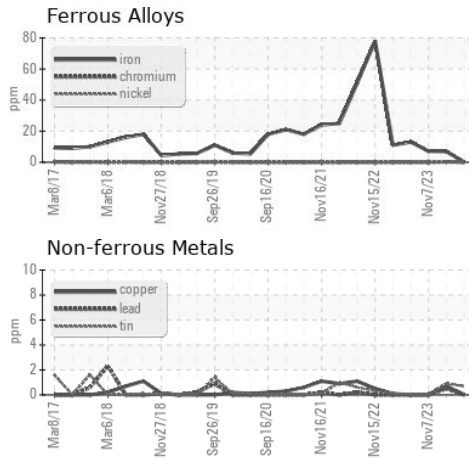

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : USPM37518      **Received** : 05 Jun 2024  
**Lab Number** : 06200155      **Tested** : 06 Jun 2024  
**Unique Number** : 11062278      **Diagnosed** : 07 Jun 2024 - Doug Bogart  
**Test Package** : IND 2

**JBS FOODS**  
 BROOKS, AB  
 CA T1R 1C6  
 Contact:

To discuss this sample report, contact Customer Service at 1-800-237-1369.  
 \* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.  
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)