

OIL ANALYSIS REPORT

Sample Rating Trend

ISO

Machine Id **20FP001** Component Hydraulic System Fluid CITGO AW68 (11 GAL)

DIAGNOSIS

Recommendation

No corrective action is recommended at this time. The filter change at the time of sampling has been noted. Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

There is a moderate amount of silt (particulates < 14 microns in size) present in the oil.

Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.


SAMPLE INFORM	1ATION	method	limit/base	current	history1	history2
Sample Number		Client Info		WC0871230	WCI2248477	
Sample Date		Client Info		24 Mar 2024	08 Nov 2013	
Machine Age	hrs	Client Info		0	0	
Oil Age	hrs	Client Info		0	0	
Oil Changed		Client Info		N/A	N/A	
Sample Status				ATTENTION	NORMAL	
WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>25	5	<1	
Chromium	ppm	ASTM D5185m	>10	2	2	
Nickel	ppm	ASTM D5185m	>10	0	<1	
Titanium	ppm	ASTM D5185m		<1	0	
Silver	ppm	ASTM D5185m		0	0	
Aluminum	ppm	ASTM D5185m	>20	5	6	
Lead	ppm	ASTM D5185m	>20	0	0	
Copper	ppm	ASTM D5185m		<1	2	
Tin	ppm	ASTM D5185m	>100	0	0	
Antimony	ppm	ASTM D5185m			0	
Vanadium	ppm	ASTM D5185m		<1	0	
Cadmium	ppm	ASTM D5185m		0	0	
	ррш		11 1. 1	-		
ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m		0	16	
Barium	ppm	ASTM D5185m		0	0	
Molybdenum	ppm	ASTM D5185m		<1	3	
Manganese	ppm	ASTM D5185m		<1	0	
Magnesium	ppm	ASTM D5185m		55	68	
Calcium	ppm	ASTM D5185m		27	109	
Phosphorus	ppm	ASTM D5185m		357	373	
Zinc	ppm	ASTM D5185m		475	458	
Sulfur	ppm	ASTM D5185m		1083	1391	
CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>50	<1	1	
Sodium	ppm	ASTM D5185m		<1	<1	
Potassium	ppm	ASTM D5185m	>20	<1	0	
Water	%	ASTM D6304	>0.1	0.003		
ppm Water	ppm	ASTM D6304	>1000	37		
FLUID CLEANLIN	ESS	method	limit/base	current	history1	history2
Particles >4µm		ASTM D7647	>40000	6 75698	196	
Particles >6µm		ASTM D7647	>10000	4115	107	
Particles >14µm		ASTM D7647	>1300	21	18	
Particles >21µm		ASTM D7647	>320	8	6	
Particles >38µm		ASTM D7647	>80	1	0	
Particles >71µm		ASTM D7647	>20	0	0	
Oil Cleanliness		ISO 4406 (c)	>22/20/17	e 23/19/12	15/14/11	
FLUID DEGRADA	TION	method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D8045		0.33	0.648	

Report Id: TALCLA [WUSCAR] 06200739 (Generated: 06/07/2024 23:48:25) Rev: 1

.33 0.648 ----Contact/Location: KEN TERRY - TALCLA



OIL ANALYSIS REPORT

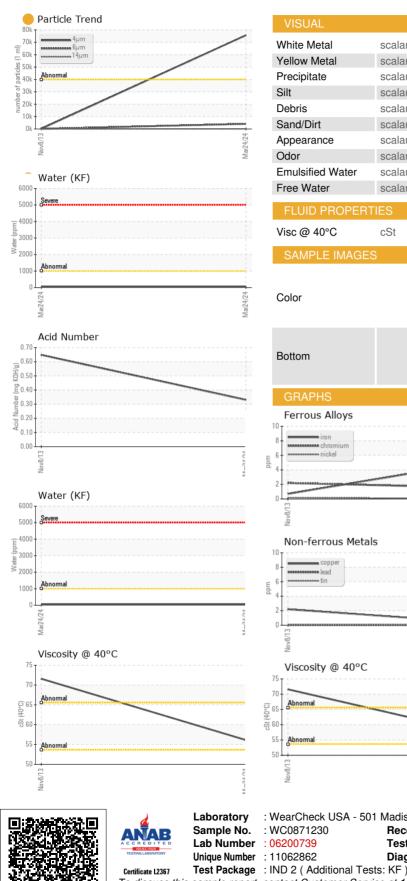

NONE NONE *Visual NONE scalar Yellow Metal *Visual NONE NONE NONE scalar NONE scalar *Visua NONE NONE scalar *Visual NONE NONE NONE *Visual NONE NONE NONE scalar NONE NONE NONE scalar *Visual NORML NORML Appearance scalar *Visual NORML *Visual NORML NORML scalar NORML *Visual **Emulsified Water** scalar >0.1 NEG NEG scalar *Visual NEG NEG FLUID PROPERTIES Visc @ 40°C cSt ASTM D445 56.1 71.59 SAMPLE IMAGES no image no image no image no imade Ferrous Alloys Particle Count 491.5 122,88 30 72 7,680 Mar24/24 4406 per 1 1,920 :1999 Cle Non-ferrous Metals 480 120 14 31 Mar24/7 214 28 Viscosity @ 40°C Acid Number (D) 0.8 풀 0.60 0.40 0.20 Acid 0.00 Mar24/24 : WearCheck USA - 501 Madison Ave., Cary, NC 27513 **GRIFOLS TALECRIS PHARMACEUTICAL** Received : 05 Jun 2024 8368 US 70 WEST Tested : 06 Jun 2024 CLAYTON, NC Diagnosed : 07 Jun 2024 - Don Baldridge US 27520 Contact: KEN TERRY To discuss this sample report, contact Customer Service at 1-800-237-1369. kenneth.terry@grifols.com * - Denotes test methods that are outside of the ISO 17025 scope of accreditation. T: (919)359-4362 F: (919)359-4767

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

Report Id: TALCLA [WUSCAR] 06200739 (Generated: 06/07/2024 23:48:25) Rev: 1

Contact/Location: KEN TERRY - TALCLA