

OIL ANALYSIS REPORT

Machine Id KAESER SK-15 2611434 (S/N 1248)

Compressor Fluid KAESER SIGMA (OEM) S-460 (--- QTS)

DIAGNOSIS

Recommendation

No corrective action is recommended at this time. Oil and filter change at the time of sampling has been noted. Resample at the next service interval to monitor.

Wear


All component wear rates are normal.

Contamination

There is a high amount of particulates present in the oil.

Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

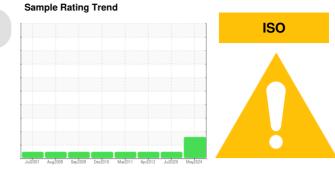


| SAMPLE INFORM | IATION | method | limit/base | current | history1 | history2 |
|--|-------------------------------|--|--|--|---|---|
| Sample Number | | Client Info | | KCP27107 | KC87746 | KC30317 |
| Sample Date | | Client Info | | 24 May 2024 | 13 Jul 2020 | 19 Apr 2012 |
| Machine Age | hrs | Client Info | | 43557 | 10796 | 46770 |
| Dil Age | hrs | Client Info | | 3000 | 3028 | 6800 |
| Oil Changed | | Client Info | | Changed | N/A | N/A |
| Sample Status | | | | ABNORMAL | NORMAL | NORMAL |
| WEAR METALS | | method | limit/base | current | history1 | history2 |
| Iron | ppm | ASTM D5185m | >50 | 0 | <1 | <1 |
| Chromium | ppm | ASTM D5185m | >10 | 0 | 0 | 0 |
| Nickel | ppm | ASTM D5185m | | 0 | 0 | 0 |
| Titanium | ppm | ASTM D5185m | | <1 | 0 | 0 |
| Silver | ppm | ASTM D5185m | | 0 | 0 | 0 |
| Aluminum | ppm | ASTM D5185m | >25 | 0 | 0 | <1 |
| Lead | ppm | ASTM D5185m | >25 | 0 | 0 | <1 |
| Copper | ppm | ASTM D5185m | | 10 | 1 | 4 |
| Tin | ppm | ASTM D5185m | >15 | 0 | 0 | 4 |
| Antimony | ppm | ASTM D5185m | 210 | | 0 | 0 |
| Vanadium | | ASTM D5185m | | <1 | 0 | 0 |
| | ppm | | | <1 | | |
| Cadmium | ppm | ASTM D5185m | | U | 0 | 0 |
| ADDITIVES | | method | limit/base | current | history1 | history2 |
| Boron | ppm | ASTM D5185m | | 0 | 0 | 0 |
| Barium | ppm | ASTM D5185m | 90 | 21 | 78 | 54 |
| Molybdenum | ppm | ASTM D5185m | | 0 | <1 | <1 |
| Manganese | ppm | ASTM D5185m | | <1 | 0 | <1 |
| Magnesium | ppm | ASTM D5185m | 90 | 22 | 97 | 71 |
| Calcium | ppm | ASTM D5185m | 2 | 0 | 4 | 0 |
| Phosphorus | ppm | ASTM D5185m | | 0 | 3 | 2 |
| Zinc | ppm | ASTM D5185m | | 15 | 6 | 9 |
| Sulfur | ppm | ASTM D5185m | | 19551 | 16954 | 16258 |
| | | ام م مالح مدر | 11 11 11 | | | history () |
| CONTAMINANTS | | method | limit/base | current | history1 | history2 |
| | ppm | ASTM D5185m | | current | history1 | <1 |
| Silicon | | | | | | |
| Silicon Sodium | ppm | ASTM D5185m | | <1 | 1 | <1 |
| Silicon Sodium Potassium | ppm ppm | ASTM D5185m ASTM D5185m | >25 >20 | <1 13 | 1 37 | <1 12 |
| Silicon Sodium Potassium Water | ppm ppm ppm | ASTM D5185m ASTM D5185m ASTM D5185m | >25 >20 | <1 13 2 | 1 37 0 | <1 12 <1 |
| Silicon Sodium Potassium Water | ppm ppm ppm % ppm | ASTM D5185m ASTM D5185m ASTM D5185m ASTM D6304 | >25 >20 >0.1 | <1 13 2 0.015 | 1 37 0 0.035 | <1 12 <1 0.032 |
| Silicon Sodium Potassium Water ppm Water FLUID CLEANLIN | ppm ppm ppm % ppm | ASTM D5185m ASTM D5185m ASTM D5185m ASTM D6304 ASTM D6304 | >25 >20 >0.1 >1000 | <1 13 2 0.015 156 | 1 37 0 0.035 353.1 | <1 12 <1 0.032 320 |
| Silicon Sodium Potassium Water opm Water FLUID CLEANLIN Particles >4µm | ppm ppm ppm % ppm | ASTM D5185m ASTM D5185m ASTM D5185m ASTM D6304 ASTM D6304 method | >25 >20 >0.1 >1000 | <1 13 2 0.015 156 current | 1 37 0 0.035 353.1 history1 | <1 12 <1 0.032 320 history2 |
| Silicon Sodium Potassium Water ppm Water FLUID CLEANLIN Particles >4µm Particles >6µm | ppm ppm ppm % ppm | ASTM D5185m ASTM D5185m ASTM D5185m ASTM D6304 ASTM D6304 method ASTM D7647 | >25 >20 >0.1 >1000 limit/base | <1 13 2 0.015 156 current 6886 ▲ 1949 | 1 37 0 0.035 353.1 history1 4387 | <1 12 <1 0.032 320 history2 205 |
| Silicon Sodium Potassium Water ppm Water FLUID CLEANLIN Particles >4µm Particles >6µm Particles >14µm | ppm ppm ppm % ppm | ASTM D5185m ASTM D5185m ASTM D6304 ASTM D6304 Method ASTM D7647 ASTM D7647 | >25 >20 >0.1 >1000 limit/base | <1 13 2 0.015 156 current 6886 | 1 37 0 0.035 353.1 history1 4387 954 | <1 12 <1 0.032 320 history2 205 111 |
| Silicon Sodium Potassium Water ppm Water FLUID CLEANLIN Particles >4µm Particles >6µm Particles >14µm Particles >21µm | ppm ppm ppm % ppm | ASTM D5185m ASTM D5185m ASTM D6304 ASTM D6304 ASTM D6304 ASTM D7647 ASTM D7647 ASTM D7647 ASTM D7647 | >25 >20 >0.1 >1000 limit/base >1300 >80 | <1 13 2 0.015 156 current 6886 1949 173 47 | 1 37 0 0.035 353.1 history1 4387 954 68 | <1 12 <1 0.032 320 history2 205 111 19 |
| Silicon Sodium Potassium Water ppm Water FLUID CLEANLIN Particles >4µm Particles >6µm Particles >14µm Particles >21µm Particles >38µm | ppm ppm ppm % ppm | ASTM D5185m ASTM D5185m ASTM D6304 ASTM D6304 ASTM D6304 ASTM D7647 ASTM D7647 ASTM D7647 ASTM D7647 ASTM D7647 | >25 >20 >0.1 >1000 limit/base >1300 >80 >20 >4 | <1 13 2 0.015 156 current 6886 ▲ 1949 ▲ 173 ▲ 47 3 | 1 37 0 0.035 353.1 history1 4387 954 68 18 | <1 12 <1 0.032 320 history2 205 111 19 6 0 |
| Silicon Sodium Potassium Water ppm Water | ppm ppm ppm % ppm | ASTM D5185m ASTM D5185m ASTM D6304 ASTM D6304 ASTM D6304 ASTM D7647 ASTM D7647 ASTM D7647 ASTM D7647 | >25 >20 >0.1 >1000 limit/base >1300 >80 >20 | <1 13 2 0.015 156 current 6886 1949 173 47 | 1 37 0 0.035 353.1 history1 4387 954 68 18 4 | <1 12 <1 0.032 320 history2 205 111 19 6 |
| Silicon Sodium Potassium Water ppm Water FLUID CLEANLIN Particles >4µm Particles >6µm Particles >14µm Particles >21µm Particles >38µm Particles >71µm | ppm ppm % ppm ESS | ASTM D5185m ASTM D5185m ASTM D6304 ASTM D6304 ASTM D6304 ASTM D7647 ASTM D7647 ASTM D7647 ASTM D7647 ASTM D7647 ASTM D7647 | >25 >20 >0.1 >1000 limit/base >1300 >80 >20 >4 >3 | <1 13 2 0.015 156 current 6886 ▲ 1949 ▲ 173 ▲ 47 3 0 | 1 37 0 0.035 353.1 history1 4387 954 68 18 4 1 | <1 12 <1 0.032 320 history2 205 111 19 6 0 0 |


Report Id: BLOGRE [WUSCAR] 06200748 (Generated: 06/07/2024 17:31:12) Rev: 1


0.34 0.303 0.390 Contact/Location: SERVICE MANAGER ? - BLOGRE





OIL ANALYSIS REPORT



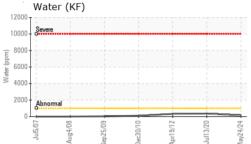

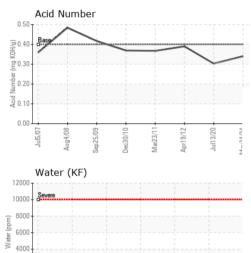








| VISUAL | | method | limit/base | current | history1 | history2 |
|------------------|--------|-----------|------------|---------|----------|----------|
| White Metal | scalar | *Visual | NONE | NONE | NONE | NONE |
| Yellow Metal | scalar | *Visual | NONE | NONE | NONE | NONE |
| Precipitate | scalar | *Visual | NONE | NONE | NONE | NONE |
| Silt | scalar | *Visual | NONE | NONE | NONE | NONE |
| Debris | scalar | *Visual | NONE | LIGHT | VLITE | VLITE |
| Sand/Dirt | scalar | *Visual | NONE | NONE | NONE | NONE |
| Appearance | scalar | *Visual | NORML | NORML | NORML | NORML |
| Odor | scalar | *Visual | NORML | NORML | NORML | NORML |
| Emulsified Water | scalar | *Visual | >0.1 | NEG | NEG | NEG |
| Free Water | scalar | *Visual | | NEG | NEG | NEG |
| FLUID PROPERT | IES | method | limit/base | current | history1 | history2 |
| Visc @ 40°C | cSt | ASTM D445 | 46 | 44.0 | 44.3 | 45.69 |
| SAMPLE IMAGES | | method | limit/base | current | history1 | history2 |
| | | | | | | |

Color



Bottom

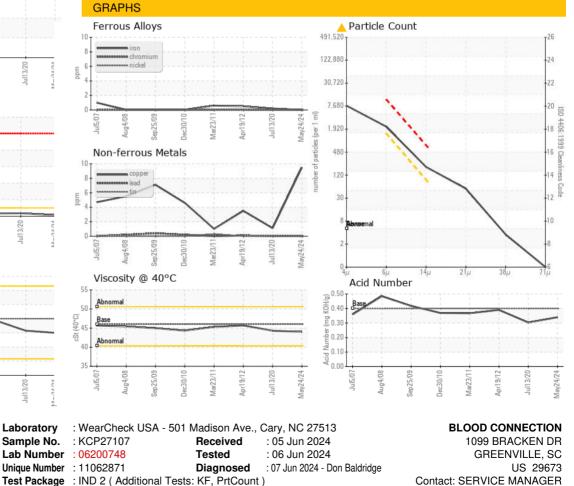

To discuss this sample report, contact Customer Service at 1-800-237-1369. * - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

Contact/Location: SERVICE MANAGER ? - BLOGRE

Page 2 of 2

T:

F:

Certificate 12367