


# **OIL ANALYSIS REPORT**

Sample Rating Trend

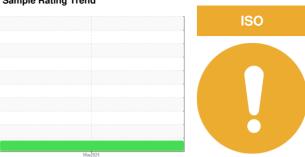

Machine Id

# 9260402 (S/N 2294)

Compressor

KAESER SIGMA (OEM) S-460 (--- GAL)

#### Recommendation

No corrective action is recommended at this time. Oil and filter change at the time of sampling has been noted. Resample at the next service interval to monitor.

#### Wear

All component wear rates are normal.

### Contamination

There is a moderate amount of silt (particulates < 14 microns in size) present in the oil.


#### Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

|                  |          |              |            | May2024         |          |          |
|------------------|----------|--------------|------------|-----------------|----------|----------|
|                  |          |              |            | mdy2024         |          |          |
| SAMPLE INFORM    | MATION   | method       | limit/base | current         | history1 | history2 |
| Sample Number    |          | Client Info  |            | KC129491        |          |          |
| Sample Date      |          | Client Info  |            | 30 May 2024     |          |          |
| Machine Age      | hrs      | Client Info  |            | 17              |          |          |
| Oil Age          | hrs      | Client Info  |            | 17              |          |          |
| Oil Changed      |          | Client Info  |            | Changed         |          |          |
| Sample Status    |          |              |            | ATTENTION       |          |          |
| WEAR METALS      |          | method       | limit/base | current         | history1 | history2 |
| Iron             | ppm      | ASTM D5185m  | >50        | 0               |          |          |
| Chromium         | ppm      | ASTM D5185m  | >10        | 0               |          |          |
| Nickel           | ppm      | ASTM D5185m  | >3         | 0               |          |          |
| Titanium         | ppm      | ASTM D5185m  | >3         | <1              |          |          |
| Silver           | ppm      | ASTM D5185m  | >2         | 0               |          |          |
| Aluminum         | ppm      | ASTM D5185m  | >10        | 0               |          |          |
| Lead             | ppm      | ASTM D5185m  | >10        | 0               |          |          |
| Copper           | ppm      | ASTM D5185m  | >50        | <1              |          |          |
| Tin              | ppm      | ASTM D5185m  | >10        | 0               |          |          |
| Vanadium         | ppm      | ASTM D5185m  |            | <1              |          |          |
| Cadmium          | ppm      | ASTM D5185m  |            | 0               |          |          |
| ADDITIVES        |          | method       | limit/base | current         | history1 | history2 |
| Boron            | ppm      | ASTM D5185m  |            | 0               |          |          |
| Barium           | ppm      | ASTM D5185m  | 90         | 73              |          |          |
| Molybdenum       | ppm      | ASTM D5185m  |            | 0               |          |          |
| Manganese        | ppm      | ASTM D5185m  |            | <1              |          |          |
| Magnesium        | ppm      | ASTM D5185m  | 90         | 78              |          |          |
| Calcium          | ppm      | ASTM D5185m  | 2          | 0               |          |          |
| Phosphorus       | ppm      | ASTM D5185m  |            | 0               |          |          |
| Zinc             | ppm      | ASTM D5185m  |            | 0               |          |          |
| CONTAMINANTS     |          | method       | limit/base | current         | history1 | history2 |
| Silicon          | ppm      | ASTM D5185m  | >25        | <1              |          |          |
| Sodium           | ppm      | ASTM D5185m  |            | 4               |          |          |
| Potassium        | ppm      | ASTM D5185m  | >20        | 5               |          |          |
| Water            | %        | ASTM D6304   | >0.05      | 0.026           |          |          |
| ppm Water        | ppm      | ASTM D6304   | >500       | 266             |          |          |
| FLUID CLEANLIN   | ESS      | method       | limit/base | current         | history1 | history2 |
| Particles >4µm   |          | ASTM D7647   |            | 3527            |          |          |
| Particles >6µm   |          | ASTM D7647   | >1300      | <u> </u>        |          |          |
| Particles >14µm  |          | ASTM D7647   | >80        | 42              |          |          |
| Particles >21µm  |          | ASTM D7647   | >20        | 3               |          |          |
| Particles >38μm  |          | ASTM D7647   | >4         | 1               |          |          |
| Particles >71μm  |          | ASTM D7647   | >3         | 0               |          |          |
| Oil Cleanliness  |          | ISO 4406 (c) | >/17/13    | <b>19/18/13</b> |          |          |
| FLUID DEGRADA    | TION     | method       | limit/base | current         | history1 | history2 |
| Acid Number (AN) | mg KOH/g | ASTM D8045   | 0.4        | 0.34            |          |          |



## **OIL ANALYSIS REPORT**

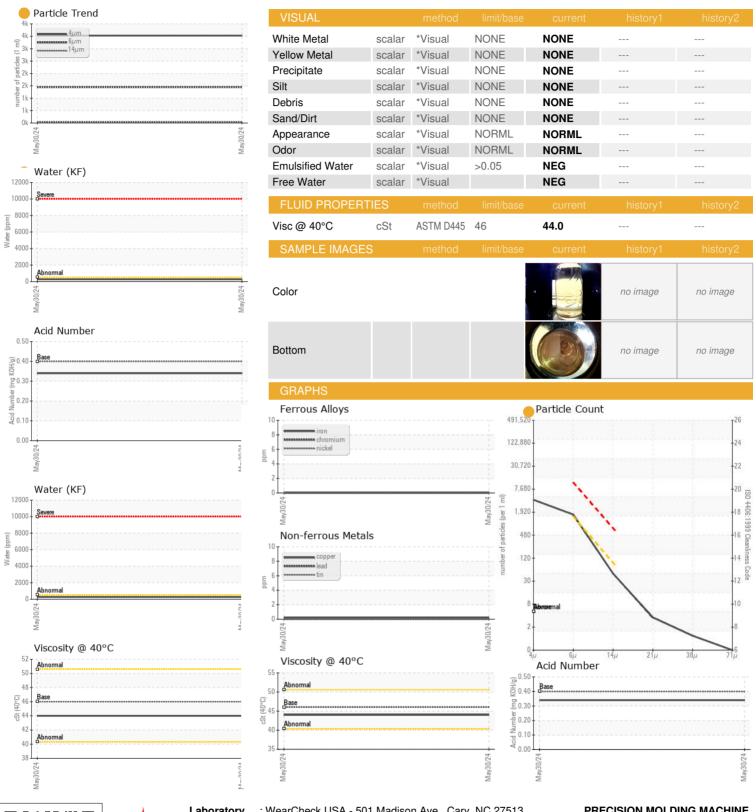





Certificate 12367

Laboratory Sample No. : KC129491 **Lab Number** : 06200755 Unique Number : 11062878 Test Package : IND 2

: WearCheck USA - 501 Madison Ave., Cary, NC 27513 Received : 05 Jun 2024 **Tested** : 06 Jun 2024

> Diagnosed : 07 Jun 2024 - Don Baldridge

PRECISION MOLDING MACHINE 3648 DECK RD

GRAY COURT, SC US 29645

Contact: Service Manager

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:

F: